

Location: _____





T1200-F

12" Wide, Frame and Grate System

Specification: MIFAB® Series T1200-F, 12" wide, frame and grate system available in 24" long increments with a heavy duty angle iron frame assembly (1 3/4" x 1 3/4" x 1.875") for all grates to secure to and finished with an acid resistant powder epoxy coating. Each 24" long section has two 1" x 3" long anchor tabs / leveling devices for securing into the surrounding concrete. Complete with MIFAB's standard ductile iron grate (T1200-4). Load Class F.

Function: Used in airports, car washes, malls, parking lots, factories and any other facilities that require areas of surface drainage. The standard heavy duty angle iron frame provides for maximum load bearing capability. No body is provided as the channel is typically formed into the concrete by the installer. An infinite number of sections can be assembled together to serve any requirement.

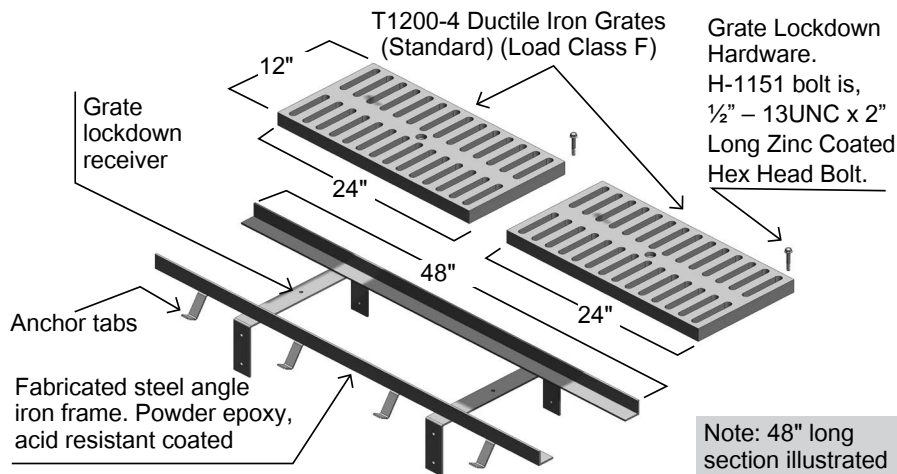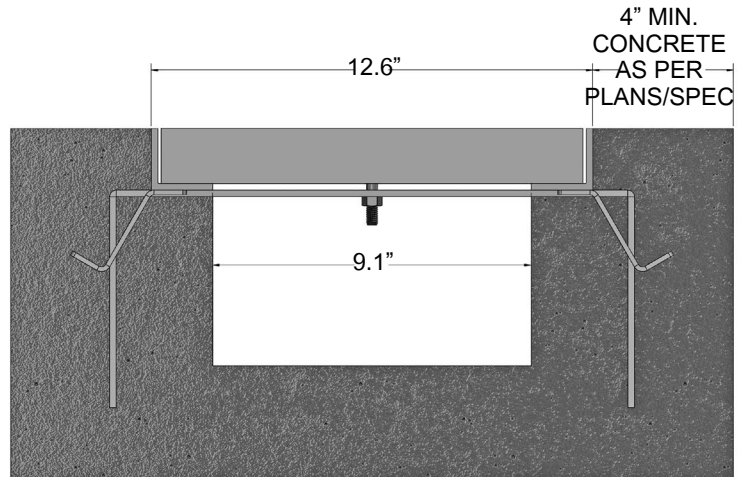

SUFFIX OPTIONAL VARIATIONS

- ☐ -3 Stainless steel grate and frame veneer – per section
- ☐ -6 Vandal proof – per grate (H-1072)

SUFFIX OPTIONAL VARIATIONS

- ☐ -11 All acid resistant epoxy coated – per section
- ☐ -13 All galvanized – per section

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____