

Location:





T2000

12" WIDE, PRESLOPED, POLYPROPYLENE TRENCH DRAIN SYSTEM

Specification: MIFAB® Series T2000, 12" wide, 39.40" long, pre-sloped (0.5% per body) or neutral trench drain system. Body is manufactured from polypropylene. Each body has six tabs for #5 rebar tie down and leveling. Bodies have interlocking ends, a radiused bottom for efficient liquid drainage and have staggered, semi-circular cutouts on each side at the bottom to enable concrete flow underneath the body. End and bottom outlets are available in 4" and 6" no hub outlet connections. A heavy duty angle iron frame is supplied with all body sections for all grates to secure to. Grate options include ductile iron, galvanized steel, stainless steel and plastic along with grate lockdown hardware for each grate to secure to the body. These grates are available in Class A, B, C, D and E along with ADA and FAA compliance (see pages 27-28). End caps and catch basins are also available.

Function: Used in airports, car washes, malls, gas stations, parking lots, golf courses, factories and any other facilities that require large areas of surface drainage. The lightweight and chemical resistant polypropylene body provides for long life. The standard heavy duty angle iron frame supplied with all bodies provides for maximum load bearing capability. Water resistant sealant recommended between sections for indoor installations. An infinite number of body sections can be assembled together to serve any length requirement 45 and 90 degree body sections are available.

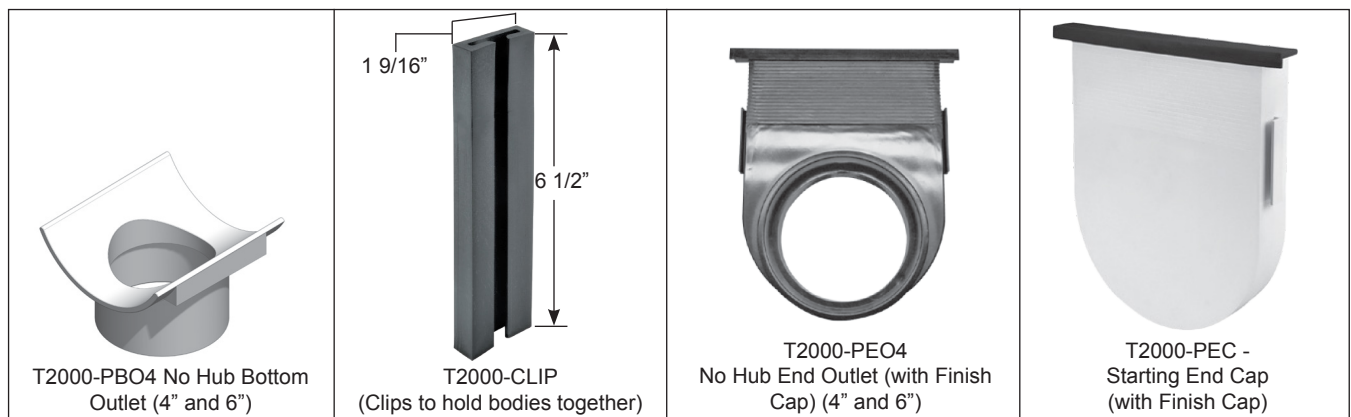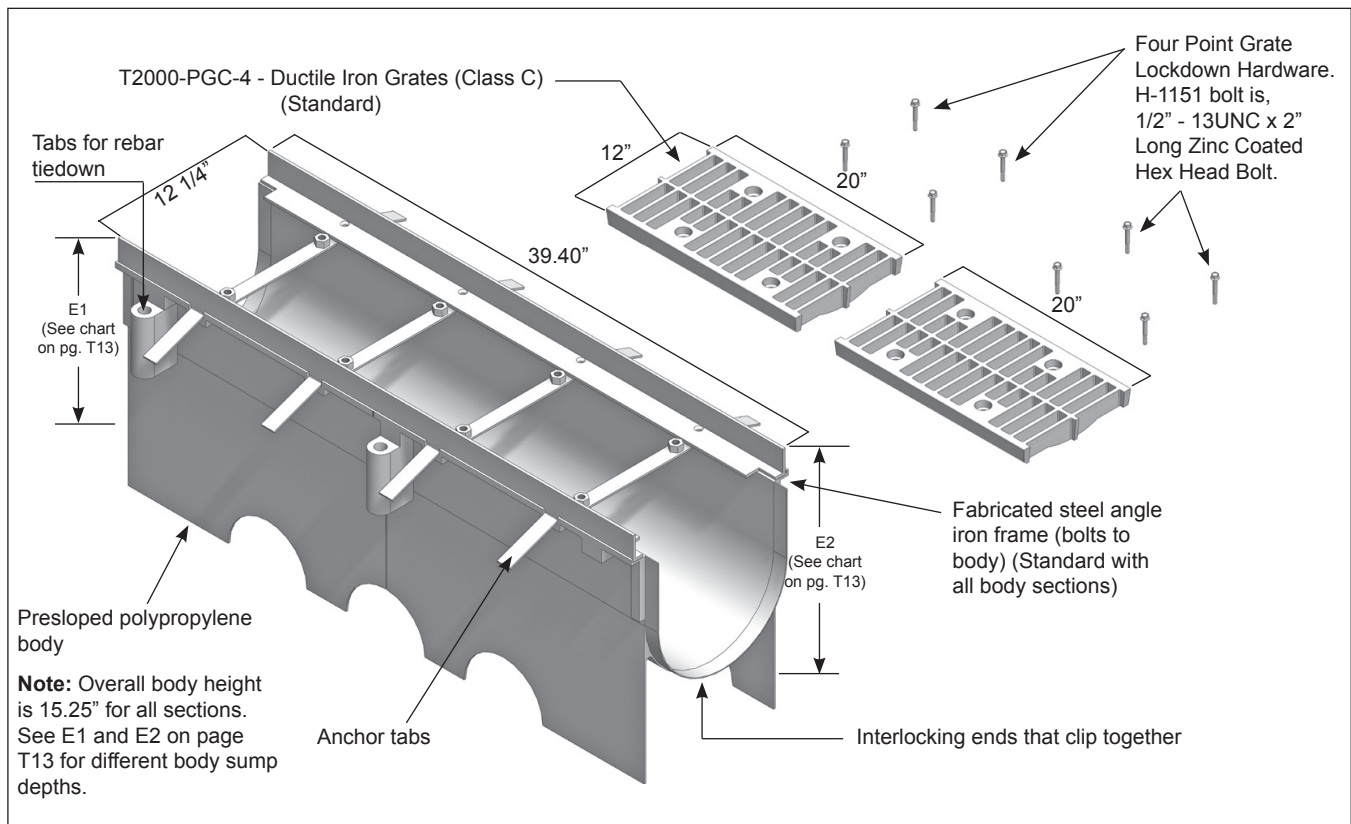

Job Name:
 Section No:
 Schedule No:

Page No:
 Contract:
 Purchase Order No:

Location: **T2000****12" WIDE, PRESLOPED, POLYPROPYLENE TRENCH DRAIN SYSTEM**

Body Part Number	Body Sump Depth		Overall Body Depth	Max. Flow Rate			Weight (Less Grate)	
	E1 (Min.)	E2 (Max.)		GPM	LPS	CFS	Lbs.	Kg.
			Inches	Gallons per Minute	Litres per Second	Cubic Feet per Second		
● T2001N	10.24" (260)	10.24" (260)	16.25"	278	17.95	0.619	18.00	8.00
● T2001	10.24" (260)	10.43" (265)	16.25"	278	17.95	0.619	18.00	8.00
● T2002	10.43" (265)	10.62" (270)	16.25"	387	24.96	0.861	18.00	8.00
● T2003	10.62" (270)	10.81" (275)	16.25"	500	32.27	1.113	18.00	8.00
● T2004N	10.81" (275)	10.81" (275)	16.25"	500	32.27	1.113	18.00	8.00
● T2004	10.81" (275)	11.00" (279)	16.25"	616	39.75	1.371	18.00	8.00
● T2005	11.00" (279)	11.19" (284)	16.25"	734	47.36	1.633	18.00	8.00
● T2006	11.19" (284)	11.38" (289)	16.25"	855	55.16	1.902	18.00	8.00
● T2007	11.38" (289)	11.57" (293)	16.25"	975	62.93	2.170	18.00	8.00
● T2008N	11.57" (293)	11.57" (293)	16.25"	975	62.93	2.170	18.00	8.00
● T2008	11.57" (293)	11.76" (298)	16.25"	1,222	78.85	2.719	18.00	8.00
● T2009	11.76" (298)	11.95" (303)	16.25"	1,345	86.8	2.993	18.00	8.00
● T2010	11.95" (303)	12.14" (307)	16.25"	1,470	94.86	3.271	18.00	8.00
● T2011	12.14" (307)	12.33" (312)	16.25"	1,595	102.92	3.549	18.00	8.00
● T2012N	12.33" (312)	12.33" (312)	16.25"	1,595	102.92	3.549	18.00	8.00
● T2012	12.33" (312)	12.52" (318)	16.25"	1,720	110.98	3.827	18.00	8.00

SUFFIX OPTIONAL VARIATIONS


☐ -4	Extra heavy duty ductile iron slotted grate with steel frame, Class C (Standard)	☐ -PB04
☐ -4-11	Extra heavy duty A.R.E. coated ductile iron slotted grate with steel frame, Class C	☐ -PB06
☐ -4-13	Extra heavy duty galvanized ductile iron slotted grate and steel frame, Class C	☐ -PB08
☐ -6	Vandal resistant grate lockdown hardware	☐ -PBDS
☐ -45	45 Degree body section	☐ -PC
☐ -90	90 Degree body section	☐ -PCSS
☐ -CF	Cross fabrication	☐ -PEC
☐ -F-4	Special duty ductile iron slotted grate with steel frame, Class F	☐ -PE04
☐ -F4-11	Special duty A.R.E. coated ductile iron slotted grate with steel frame, Class F	☐ -PE06
☐ -F4-13	Special duty galvanized ductile iron slotted grate with steel frame, Class F	☐ -PE08
☐ -FS	Fabricated stainless steel (Type 304) slotted grate with stainless steel frame, Class A	☐ -PGC-4-3
☐ -LGHP	Fabricated heel proof longitudinal slotted steel grate with steel frame, Class B	☐ -PGF
		☐ -PGG
		☐ -PS

SUFFIX OPTIONAL VARIATIONS

☐ -PB04	4" no hub bottom outlet
☐ -PB06	6" no hub bottom outlet
☐ -PB08	8" no hub bottom outlet
☐ -PBDS	Bottom dome strainer
☐ -PC	Fabricated 10 gauge steel solid cover and steel frame, A.R.E. coated, Class B
☐ -PCSS	Fabricated 10 gauge stainless steel solid cover with stainless steel frame, A.R.E. coated, Class B
☐ -PEC	Closed end cap
☐ -PE04	4" no hub end outlet
☐ -PE06	6" no hub end outlet
☐ -PE08	8" no hub end outlet
☐ -PGC-4-3	Extra heavy duty ductile slotted iron grate with Type 304 stainless steel veneer, Class C
☐ -PGF	Slotted, galvanized steel light duty grate with steel frame, Class A
☐ -PGG	Perforated, galvanized steel light duty grate with steel frame, ADA compliant, Class A
☐ -PS	Heavy duty PVC heel proof grate with steel frame, Class A

SUFFIX OPTIONAL VARIATIONS

☐ -PVC	Heavy Duty PVC heel proof grate with steel frame, Class A
☐ -RFS	Fabricated, reinforced stainless steel (Type 304) slotted grate with stainless steel frame
☐ -RG	Reinforced, perforated, galvanized steel light duty grate with steel frame, ADA compliant, Class B
☐ -RGS	Reinforced, slotted, galvanized steel light duty grate with steel frame, Class B
☐ -RPS	Fabricated reinforced stainless steel (Type 304) perforated grate with stainless steel frame, Class B
☐ -SBG	Fabricated stainless steel (Type 304) bar grate with stainless steel frame, Class C
☐ -SOF	Side outlet fabrication
☐ -TEE	Fabricated steel tee

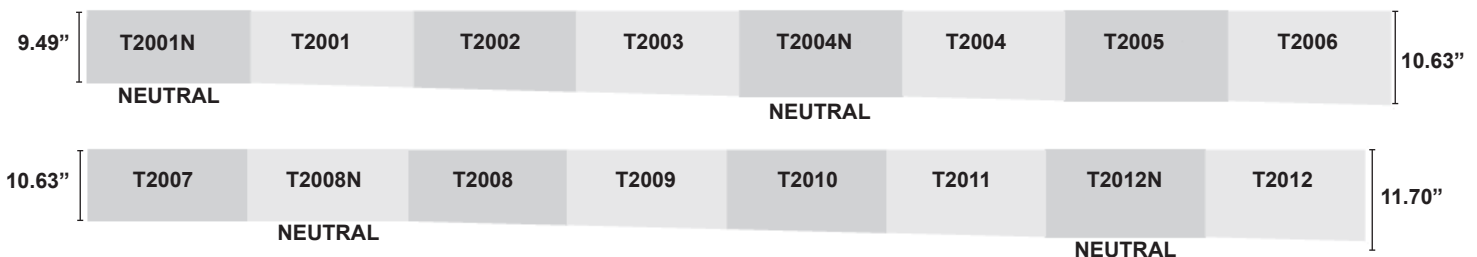

Job Name:

Section No:

Schedule No:

Page No:

Contract:

Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880