

SUBMITTAL DATA SHEET

Product Name: Wired Controller
Model Number: KJR-120N(X6W)



Wired Controller

Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____


SPECS

Code	17317100011597	
Model	KJR-120N(X6W)	
Power supply	V	12 VDC
Product size (HxWxD)	inch	4-3/4 x 4-3/4 x 7/8
	mm	120 x 120 x 20.6
Net weight	lbs	0.5
	kg	0.228
Ambient temperature	°F	32-110
	°C	0-43
Ambient humidity	RH	40%-90%
Material	Front panel	PC/ABS
	Back cover	PC/ABS




Dimension


unit: inch (mm)

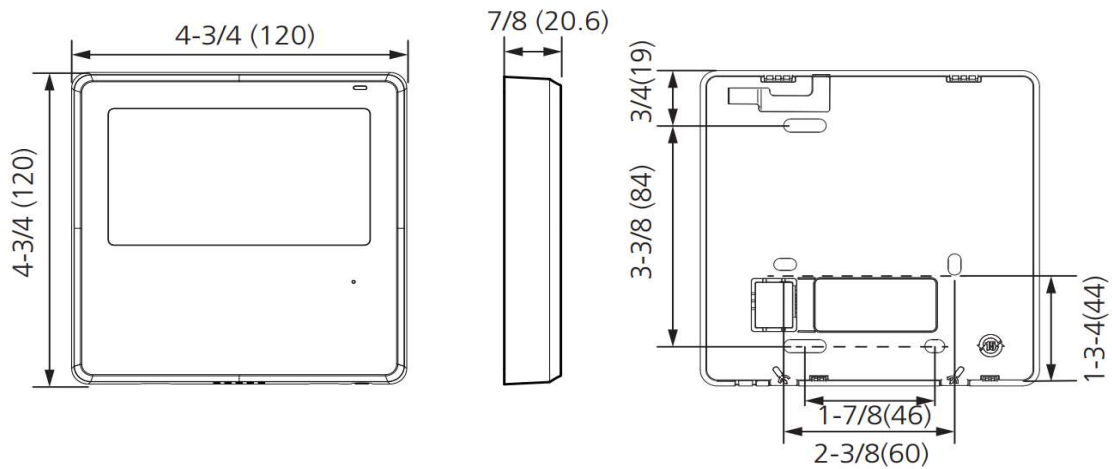

Display

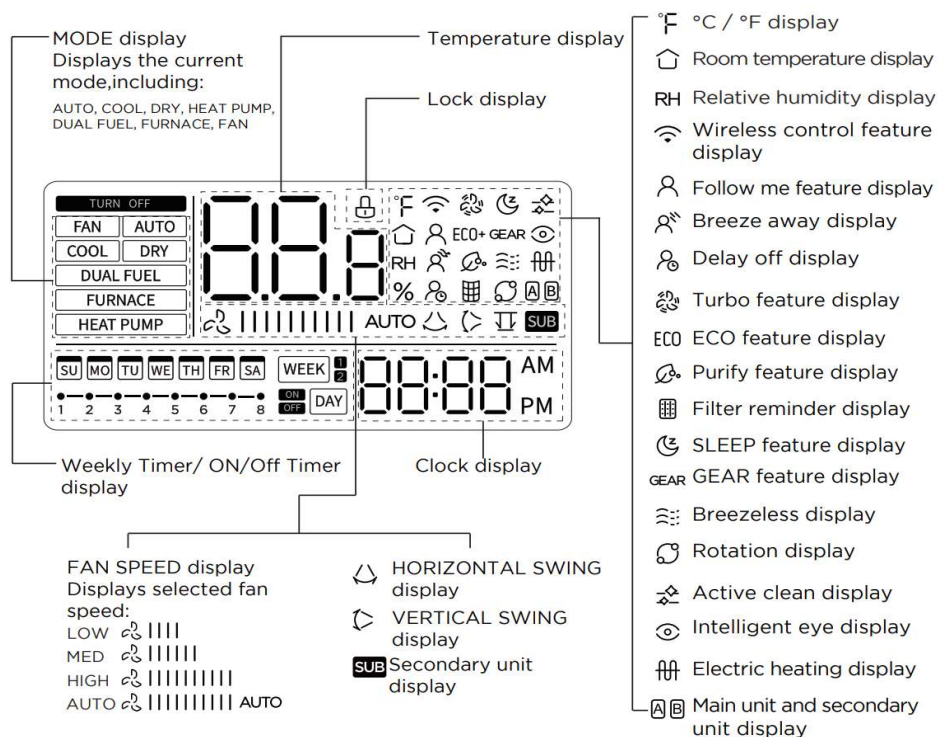


Button

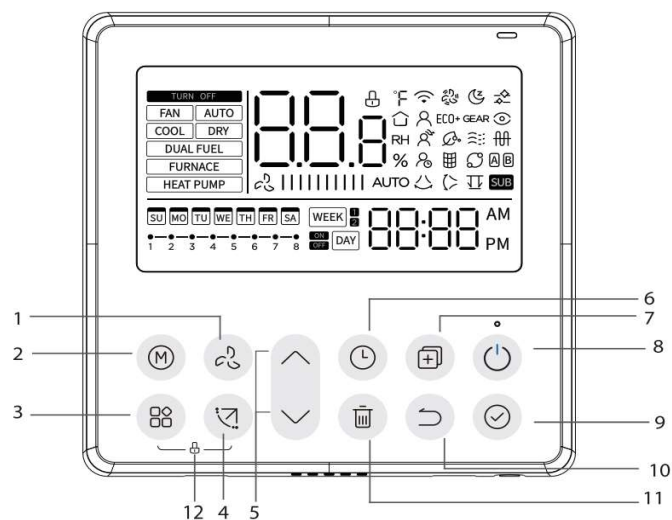

- 1 FAN SPEED button
- 2 MODE button
- 3 FUNC. button
- 4 SWING button
- 5 ADJUST button
- 6 TIMER button

- 7 COPY button
- 8 POWER button
- 9 CONFIRM button
- 10 BACK button
- 11 DAY OFF/DELAY button
- 12 CHILD LOCK button

Feature and function

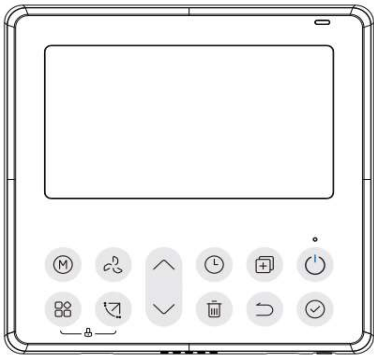

Feature:

- LCD display.
- Malfunction code display: it can display the error code, helpful for service.
- 4-way wire layout design, no raised part at backside, more convenient to place the wires and install the device.
- Room temperature display.
- Weekly Timer.

Function:

- Mode: Choose Auto-Cool-Dry-Heat-Fan
- Fan speed: Auto/Low/Med/High speed
- Swing (on some models)
- Timer ON/OFF
- Temp setting
- Weekly timer
- Follow me
- Turbo
- 24-hour System
- 12-hour System
- Auto-restart
- Individual louver control (on some models)
- Automatic airflow test
- Rotation & Back-up
- Dual Control
- Group Control
- Child Lock
- LCD display
- Clock

Compatibility chart

[illegible]