

Location: _____



T1700-PB-13 with Galvanized Steel Integral Rail








Specification:

MIFAB®s T1700-PB-13 series channels shall be 39.4" (1000 mm) long with a 8" (200 mm) internal width. Interconnecting channels sections are made from high strength Polymer Concrete and available in sloping and non-sloping (neutral) channels. Each channel comes with a standard 4 mm galvanized steel edge rail which is mechanically embedded in the channel.


Installation devices, plastic end cap/outlet cap, and catch basins are available accessories. System comes complete with 6" preformed bottom outlets at the T1700, T1710, and T1720 channel locations. Grates (separate Specification Sheets) are available in in Load Class A-E in a variety of materials. Grates utilize the patented "Clipfix" locking mechanism.

CHANNEL MODEL #	BODY TYPE Sloped - .5% Neutral - 0%	INVERT BODY DEPTH		OVERALL BODY DEPTH		MAXIMUM FLOW RATE GPM	WEIGHT (LESS GRATE) LBS.
		E1 (Min.)	E2 (Max.)	E1 (Min.)	E2 (Max.)		
T1700N-PB-13	Neutral	7.29"	7.29"	9.06"	9.06"	473	63.21
T1700N-PB-13-B08	Neutral	7.29"	7.29"	9.06"	9.06"	473	63.21
T700N-PB-13-500	Neutral	7.29"	7.29"	9.06"	9.06"	473	32.36
T1701-PB-13	Sloped	7.29"	7.49"	9.06"	9.06"	498	63.34
T1702-PB-13	Sloped	7.49"	7.68"	9.26"	9.45"	521	64.04
T1703-PB-13	Sloped	7.68"	7.88"	9.45"	9.65"	545	64.74
T1704-PB-13	Sloped	7.88"	8.08"	9.65"	9.85"	571	65.44
T1705-PB-13	Sloped	8.08"	8.27"	9.85"	10.04"	596	66.13
T1706-PB-13	Sloped	8.27"	8.47"	10.04"	10.24"	621	66.83
T1707-PB-13	Sloped	8.47"	8.67"	10.24"	10.44"	648	67.53
T1708-PB-13	Sloped	8.67"	8.86"	10.44"	10.63"	675	68.23
T1709-PB-13	Sloped	8.86"	9.06"	10.63"	10.83"	704	68.93
T1710-PB-13	Sloped	9.06"	9.26"	10.83"	11.03"	732	70.33
T1710-PB-13-B06	Sloped	9.06"	9.26"	10.83"	11.03"	732	70.33
T1710N-PB-13	Neutral	9.26"	9.26"	11.03"	11.03"	732	70.77
T1710N-PB-13-B06	Neutral	9.26"	9.26"	11.03"	11.03"	732	71.87
T1710N-PB-13-500	Neutral	9.26"	9.26"	11.03"	11.03"	732	35.94
T1711-PB-13	Sloped	9.26"	9.45"	11.03"	11.23"	777	71.03
T1712-PB-13	Sloped	9.45"	9.65"	11.23"	11.42"	807	71.73
T1713-PB-13	Sloped	9.65"	9.85"	11.42"	11.62"	837	72.42
T1714-PB-13	Sloped	9.85"	10.04"	11.62"	11.82"	869	73.13
T1715-PB-13	Sloped	10.04"	10.24"	11.82"	12.01"	902	73.82
T1716-PB-13	Sloped	10.24"	10.44"	12.01"	12.21"	935	74.52
T1717-PB-13	Sloped	10.44"	10.63"	12.21"	12.41"	968	75.22
T1718-PB-13	Sloped	10.63"	10.83"	12.41"	12.60"	1003	75.92
T1719-PB-13	Sloped	10.83"	11.03"	12.60"	12.80"	1038	76.62
T1720-PB-13	Sloped	11.03"	11.23"	12.80"	13.00"	1105	77.32
T1720-PB-13-B06	Sloped	11.03"	11.23"	12.80"	13.00"	1105	77.32
T1720N-PB-13	Neutral	11.23"	11.23"	13.00"	13.00"	1105	79.87
T720N-PB-13-B06	Neutral	11.23"	11.23"	13.00"	13.00"	1105	79.81
T1720N-PB-13-500	Neutral	11.23"	11.23"	13.00"	13.00"	1105	36.38

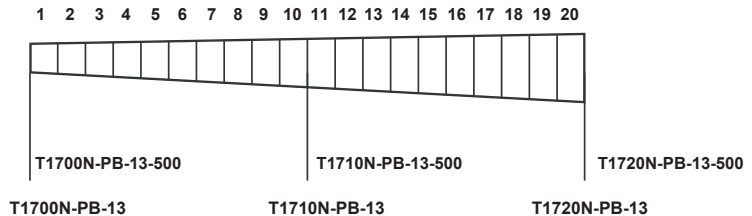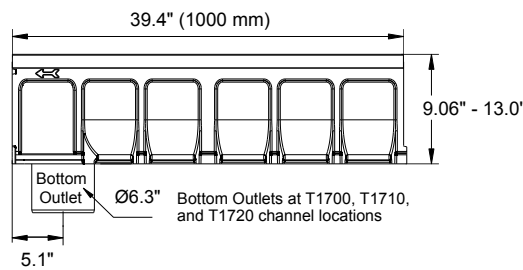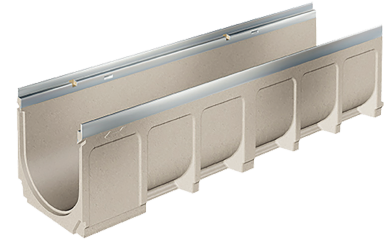


T1700-CB820-13
Galvanized Steel
Catch Basin
Sediment bucket
included


**CATCH BASIN
TOP ASSEMBLY**



**CATCH BASIN
OPTIONAL
EXTENSION**



8\"/>



CLIPFIX ADVANTAGE

The MEA polymer concrete channels have been designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

Revision Date: 2022-05-19

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880