

Features

- Solid brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valve cartridges
- Spout assembly with integral supply hoses
- Pop-up drain with tailpiece
- 6.0" (15.2 cm) spout height at outlet
- 5.25" (13.3 cm) spout reach (c-c)
- For 8" (20.3 cm) centers - Maximum 20" (50.8 cm)
- ADA Compliant
- 1.2 GPM (4.5 LPM) Max

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1-18
- IAPMO/cUPC
- NSF/ANSI 61, SECTION 9
- NSF/ANSI 372
- IPC
- ADA & ICC/ANSI A117.1
- Energy Policy Act of 1992
- EPA WaterSense
- California Energy Commission
- All applicable US Federal and State material regulations

Colors / Finishes

- 10B: Oil Rubbed Bronze
- 15: Polished Nickel
- 15S: Satin Nickel - PVD
- 26: Polished Chrome
- Other: Refer to the Newport Brass catalog for additional color/finish options.

Widespread Lavatory Faucet 2490



Specified Model

Model	Description	Colors Finishes				
2490	Widespread Lavatory Faucet	☐ 10B	☐ 15	☐ 15S	☐ 26	☐ Other

Product Specification Add "Color / Finish" suffix to Model number, below.

The two-handle Widespread Lavatory Faucet shall be made of solid brass construction. Faucet shall incorporate a spout assembly with integral supply hoses and feature brass valve bodies with quarter-turn washerless ceramic disc valve cartridges. Faucet shall have a 1.2 gallon (4.5 liter) per minute maximum flow rate. Product shall be for 8" (20.3 cm) centers - Maximum 20" (50.8 cm). Product shall incorporate a 6.0" (15.2 cm) spout height at outlet and a 5.25" (13.3 cm) spout reach (c-c). Faucet shall include a pop-up drain with tailpiece and incorporate ADA compliant contemporary lever handles. Widespread Lavatory Faucet shall be Newport Brass Model 2490/____.

PRODUCT DIMENSIONS *(Units are in inches)*

Technical drawing showing three types of deck penetrations with dimensions in inches [millimeters].

Left Penetration:


- Top clearance: 4.00 [101.6] MIN
- Amount of stem req. from deck: 1.42 [36]
- Max deck thickness: 2.25 [57.2]

Middle Penetration:

- Top clearance: 4.00 [101.6] MIN
- Max deck thickness: 2.00 [50.8]
- Stem diameter: $\phi 1.85$ [47]
- Deck flange diameter: $\phi 1.30$ [33]

Right Penetration:

- Top clearance: 4.00 [101.6] MIN
- Stem diameter: $\phi 1.85$ [47]
- Deck flange diameter: $\phi 1.34$ [33.9]
- Deck flange diameter: $\phi 1.00$ [25.4]
- Bottom clearance: 2.56 [65]
- Bottom clearance: 3.45 [87.6]
- Outlets/Inlets: 2X 1/2 NPSM OUTLETS, 2X 1/2 NPSM INLETS

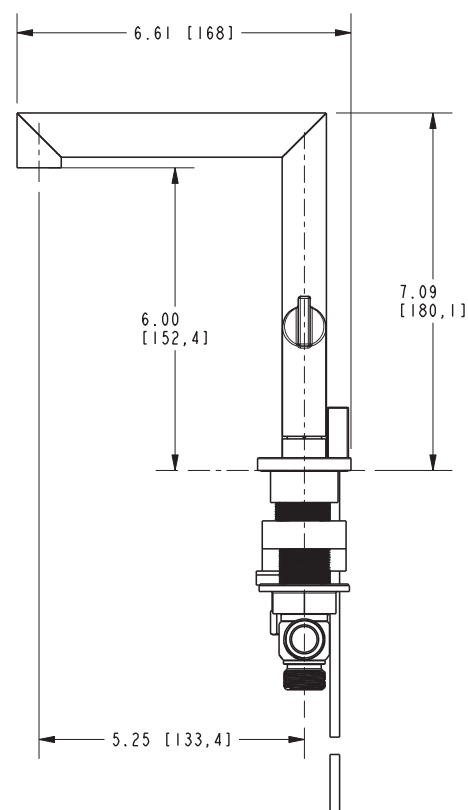

NEWPORT BRASS
Flawless Beauty. From Faucet to Finish.™