

SKYLAR

Features

Solid brass construction
2.50" (6.4 cm) spout height at outlet
8.35" (21.2 cm) spout reach (c-c)
Intended for use with Newport Brass rough valve kit (Required Accessory) which incorporates the following:
-Brass valve bodies and quick-connect spout fitting
-Quarter-turn washerless ceramic disc 3/4" valve cartridges
ADA Compliant

ROMAN TUB DECK TRIM


3-2566



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1-18
IAPMO/cUPC
IPC
ADA & ICC/ANSI A117.1
All applicable US Federal and State material regulations

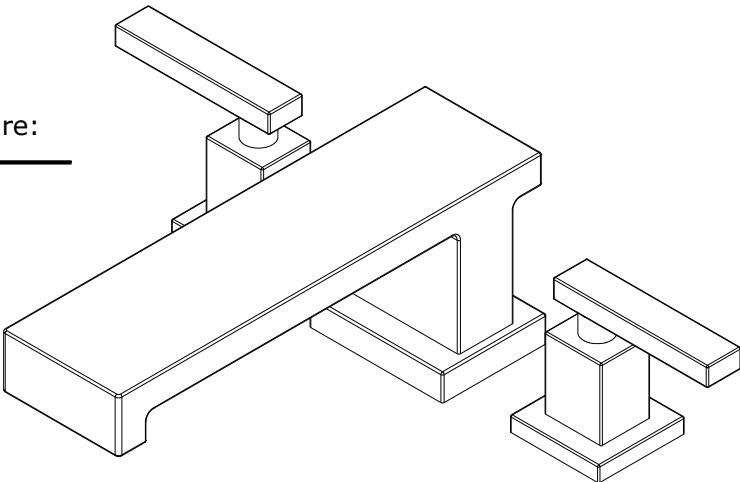

ACCESSORY REQUIRED	
System Element	Deck Tub Valve
Description	2-Valve Assembly With Quick Connect Spout Adapter
Inlet/Outlet Size	3/4" / 3/4"
Part Number	1-665
Image	The image shows three components of the accessory: two identical valve bodies with quarter-turn handles and one quick-connect spout adapter. The valve bodies are cylindrical with a flat top and a threaded bottom. The spout adapter is a small, cylindrical fitting with a threaded end and a quick-connect port.

PRODUCT DIMENSIONS *(Units are in inches)*

Technical drawing of the 1000 Series Deck Mounting Assembly, showing three views: side, top, and front. The drawing includes dimensions for the mounting plate, the deck thickness, and the required amount of stem from the deck.

Side View Dimensions:

- Mounting plate width: 3.00 [76,2]
- Mounting plate height: 3.05 [77,5]
- Deck thickness: 1.69 [43] (MAX DECK THICKNESS)
- Amount of stem required from deck: 1.37 [34,8]

Top View Dimensions:

- Mounting plate diameter: 3.13 [79,6]
- Deck thickness: 1.34 [33,9]

Front View Dimensions:

- Mounting plate diameter: 1.19 [30,2]
- Deck thickness: 1.69 [43] (MAX DECK THICKNESS)

Labels:

- 1000 Series Deck Mounting Assembly
- MAX DECK THICKNESS
- 2X 3/4 NPT OUTLETS
- 2X 3/4 NPT INLETS
- 3/4 NPT INLET
- AMOUNT OF STEM REQ. FROM DECK

