

EAST LINEAR

Features

Solid brass construction
Brass valve bodies
Quarter-turn washerless ceramic disc valve cartridges
Lever handles
Basin-mounted aerated spray nozzle and pop-up drain with tailpiece
ADA Compliant

BIDET FAUCET


999L



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1
IAPMO/cUPC
IPC
ADA & ICC/ANSI A117.1
ASME A112.18.3 (Back Flow)
All applicable US Federal and State material regulations

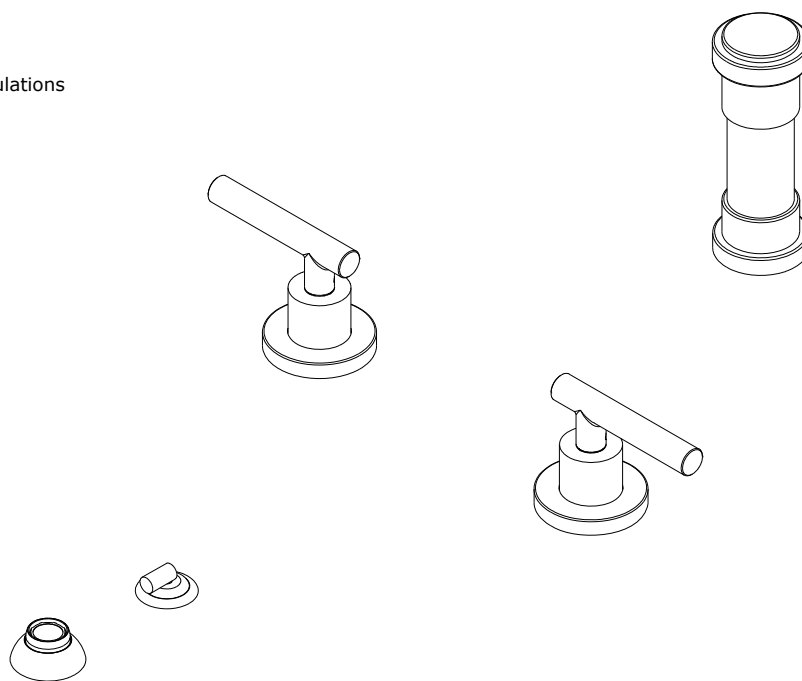

PRODUCT DIMENSIONS *(Units are in inches)*

Standard Deck Drain

- Top View: 2.99 [75,9] (Overall Diameter), .63 [15,9] (Flange Thickness), 1.00 [25,4] (Stem Diameter), 1.22 [310,4] (Total Height)
- Side View: 1.31 [33,3] (Flange Outer Diameter), 2.00 [50,8] (Amount of Stem Req. from Deck), 2.38 [60,3] (Stem Outer Diameter), 3.25 [82,6] (Stem Length), .56 [14,3] (Stem Inner Diameter)
- Bottom View: 2X 1/2 NPSM OUTLETS, 2X 1/2 NPSM INLETS

Flush Deck Drain

- Top View: 2.02 [51,3] (Overall Diameter), 2.00 [50,8] (Stem Diameter), 5.44 [138,3] (Total Height), MIN. 1.23 [31,2] (Flange Thickness), MAX. 1.75 [44,4] (Flange Thickness)
- Side View: 1.74 [44,1] (Flange Outer Diameter), 2X 3/8-19 BS (Bolt Pattern)
- Bottom View: 1.58 [40,1] (Flange Outer Diameter), .75 [19,1] (Flange Thickness), 1.62 [41,1] (Stem Length), .64 [16,2] (Stem Inner Diameter), 3/8-19 BS (Bolt Pattern)