

**NIBCO**

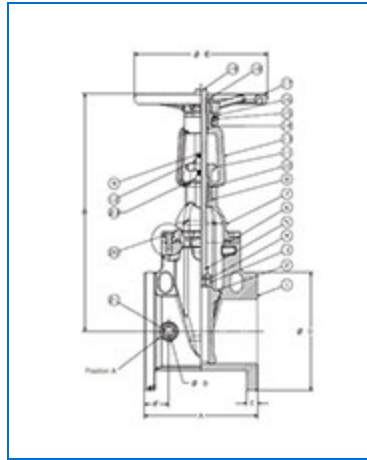
1516 Middlebury Street
Elkhart, IN 46516-4740

Phone: 574.295.3000 • **Fax:** 800.234.0557

E-Mail: info@nibco.com • **Web site:** www.nibco.com

Material Number NS2920XF, F-607-RWS - Gate Valve - Ductile Iron, Fire Protection, Resilient Wedge

The resilient wedge, ductile iron gate valve features Class 125 flanged, flat face end connections for easy installation and accessibility. Outside screw and yoke (OS&Y) gate valves are recommended when positive shutoff and a quick visual indicator of open/closed position is required. This valve features a pre-grooved stem for tamper switch mounting and is drilled, tapped, and plugged at location "A" for bypass. It is listed by Underwriters Laboratories of the US and Canada (UL/ULC) and FM

[+ more](#)


[Specifications](#) | [Materials](#)

Specifications	
UPC Code	039923366153
Type	Gate Valve
Valve Size	3
Connection Type	F -- Flanged
Valve Operator	Standard Handwheel
Description	F-607-RWS 3 FL OSYRW SSSTM ULFMGT DI300
Turns/Operation	Multi-Turn
Weight	44.090 lb

Materials	
Valve Body Material	Ductile Iron

Stem Material	Stainless Steel 304
---------------	---------------------