



Professional Catalog

Tankless...Endless Comfort



Amazing Performance

World's Most Advanced Tankless Technology

With a Noritz tankless water heater you will get endless hot water. Tankless water heaters heat water on demand, and that means you never have to worry about running out of hot water. Imagine the luxury of always having enough hot water to enjoy a relaxing shower or fill a hot tub and still have an endless supply of hot water for the rest of your household needs.

Sustained Strength

Noritz has topped worldwide tankless sales year after year over other tankless companies. This continuous growth is due to Noritz's commitment to developing tankless technology.

Continued Growth

Noritz has been developing and manufacturing the finest gas operated water heating products in the world since 1951 and is the number one manufacturer in the world for tankless technology. Increased environmental awareness, with the conservation of energy and space worldwide, has encouraged Noritz to expand globally.



Condensing Technology



Noritz: Engineered To Extremely High Standards of Durability & Reliability

PVC Adapter

Because the exhaust gas temperature is reduced significantly with our condensing units, less expensive PVC can be used for venting.

Built-in Neutralizer

Only Noritz offers condensing units with a neutralizer built-in to neutralize the acidic condensate, making it safe to drain through your drainage system.

Pressure Loss

Noritz tankless water heaters are designed to minimize pressure loss, while maintaining optimum temperature control, for the most comfortable experience.

Stainless Steel Secondary Heat Exchanger

100% Stainless Steel. Built entirely of stainless steel materials, our secondary heat exchanger resists corrosion and is built to last.



100% Stainless Steel

Tankless is Green

Noritz residential models meet or exceed the criteria set forth for **ENERGY STAR** qualification. With **ENERGY STAR** certification, you can rest with confidence a Noritz tankless will save energy and money.



On Demand

Tankless water heaters heat water only when needed, eliminating the wasteful energy use of reheating stored hot water, which is standard with tank-type water heaters.

Save Energy. Save Money.

With a Noritz tankless water heater, you'll save energy and thus, money. Our on-demand systems require no standing pilot light and can save about half the cost of your current water heating bill since there is no re-heating of water as with traditional water heaters.

Table of Contents

02: Introduction

03: Residential Product Summary

04: Sizing reference & Residential Warranty Info

05: EcoTough Series - Highest Efficiency & PVC Vented

06: ProTough Series - Durability Engineered

07: ValueSolutions - Reliable & Affordable

08: Accessories

09: H2Flow & Hydronics Boiler

10-13: Noritz Commercial

14-15: DVC Venting

16: PVC Venting

17-19: SV & DV Venting

ecoTOUGH™
Super Efficient. Reliable.

proTOUGH™
Efficient. Reliable.

valueSOLUTIONS

Condensing	✓		
Commercial Grade Heat Exchanger	✓	✓	
Residential Heat Exchanger			✓
Quick- Connect	✓	✓	
Remote Controller	✓	✓	
New Front Cover Design	✓	✓	
12-yr Recirculation Warranty	✓	✓	
Basic Warranty			✓



Commercial Grade Copper Heat Exchanger

Our heat exchanger has 25% thicker piping to help prevent condensation and erosion, ensuring a longer life.


Durability

Research shows that a competitor's heat exchanger would last an estimated 7.6 years before a leak occurred. The tests for the Noritz Commercial grade heat exchanger on the other hand, indicate that it would last more than twice as long - **an estimated 18.4 years** - before a leak occurred.



**12-year/6,500 hours
Warranty in homes
with hot water
recirculation systems**

The heat exchanger is under warranty for 12 years (see warranty for conditions). Noritz will extend this same warranty up to a maximum of 6,500 operational hours if an aquastat, timer or other device is used to limit the use of recirculation during the day. We call this "controlled recirculation." See warranty for full details.

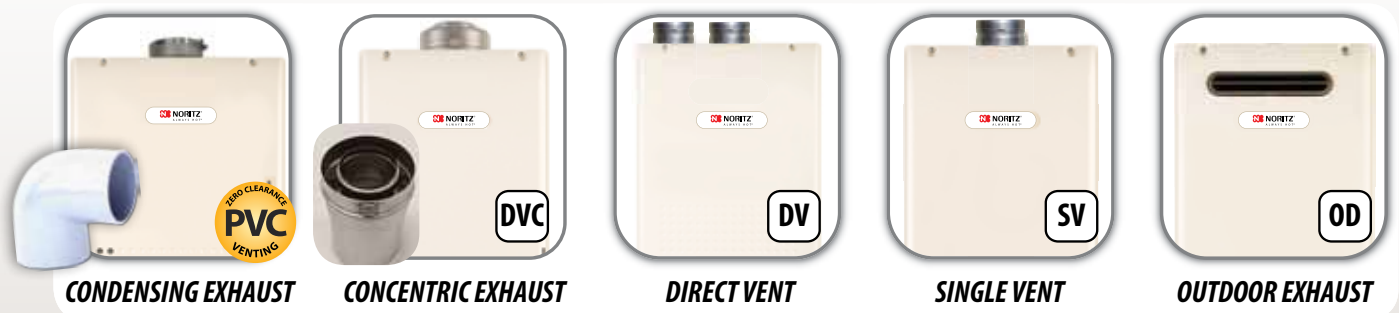

	INDOOR			OUTDOOR
Type	DVC	DV	SV	OD
Condensing PVC	Concentric Vent	Two pipes	Single pipe	Outdoor only, no vent required
Application	Basement, mechanical room where air is tight, etc (One termination)	Basement, mechanical room where air is tight, etc	Garage installation, Attic installation, etc.	Outdoor installations

Flow Rate

Sizing Reference

Temp Rise (°F)	(NC380) Series	NR111 (NC250) Series	NRC111 (NC199) Series	NRC98 NR98 (NC199) Series	NR83 Series	NR71 Series	NR66 Series	NR50 Series
30	13.2	11.1	11.1	9.8	8.3	7.1	6.6	5.0
35	13.2	11.1	10.6	9.2	8.1	7.1	6.6	5.0
40	13.2	10.5	9.3	8.4	7.6	7.1	5.7	5.0
45	13.2	9.3	8.4	7.5	6.7	6.3	5.3	4.2
50	12.5	8.4	7.4	6.7	6.1	5.8	4.6	3.9
55	11.3	7.6	6.8	6.1	5.4	5.2	4.2	3.5
60	10.4	7.0	6.2	5.6	5.0	4.8	3.8	3.3
65	9.6	6.5	5.8	5.2	4.7	4.4	3.5	3.0
70	8.9	6.0	5.3	4.8	4.3	4.1	3.3	2.8
75	8.3	5.6	5.0	4.5	4.1	3.8	3.1	2.6
80	7.8	5.3	4.6	4.2	3.8	3.6	2.9	2.5
85	7.3	4.9	4.4	4.0	3.6	3.4	2.7	2.3
90	6.9	4.7	4.1	3.7	3.4	3.2	2.6	2.2
95	6.6	4.4	3.9	3.5	3.2	3.0	2.4	2.1
100	6.2	4.2	3.7	3.4	3.0	2.9	2.3	2.0

(For peak flow rates in shaded areas, contact Noritz for proper setting.)


Model	Summer Water Supply 70°F		Winter Water Supply 45°F	
(NC380)	5.3 Showers	 13.2 GPM	4.2 Showers	 10.4 GPM
NR111 (NC250)	4.4 Showers	 11.1 GPM	2.8 Showers	 7.0 GPM
NRC111 (NCC199)	4.1 Showers	 10.6 GPM	2.5 Showers	 6.2 GPM
NRC98/NR98 (NC199)	3.7 Showers	 9.2 GPM	2.2 Showers	 5.6 GPM
NR83	3.3 Showers	 8.3 GPM	2.0 Showers	 5.0 GPM
NR71	2.8 Showers	 7.1 GPM	1.9 Showers	 4.8 GPM
NR66	2.6 Showers	 6.6 GPM	1.5 Showers	 3.8 GPM
NR50	2.5 Showers	 5.0 GPM	N/A for Winter Weather	

(Model numbers in parenthesis are commercial models. Assuming a standard 2.5 GPM shower head and 105°F output water temperature.)

Space Saving Calculation


A traditional tank-type water heater takes up to 13 ft² of space. If 1 ft² is worth \$200, that's \$2,600 (13 ft² X \$200) worth of space you could be saving at Noritz.

* Installation must conform with local codes, or in the absence of local codes, the National Fuel Gas Code, ANSI Z223.1/NFPA 54.

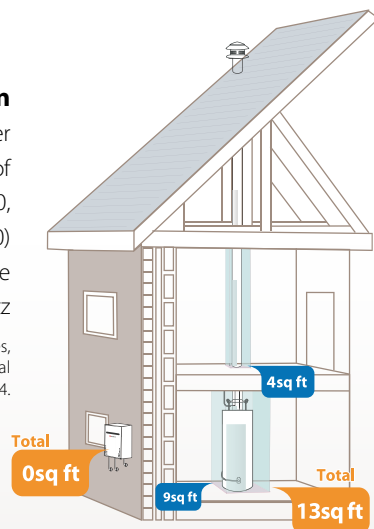

Flexible & Space Saving Installation

With the compact size and broad selection, Noritz tankless water heaters can be installed virtually anywhere. Indoor or outdoor, Noritz has the unit, venting and accessories needed for the job.

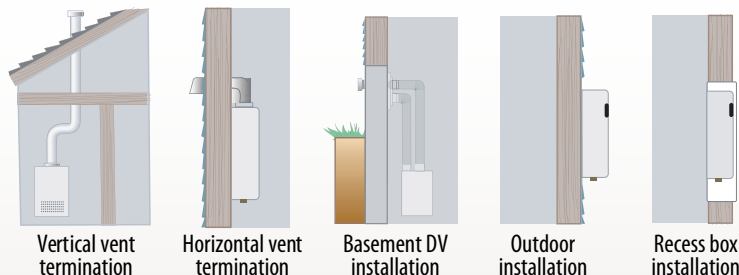

Warranty Info


12 year Heat Exchanger **5 year** Warranty on Parts **1 year** Reasonable Labor

Basic Warranty

Noritz offers a 12-year residential warranty on the heat exchanger, a 5-year warranty on parts and 1-year reasonable labor. (Labor will be paid to an authorized Noritz Service Rep. on pre-approved warranty repairs.) The residential warranty on the heat exchanger is reduced to 3 years for the NR66 & NR71 Series if the product is supplied with circulated water. All residential series units supplied with pre-heated water will have warranty coverage on the heat exchanger for 3 years.


Federal Tax Credit

Noritz water heaters that meet ENERGY STAR qualifications are eligible for a federal tax credit of \$300. In addition to the federal tax credit, many local utility companies are recognizing the benefits of tankless water heaters and are encouraging this through rebates. Check with your installer, local utility company or www.noritz.com/homeowners for available rebates.



PVC Vented Heaters

ecoTOUGH™
Super Efficient. Reliable.

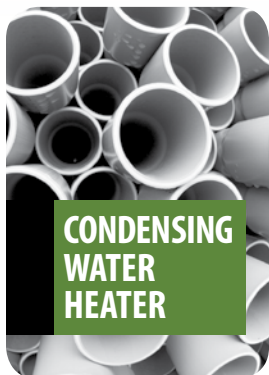

Specifications

NRC111 SERIES

High Efficiency
Up to 11.1 Gal./ min.
Indoor & Outdoor Install



NRC98 SERIES

High Efficiency
Up to 9.8 Gal./ min.
Indoor & Outdoor Install



NRC83 SERIES

High Efficiency
Up to 8.3 Gal./ min.
Indoor & Outdoor Install



Gas Consumption (Natural Gas/Propane)	SV: 199,900 - 11,000 BTUH DV: 199,900 - 11,000 BTUH	DV: 180,000 - 16,000 BTUH OD: 180,000 - 16,000 BTUH	DV: 157,000 - 16,000 BTUH OD: 157,000 - 16,000 BTUH
Gas Supply Pressure	SV: NG: 4.0" - 10.5" LP: 8.0" - 14.0" DV: NG: 4.0" - 10.5" LP: 8.0" - 14.0"	DV: NG: 4.0" - 10.5" LP: 8.0" - 14.0" OD: NG: 4.0" - 10.5" LP: 8.0" - 14.0"	DV: NG: 4.0" - 10.5" LP: 8.0" - 14.0" OD: NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Energy Factor	SV: 0.91 (NG), 0.93 (LP) DV: 0.92 (NG), 0.94 (LP)	DV: 0.92 (NG), 0.94 (LP)	N/A
Thermal Efficiency	SV: 93%, DV: 93.3% (NG), 93.9% (LP)	DV: 93%	N/A
Max Hot Water Capacity	45° F Rise: 8.4 Gal./min.	45° F Rise: 7.5 Gal./min.	N/A
Capacity Range	0.5-11.1 Gal./min.	0.5-9.8 Gal./min.	0.5-8.3 Gal./min.
Installation	SV: Indoor/Outdoor, Wall Mounted DV: Indoor, Wall Mounted	DV: Indoor, Wall Mounted OD: Outdoor, Wall Mounted	DV: Indoor, Wall Mounted OD: Outdoor, Wall Mounted
Air Supply/ Exhaust	SV: Power Vented, 4" Flue DV: Direct Vent, 4" Intake & Exhaust	Power Vented, 3" or 4" Flue	Power Vented, 3" or 4" Flue
Ignition	Direct Ignition	Direct Ignition	Direct Ignition
Operating Pressure	15-150 psi	15-150 psi	15-150 psi
Minimum Flow Rate	0.5 GPM	0.5 GPM	0.5 GPM
Dimension	SV: 24.2" (H) x 18.3" (W) x 9.4" (D) DV: 24.2" (H) x 18.3" (W) x 9.4" (D)	DV: 24.2" (H) x 18.3" (W) x 9.4" (D) OD: 24.2" (H) x 18.3" (W) x 9.4" (D)	DV: 24.2" (H) x 18.3" (W) x 9.4" (D) OD: 24.2" (H) x 18.3" (W) x 9.4" (D)
Weight	SV: 74 (pounds) DV: 74 (pounds)	DV: 58 (pounds) OD: 57 (pounds)	DV: 58 (pounds) OD: 57 (pounds)
Water Holding Capacity	0.5 GPM	0.5 GPM	0.5 GPM
Water Inlet	NPT 3/4"	3/4"	3/4"
Hot Water Outlet	NPT 3/4"	3/4"	3/4"
Gas Inlet	NPT 3/4"	3/4", Condensate Drain: 1/2" Threaded	3/4", Condensate Drain: 1/2" Threaded
Supply	120 VAC (60 Hz)	120 VAC (60 Hz)	120 VAC (60 Hz)
Consumption	SV: NG: 106W LP: 109W DV: NG: 115W LP: 120W	DV: NG: 68W LP: 71W Freeze Prevention 213W OD: NG: N/A LP: N/A Freeze Prevention 203W	DV: NG: 54W LP: 56W Freeze Prevention 213W OD: NG: 51W LP: 54W Freeze Prevention 203W
Temperature Settings	100-150° F (in 5° F intervals), 160, 170, 180° F (in 10° F intervals) (14 options)	100-140° F (in 5° F intervals) (9 options)	100-140° F (in 5° F intervals) (9 options)
Default Temperature Options	120, 130, 140, 180° F (Original is 120° F)	120, 130, 140° F (Original is 120° F)	120, 130, 140° F (Original is 120° F)
Included Accessories	SV: Remote Controller & Cord, Anchoring Screws, Power Cord DV: Remote Controller & Cord, Anchoring Screws	Remote Controller & Cord, Anchoring Screws	Remote Controller & Cord, Anchoring Screws



Specifications

NR111 SERIES

Up to 11.1 Gal./ min.
Indoor & Outdoor Install



NR98 SERIES

Up to 9.8 Gal./ min.
Indoor & Outdoor Install




NR83 SERIES

Up to 8.3 Gal./ min.
Indoor Install



Gas Consumption (Natural Gas/Propane)	SV: 250,000 - 11,000 BTUH OD: 250,000 - 11,000 BTUH DV: 250,000 - 11,000 BTUH	SV: 199,900 - 12,000 BTUH OD: 199,900 - 12,000 BTUH DVC: 199,900 - 11,000 BTUH	180,000 - 18,000 BTUH
Gas Supply Pressure	SV: NG: 5.0" - 10.5" LP: 10.5" - 14.0" OD: NG: 5.0" - 10.5" LP: 10.5" - 14.0" DV: NG: 5.0" - 10.5" LP: 10.5" - 14.0"	SV: NG: 4.0" - 10.5" LP: 8.0" - 14.0" OD: NG: 4.0" - 10.5" LP: 8.0" - 14.0" DVC: NG: 4.0" - 10.5" LP: 8.0" - 14.0"	DVC: NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Energy Factor	n/a	SV: 0.83 (NG), 0.83 (LP) OD: 0.82 (NG), 0.86 (LP) DVC: 0.82 (NG), 0.84 (LP)	DVC: 0.82 (NG), 0.83 (LP)
Thermal Efficiency	84%	84%	85%
Max Hot Water Capacity	45°F Rise: 9.3 Gal./min.	45°F Rise: 7.5 Gal./min.	45°F Rise: 6.7 Gal./min.
Capacity Range	0.5-11.1 Gal./min.	0.5-9.8 Gal./min.	0.5-8.3 Gal./min.
Installation	SV: Indoor/Outdoor, Wall Mounted OD: Outdoor, Wall Mounted DV: Indoor, Wall Mounted	SV: Indoor/Outdoor, Wall Mounted OD: Outdoor, Wall Mounted DVC: Indoor, Wall Mounted	Indoor, Wall Mounted
Air Supply/ Exhaust	SV: Power Vented, 4" Flue OD: Power Venting, No Venting DV: Direct Vent, 4" Intake & Exhaust	SV: Power Vented, 4" Flue OD: Power Vented, No Venting DVC: Power Vented, 3" x 5" Concentric Venting	Power Vented, 3" x 5" Concentric Venting
Ignition	Direct Ignition	Direct Ignition	Direct Ignition
Operating Pressure	15-150 psi	15-150 psi	15-150 psi
Minimum Flow Rate	0.5 GPM	0.5 GPM	0.5 GPM
Dimension	SV: 24.2" (H) x 18.3" (W) x 9.4" (D) OD: 24.2" (H) x 18.3" (W) x 9.4" (D) DV: 24.2" (H) x 18.3" (W) x 9.4" (D)	SV: 23.6" (H) x 13.8" (W) x 9.4" (D) OD: 23.6" (H) x 13.8" (W) x 9.4" (D) DVC: 23.6" (H) x 13.8" (W) x 10.2" (D)	23.6" (H) x 13.8" (W) x 9.4" (D)
Weight	SV: 62 (pounds) OD: 62 (pounds) DV: 62 (pounds)	SV: 47 (pounds) OD: 47 (pounds) DVC: 55 (pounds)	49 (pounds)
Water Holding Capacity	0.3 GPM	0.2 GPM	0.2 GPM
Water Inlet	3/4"	3/4"	3/4"
Hot Water Outlet	3/4"	3/4"	3/4"
Gas Inlet	3/4"	3/4"	3/4"
Supply	120 VAC (60 Hz)	120 VAC (60 Hz)	120 VAC (60 Hz)
Consumption	SV: NG: 115W LP: 115W OD: NG: 90W LP: 95W DV: NG: 115W LP: 120W	SV: NG: 62W LP: 75W OD: NG: 64W LP: 77W DVC: NG: 108W LP: 96W	NG: 82 LP: 90W
Temperature Settings	100-150°F (in 5°F intervals), 160, 170, 180°F (in 10°F intervals) (14 options)	100-150°F (in 5°F intervals), 160, 170, 180°F (in 10°F intervals) (14 options)	100-140°F (in 5°F intervals), (9 options)
Default Temperature Options	120, 130, 140, 180°F (Original is 120°F)	120, 130, 140, 180°F (Original is 120°F)	120, 130, 140, 140°F (Original is 120°F)
Included Accessories	SV: Remote Controller & Cord, Anchoring Screws, Power Cord OD: Remote Controller & Cord, Anchoring Screws DV: Remote Controller & Cord, Anchoring Screws	SV: Remote Controller & Cord, Anchoring Screws, Power Cord OD: Remote Controller & Cord, Anchoring Screws DVC: Anchoring Screws	Anchoring Screws, Power Cord

valueSOLUTIONS



Specifications

NR71 SERIES

Up to 7.1 Gal./ min.
Indoor & Outdoor Install



NR66 SERIES

Up to 6.6 Gal./ min.
Indoor & Outdoor Install



NR50 SERIES

Up to 5.0 Gal./ min.
Outdoor Install



Gas Consumption (Natural Gas/Propane)	SV: 180,000 - 25,000 BTUH OD: 180,000 - 25,000 BTUH	SV: 140,000 - 20,000 BTUH OD: 140,000 - 20,000 BTUH	OD (NG): 120,000 - 19,000 BTUH OD (LP): 120,000 - 20,000 BTUH
Gas Supply Pressure	SV: NG: 4.0" - 10.5" LP: 8.0" - 14.0" OD: NG: 4.0" - 10.5" LP: 8.0" - 14.0"	SV: NG: 4.0" - 10.5" LP: 8.0" - 14.0" OD: NG: 4.0" - 10.5" LP: 8.0" - 14.0"	OD: NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Energy Factor	SV: 0.83(NG), 0.83 (LP) OD: 0.82 (NG), 0.83(LP)	SV: 0.82(NG), 0.84(LP) OD: 0.83(NG), 0.84(LP)	OD: 0.82(NG), 0.82(LP)
Thermal Efficiency	83%	83%	83%
Max Hot Water Capacity	45° F Rise: 6.3 Gal./min.	45° F Rise: 5.3 Gal./min.	45° F Rise: 4.2 Gal./min.
Capacity Range	0.5-7.1 Gal./min.	0.5-6.6 Gal./min.	0.5-5.0 Gal./min.
Installation	SV: Indoor/Outdoor, Wall Mounted OD: Outdoor, Wall Mounted	SV: Indoor/Outdoor, Wall Mounted OD: Outdoor, Wall Mounted	OD: Outdoor, Wall Mounted
Air Supply/ Exhaust	SV: Power Vented, 4" Flue OD: Power Venting, No Venting	SV: Power Vented, 3" Flue OD: Power Vented, No Venting	OD: Power Vented, No Venting
Ignition	Direct Ignition	Direct Ignition	Direct Ignition
Operating Pressure	15-150 psi	15-150 psi	15-150 psi
Minimum Flow Rate	0.5 GPM	0.5 GPM	0.5 GPM
Dimension	SV: 23.6" (H) x 13.8" (W) x 6.7" (D) OD: 23.6" (H) x 13.8" (W) x 6.7" (D)	SV: 20.5" (H) x 13.8" (W) x 6.7" (D) OD: 20.5" (H) x 13.8" (W) x 6.7" (D)	OD: 20.5" (H) x 13.8" (W) x 6.7" (D)
Weight	SV: 41 (pounds) OD: 41 (pounds)	SV: 36 (pounds) OD: 36 (pounds)	OD: 33 (pounds)
Water Holding Capacity	0.2 GPM	0.2 GPM	0.2 GPM
Water Inlet	3/4"	3/4"	3/4"
Hot Water Outlet	3/4"	3/4"	3/4"
Gas Inlet	3/4"	3/4"	1/2"
Supply	120 VAC (60 Hz)	120 VAC (60 Hz)	120 VAC (60 Hz)
Consumption	SV: NG: 59W LP: 66W OD: NG: 46W LP: 50W	SV: NG: 54W LP: 59W OD: NG: 51W LP: 52W	OD: NG: 36W LP: 39W
Temperature Settings	100-150° F (in 5° F intervals), 160° F (12 options)	100-150° F (in 5° F intervals), 160° F (12 options)	100-150° F (in 5° F intervals), 160° F (12 options)
Default Temperature Options	120, 130, 140° F (Original is 120° F)	120, 130, 140° F (Original is 120° F)	120, 130, 140° F (Original is 120° F)
Included Accessories	SV: Anchoring Screws, Power Cord OD: Anchoring Screws	SV: Anchoring Screws, Power Cord OD: Anchoring Screws	OD: Anchoring Screws Freeze Protection (optional)

Accessories



Remote Controller

Pipe Cover

Isolation Valves

Recess Box

ScaleShield

H₂FLOW

Outdoor Junction Box

Temp/ Pressure Gauge

Neutralizer

Accessories	Descriptions	Part Number	NR50 NR66		NR71		NR83 NR98			NRC98		NRC111 NCC199		NR111 NC250			NC199		NC380	NH	
			SV	OD	SV	OD	SV	DVC	OD	DV	OD	SV	DV	SV	DV	OD	DVC	OD	SV	150	199
Remote Controller	Remote Controller	RC-7649M RC-7650M (CAN)	✓	✓	✓	✓	✓*		✓*	✓*	✓*	✓*	✓*	✓*	✓*	✓*	✓*	✓*			
Remote Controller Cord	10' Length	RC-CORD10	✓	✓	✓	✓	✓*		✓*	✓*	✓*	✓*	✓*	✓*	✓*	✓*	✓*	✓*			
	26' Length	RC-CORD26	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
RC Outdoor Junction Box	RC-OJB	0700757	✓	✓	✓	✓	✓		✓	✓	✓	✓		✓		✓		✓			
Pipe Covers	Pipe Cover	PC-1S	✓	✓	✓	✓															
	Pipe Cover	PC-2S					✓		✓												
	Pipe Cover	PC-2S-GRY															✓				
	Pipe Cover	PC-3S								✓	✓	✓ NRC111	✓ NRC111	✓ NR111	✓ NR111	✓ NR111					
	Pipe Cover	PC-5S						✓													
	Pipe Cover	PC-5S-GRY															✓				
	Stainless Steel	PC-3S-SUS										✓ NCC199	✓ NCC199	✓ NC250	✓ NC250	✓ NC250					
	Stainless Steel	PC-4S-SUS																✓			
Quick-Connect Cable	2-units only	QC-1					✓	✓	✓			✓	✓	✓	✓	✓	✓	✓			
	2-units only	QC-2						✓		✓	✓										
System Controller	Up to 6 units	SC-201-6M										✓ NCC199	✓ NCC199	✓	✓	✓			✓		
	Up to 6 units	SC-201-6M-EXT-OD															✓				
	Up to 6 units	SC-201-6M-EXT-DVC															✓***				
	Up to 12 Units	SC-201-12M										✓ NCC199	✓ NCC199	✓	✓	✓			✓		
	Up to 24 Units	SC-201-24M										✓ NCC199	✓ NCC199	✓	✓	✓			✓		
Isolation Valves	Isolation Valves (Includes Pressure Relief Valve) For lead free isolation valves and adapters, add "—LF" to the part number	IK-WV-200-1-TH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
		IK-WV-200-1-SW	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
		IK-WV-300-1-TH																	✓	✓	✓
		IK-WV-300-1-SW																	✓	✓	✓
Recess Box	NR50-OD/NR66-OD	RB-500		✓																	
	NR71-OD	RB-600				✓															
	NR98-OD/NC199-OD	RB-700							✓								✓				
	NR111-OD	RB-900													✓						
ScaleShield	ScaleShield	SS-HB-1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓								
		SS-HB-2												✓	✓	✓	✓	✓	✓**		
ScaleShield Refill Cartridges	1 Each	HBC-1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓								
	1 Each	HBC-2												✓	✓	✓	✓	✓	✓**		
H ₂ FLOW	H2Flow	H2F	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓****	✓****	✓****	✓	✓	✓****	✓	✓
H ₂ FLOW Refill Cartridge	1 Each	H2F-C	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Temp/Pressure Gauge	(75 PSI, 320° F)	TPG1-30																	✓*	✓*	
Safety Relief Valve	Safety Relief Valve	HTGSRV-1																	✓*	✓*	
Neutralizer	Condensate Neutralizer	NC-1								✓	✓										
	Neutralizer Cartridge	SKD7466										✓*	✓*								
Freeze Protection Kit	Freeze Prot. Kit	SKG7772		✓ NR50																	

SV= Standard Vent, DV= Direct Vent, OD= Outdoor Model, DVC= Concentric Vent

* Included with heater purchase. ** Two units required. *** RC-Cords will need to be purchased. ****Please contact Noritz for commercial sizing.




NORITZ HYDRONIC BOILER

OUR WATER CONDITIONING SOLUTION:

- ✓ MAINTAINS ENERGY EFFICIENCY
- ✓ REDUCES MAINTENANCE
- ✓ REMOVES EXISTING SCALE

According to the United States Geological Survey, 89.3% of the US homes have hard water. Over 85% of Canada has a hard water problem.

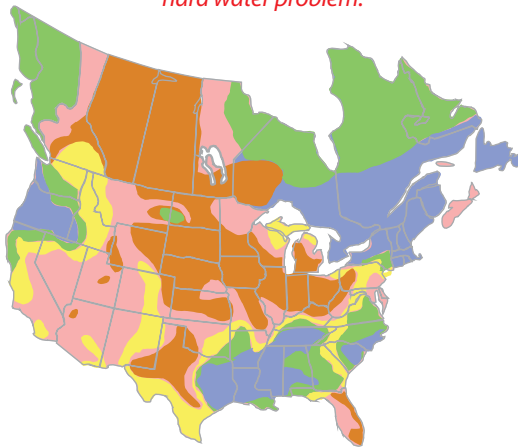


Water Supply Classifications	
less than 3 gpg	Slightly Hard
3 to 7 gpg	Moderately Hard
7 to 10 gpg	Hard
10 to 14 gpg	Very Hard
over 14 gpg	Extremely Hard
gpg = grains per gallons	

CONSEQUENCES OF HARD WATER: The harder the water, the more aggressive it is on appliances, especially water heaters. Water that is heated allows the dissolved minerals to come out of solution and deposit inside the water heater. Over time this scale reduces the performance as well as the longevity of a water heater.

H₂FLOW: Hard Water Solution

The Ultimate in Scale Protection

H₂FLOW is the answer to effectively handle hard water scale build up that can affect the performance of your appliance. This breakthrough technology has now been made available for all water heater types, including tankless, boilers, and tank type water heaters. H₂FLOW is an economical solution to hard scale build up that can help to protect your appliance for years to come.



Scale is an incrustation of calcium carbonate (CaCO₃) that forms on pipes and heating elements. The H₂FLOW uses TAC to attract hardness minerals that do not stick to pipes and components.

1st Asme Certified Tankless Hydronic Boilers For Residential & Commercial Applications.



Specifications

	NH199 SERIES	NH150 SERIES
	Flow range 17 - 4 gpm Indoor Install	Flow range 17 - 4 gpm Indoor Install
	DV	DV
Gas Consumption (Natural Gas/Propane)	199,900 - 55,500 BTUH	150,000 - 55,500 BTUH
Gas Supply Pressure	DV: NG: 4.0" - 10.5" LP: 8.0" - 14.0"	DV: NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Energy Factor	82.7%(NG), 83% (LP)	83%(NG), 82.8%(LP)
Thermal Efficiency	82.7%(NG), 83% (LP)	83%(NG), 82.8%(LP)
Ignition	Direct Ignition	Direct Ignition
Operating Pressure	15-30 psi	15-30 psi
Minimum Flow Rate	4 GPM	4 GPM
Dimension	24.2" (H) x 9.4" (W) x 10.0" (D)	24.2" (H) x 9.4" (W) x 10.0" (D)
Weight	63.5 (pounds)	63.5 (pounds)
Water Holding Capacity	0.4 GPM	0.4 GPM
Water Inlet	1"	1"
Hot Water Outlet	1"	1"
Gas Inlet	3/4"	3/4"
Supply	120 VAC (60 Hz)	120 VAC (60 Hz)
Consumption	NG: 97W LP: 111W	NG: 93W LP: 93W
Temperature Settings	140-180°F (in 5°F intervals)	140-180°F (in 5°F intervals)
Unit Type	Boiler - Indoor hanging wall -Direct Vent/ Sealed Combustion Closed Loop	Boiler - Indoor hanging wall -Direct Vent/ Sealed Combustion Closed Loop
Included Accessories	SV: Anchoring Screws, Power Cord OD: Anchoring Screws	SV: Anchoring Screws, Power Cord OD: Anchoring Screws

Advanced features include:

- Commercial-grade copper heat exchanger made thicker to help resist corrosion.
- Pipe with larger diameter specifically designed for the boiler dramatically reduces pressure loss through the multi-pass heat exchanger.
- Standard integrated priority controls for DHW and hydronic heating systems from a single controller on the front panel.
- Two temperature settings; 1 for the DHW and 1 for the heating system.
- High temperature capability (up to 180°F). Nine temperature option settings.
- Low maintenance – minimal moving parts (fan and flow switch only).
- Durable, fully solid state controls.

Warranty Info

10
year

Heat
Exchanger

1
year

Warranty
on Parts

Boiler Warranty

Noritz offers a 10-year warranty on the heat exchanger and a 1-year warranty on parts.

Commercial Advantage

**Modular
Multi-System
Modulation
Intelligent System**



Modular

The Noritz modular system is based on a single self-contained, interchangeable unit that can combine and communicate with like units to meet any hot water demand.

Multi-System


Noritz units can be linked together with a single system controller, up to 24 units. This allows outputs of 9.1 million Btu/h and 316 gallons per minute.

Modulation

Noritz fully modulating technology can track any hot water demand with pin point accuracy, only using the energy necessary to heat the water that is used.

Intelligent System

In a multi-system setup, the Noritz commercial units will communicate with one another and work in unison to even out the load on each individual unit, maximizing output and system life. With the ability to modulate between multiple units with the use of a system controller makes Noritz commercial water heaters the most efficient water heating system on the market today.

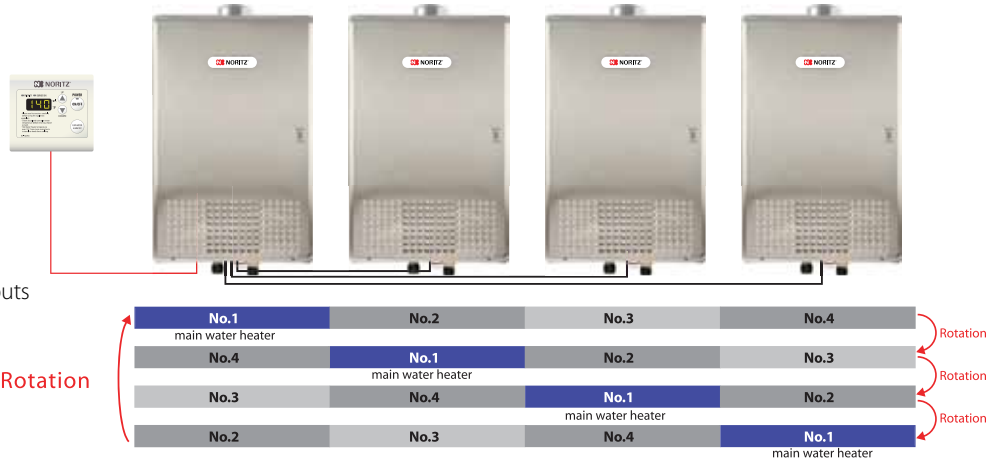

Fully Modulating Burner

Noritz's fully modulating burner technology is the most precise and efficient method of heating high fluctuating demands of water.

Single Unit


23:1 Turndown Ratio
11,000 - 250,000 BTU Range

24 Units (Modular)


545:1 Turndown Ratio
11,000 - 6 Million BTU Range

(Specs based on NC250 model)


Intelligent System

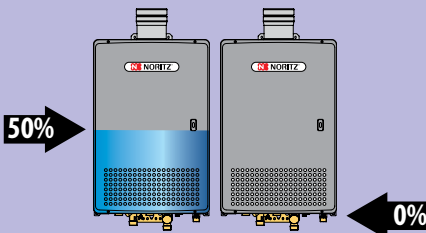


The heater will turn on when the flow is sensed.

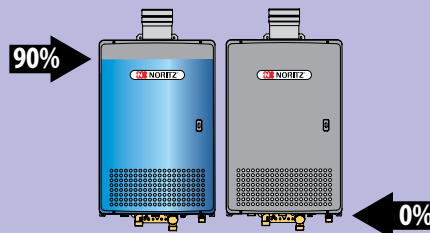

1 heater will work solely until the demand grows greater than 90%.

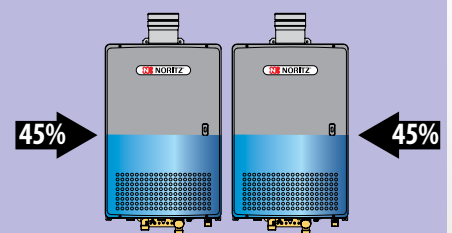

The load will equalize among 2 or more heaters to meet high volume demand.



Redundancy

Any one of the Noritz commercial units on a multi-system can be taken offline and serviced without compromising your business. Hot water will still be provided by the other units.



Efficiency

Because of the modulating technology, a Noritz commercial system heats water using only the energy necessary to meet the demand, reducing energy consumption significantly and saving on water heating costs.



Versatile Installation

Noritz commercial units can be installed indoor or outdoor and because of its size and weight, they can be wall hung or racked, making spaces once thought impossible, possible.

ADVANCED SOLUTIONS

Modular Concept

Noritz modular system can link up to 24 units. The system is based on a single self-contained, interchangeable unit that can combine and communicate with like units to meet any hot water demand.

Commercial H2Flow

- Designed for all water heater types and models regardless of manufacturer
- Prevents the formation of scale to improve efficiency and prolongs the life of the water heater
- Uses no salt or harmful chemicals and provides a more environmentally friendly alternative to water softeners
- 3/4", 1", 1-1/4", and 2" connections available for quick and easy installations and servicing
- Low Maintenance - replace the H2Flow media once every three years
- High-capacity units are also available for unlimited service flow rates when manifolded



Common Venting

Noritz offers common venting solutions for commercial installations. Our knowledgeable technical consultants are available at 866-766-7489.

Racking Systems

- Pre-fabricated racking system for commercial multisystem installations
- Can hold 2 Noritz tankless water heaters back to back and provides mounting holes for a quick and precise installation
- Provides a time and labor saving solution when installing multiple water heaters
- Manufactured with highly corrosion-resistant steel that can withstand extreme environments
- Perfect for flat rooftop or mechanical room applications



Warranty Info

5
year

**Heat
Exchanger**

5
year

**Warranty
on Parts**

Commercial Warranty

Noritz offers a 5-year warranty on the heat exchanger and a 5-year warranty on parts.

NC380- ASME SERIES

High Capacity
380,000 BTUH
Indoor & Outdoor Install



SV

NC250- ASME SERIES

High Capacity
250,000 BTUH
Indoor & Outdoor Install




SV

DV

NCC199 SERIES

High Efficiency
199,900 BTUH
Indoor & Outdoor Install

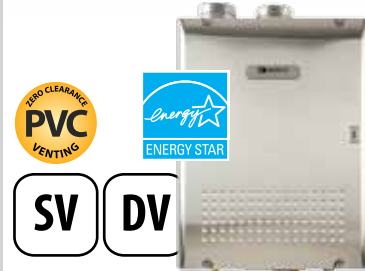

SV

DV

Specifications

Gas Consumption (Natural Gas/Propane)	380,000 - 22,500 BTUH	SV: 250,000 - 11,000 BTUH DV: 250,000 - 11,000 BTUH	SV: 199,900 - 11,000 BTUH DV: 199,900 - 11,000 BTUH
Gas Supply Pressure	SV: NG: 5.0" - 10.5" LP: 10.5" - 14.0"	SV: NG: 5.0" - 10.5" LP: 10.5" - 14.0" DV: NG: 5.0" - 10.5" LP: 10.5" - 14.0"	SV: NG: 4.0" - 10.5" LP: 8.0" - 14.0" DV: NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Energy Factor	n/a	n/a	SV: 0.91 (NG), 0.93 (LP) DV: 0.92 (NG), 0.94 (LP)
Thermal Efficiency	80% (NG), 84% (LP)	84%	SV: 93%, DV: 93.3% (NG), 93.9% (LP)
Max Hot Water Capacity	45° F Rise: 13.2 Gal./min.	45° F Rise: 9.3 Gal./min.	45° F Rise: 8.4 Gal./min.
Capacity Range	0.7 - 13.2 Gal./min.	0.5-11.1 Gal./min.	0.5-11.1 Gal./min.
Installation	Indoor/Outdoor, Wall Mounted	SV: Indoor/Outdoor, Wall Mounted DV: Indoor, Wall Mounted	SV: Indoor/Outdoor, Wall Mounted DV: Indoor, Wall Mounted
Air Supply/ Exhaust	Power Vented, 5" Flue	SV: Power Vented, 4" Flue DV: Direct Vent, 4" Intake & Exhaust	SV: Power Vented, 4" Flue DV: Direct Vent, 4" Intake & Exhaust
Ignition	Direct Ignition	Direct Ignition	Direct Ignition
Operating Pressure	15-150 psi	15-150 psi	15-150 psi
Minimum Flow Rate	0.7 GPM	0.5 GPM	0.5 GPM
Dimension	29.7" (H) x 19.1" (W) x 11.8" (D)	SV: 24.2" (H) x 18.3" (W) x 9.4" (D) DV: 24.4" (H) x 18.4" (W) x 9.4" (D)	SV: 24.4" (H) x 18.4" (W) x 9.4" (D) DV: 24.4" (H) x 18.4" (W) x 9.4" (D)
Weight	106 (pounds)	SV: 62 (pounds) DV: 62 (pounds)	SV: 73 (pounds) DV: 73 (pounds)
Water Holding Capacity	0.6 GPM	0.3 GPM	0.5 GPM
Water Inlet	1"	3/4"	NPT 3/4"
Hot Water Outlet	1"	3/4"	NPT 3/4"
Gas Inlet	1"	3/4"	NPT 3/4"
Supply	120 VAC (60 Hz)	120 VAC (60 Hz)	120 VAC (60 Hz)
Consumption	NG: 137W LP: 142W, Freeze Protect. 371W	SV: NG: 115W LP: 115W DV: NG: 115W LP: 120W	SV: NG: 106W LP: 109W DV: NG: 115W LP: 120W
Temperature Settings	100-150° F (in 5° F intervals), 160, 170, 180° F (in 10° F intervals) (14 options)	100-150° F (in 5° F intervals), 160, 170, 180° F (in 10° F intervals) (14 options)	100-150° F (in 5° F intervals), 160, 170, 180° F (in 10° F intervals) (14 options)
Default Temperature Options	120, 130, 140, 180° F (Original is 120° F)	120, 130, 140, 180° F (Original is 120° F)	120, 130, 140, 180° F (Original is 120° F)
Included Accessories	Remote Controller & Cord, Anchoring Screws	SV: Remote Controller & Cord, Anchoring Screws, Power Cord DV: Remote Controller & Cord, Anchoring Screws	SV: Remote Controller & Cord, Anchoring Screws DV: Remote Controller & Cord, Anchoring Screws

NC199 SERIES

Commercial Unit
199,900 BTUH
Indoor & Outdoor Install

**Specifications**

Gas Consumption (Natural Gas/Propane)	OD: 199,900 - 12,000 BTUH DVC: 199,900 - 11,000 BTUH
Gas Supply Pressure	OD: NG: 4.0" - 10.5" LP: 8.0" - 14.0" DVC: NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Energy Factor	OD: 0.82 (NG), 0.86 (LP) DVC: 0.82 (NG), 0.84 (LP)
Thermal Efficiency	84%
Max Hot Water Capacity	45°F Rise: 7.5 Gal./min.
Capacity Range	0.5-9.8 Gal./min.
Installation	OD: Outdoor, Wall Mounted DVC: Indoor, Wall Mounted
Air Supply/ Exhaust	OD: Power Vented, No Venting DVC: Power Vented 3" x 5" Concentric Venting
Ignition	Direct Ignition
Operating Pressure	15-150 psi
Minimum Flow Rate	0.5 GPM
Dimension	OD: 23.6" (H) x 13.8" (W) x 9.4" (D) DVC: 23.6" (H) x 13.8" (W) x 10.2" (D)
Weight	OD: 47 (pounds) DVC: 55 (pounds)
Water Holding Capacity	0.2 GPM
Water Inlet	3/4"
Hot Water Outlet	3/4"
Gas Inlet	3/4"
Supply	120 VAC (60 Hz)
Consumption	OD: NG: 64W LP: 77W DVC: NG: 108W LP: 96W
Temperature Settings	100-150°F (in 5°F intervals), 160, 170, 180°F (in 10°F intervals) (14 options)
Default Temperature Options	120, 130, 140, 180°F (Original is 120°F)
Included Accessories	OD: Remote Controller & Cord, Anchoring Screws DVC: Anchoring Screws

COMMERCIAL UNITS: ACCESSORIES

Accessories	Part Number	NC380	NC250		NCC199		NC199	
		SV	SV	DV	SV	DV	OD	DVC
Remote Controller	RC-7649	✓*	✓*	✓*	✓*	✓*	✓*	✓*
	RC-7650M (Can)	✓*	✓*	✓*	✓*	✓*	✓*	✓*
Remote Controller Cord	RC-CORD10	✓*	✓*	✓*	✓*	✓*	✓*	✓*
	RC-CORD26	✓	✓	✓	✓	✓	✓	✓
Remote Controller Outdoor Junction Box	0700757	✓	✓		✓		✓	
Pipe Cover	PC-2S-GRY						✓	
	PC-5S-GRY							✓
	PC-3S-SUS		✓	✓	✓	✓		
	PC-4S-SUS	✓						
Quick-Connect Remote Controller Cable	QC-1	✓	✓	✓	✓	✓	✓	✓
System Controller (For Multi-System)	SC-201-6M	✓	✓	✓	✓	✓		
	SC-201-6M-EXT-OD						✓	
	SC-201-6M-EXT-DVC							✓
	SC-201-12M	✓						
	SC-201-24M	✓						
Isolation Valve Kit For lead free isolation valves and adapters, add "-LF" to the part number	IK-WV-200-1-TH		✓	✓	✓	✓	✓	✓
	IK-WV-200-1-SW		✓	✓	✓	✓	✓	✓
	IK-WV-300-1-TH	✓						
	IK-WV-300-1-SW	✓						
Commercial H2FLOW Water Treatment	CH2F-**	✓	✓	✓	✓	✓	✓	✓
Commercial H2FLOW Replacement Media	CH2FC-**	✓	✓	✓	✓	✓	✓	✓
Neutralizer Kit	SKD7466				✓*	✓*		
Commercial Rack System (Hangs 2 units Tandem)	MR-2	✓	✓	✓	✓	✓	✓	✓

**MAX Gallons per minute capacity

Concentric Venting for DVC Models

DVC





Features:

- Push-on connection
- Single-wall penetration
- No need to cut - adjustable for easy installations
- Zero clearance to combustibles
- Use of superior anti-corrosion material 316L for outlet port
- Heat and chemical resistant flourine rubber O-ring for secure sealing


Horizontal Installation

Horizontal- Kits



Standard Wall Kit
Includes inner & outer plates
CVK-H



Wall Thickness Range
From 5.8"-13.2"



Thick Wall Kit
Includes inner & outer plates
CVK-H2

Wall Thickness Range
From 10.3"-17.8"

Horizontal- Build Your Own

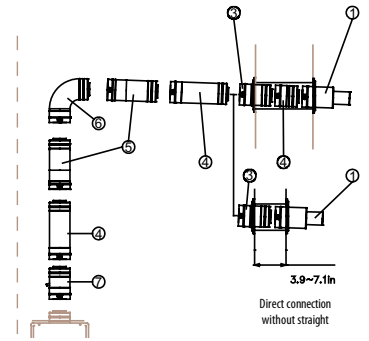


No	1	2	3	4	5	6	7
Description	Straight Bird Screen w/ Outer Plate	90° Adj w/ Wall Flange	Straight Vent Pipe w/ Wall Flange	Straight	Adjustable	45/ 90 Degree	Drain Tee
Part Number	CVT-S	CWF-90ELB	CWF	CVP-4/12/24/36STR	CVP-11/16/40ADJ	CVP-45/90ELB	CDT-V

Vertical Installation

Vertical Kit Cold Weather

• **CVK-V-CF**
(0-15 Degrees)

• **CVK-V-CA**
(15-45 Degrees)

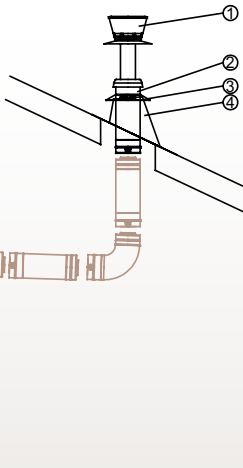

CVK-V-CF Contents

No	Description	Part Number
1	Rain Cap	CRC
2	Air Intake Pipe W/ Snap Connection	CAIP1
3	Storm Collar	CSCR
4	Flat Roof Flashing (0-15 Degrees)	CFRF
5	Drain Tee	CDT-V


CVK-V-CA Contents

No	Description	Part Number
1	Rain Cap	CRC
2	Air Intake Pipe W/ Snap Connection	CAIP1
3	Storm Collar	CSCR
4	Angled Roof Flashing (15-45 Degrees)	CARF
5	Drain Tee	CDT-V

Vertical Kit Warm Weather

• **CVK-V-F**
(0-15 Degrees)

• **CVK-V-A**
(15-45 Degrees)

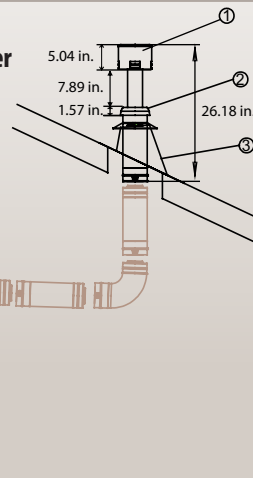

CVK-V-F Contents

No	Description	Part Number
1	Rain Cap w/ Air Intake Pipe	CRCAI
2	Storm Collar	CSCR
3	Flat Roof Flashing (0-15 Degrees)	CFRF


CVK-V-A Contents

No	Description	Part Number
1	Rain Cap w/ Air Intake Pipe	CRCAI
2	Storm Collar	CSCR
3	Angled Roof Flashing (15-45 Degrees)	CARF



Snorkel Kit

① Vertical*		② Wall Thickness*
a	b	c
23.91"~29.72"	27.41"~33.22"	16.45"~19.26"

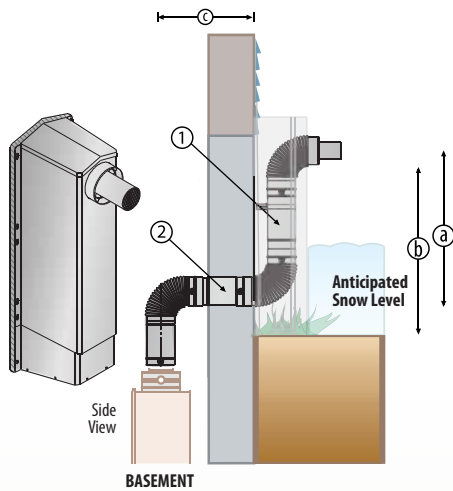

BASEMENT

*Additional vent pieces can be used to increase the vertical and wall thickness lengths.

Snorkel Kit (CVK-SNRK) Contents

PCS	Description	Part #
1	Snorkel case top	SNRK-C1
2	Snorkel case bottom	SNRK-C2
3	Concentric 11" adjustable vent pipe	CVP-11ADJ
4	Concentric 16" adjustable vent pipe	CVP-16ADJ
5	Concentric snorkel termination elbow	CVT-SNRK-90ELB
6	Concentric 90 degree elbow	CVP-90ELB
7	Concentric 90 degree adjustable elbow	CVP-90ADJELB
8	Adjustable support strap	SS5-3ADJ
9	Screw set	S-12



Cosmetic Ring

Description	Part #
5" Cosmetic Ring	CRS-SUS

Concentric Vent Pieces (Dia. 3" Inner / 5" Outer)


Type	Description	Part Number	Qty/Box	Dimensions		Drawing
				L1	L2	
Rigid	4" Straight	CVP-4STR	6	3.3"		
	12" Straight	CVP-12STR	6	11.8"		
	24" Straight	CVP-24STR	6	23.6"		
	36" Straight	CVP-36STR	6	35.4"		
Adjustable	11" Adjustable	CVP-11ADJ	6	8.3" - 11.2"		
	16" Adjustable	CVP-16ADJ	6	11.0" - 16.7"		
	40" Adjustable	CVP-40ADJ	6	22.8" - 40.6"		
Elbow	45° Elbow	CVP-45ELB	6	5.3"	2.2"	
	90° Elbow	CVP-90ELB	6	8.1"	4.9"	
	90° Adj. Elbow	CVP-90ADJELB	6	12.6" - 15.8"	4.9"	
Inner Wall Pieces	Straight w/Wall Flange	CWF	6	8.7"	8.7"	
	90° Adj. Elbow w/ Wall Flange	CWF-90ELB	6	12.6" - 15.8"	8.7"	
Drain Tee	Vertical Drain Tee	CDT-V	6	0.47"	8.3"	
Roof Pieces	Angled Roof Flashing (15°-45° Pitch)	CARF	1	19.3"	10.5"	
	Flat Roof Flashing (0°-15° Pitch)	CFRF	1	19.3"	10.5"	
	Storm Collar Ring	CSCR	1	1.2"	9.1"	
Terminations	(Cold Weather) Rain Cap	CRC	1	10.6"	19.9"	
	Air Intake Pipe for (Cold Weather) Rain Cap	CAIP1	1	16.5"	2"	
	Air Intake Pipe w/ (Warm Weather) Rain Cap	CRCAI	1	26.2"	13.3"	
	Straight Bird Screen	CVT-S	6	11.0"	3.9"	
	Face Plate	FP-S-OUT	1	6.7"	8.7"	
	Bug Guard for Horizontal Terminations	BG-DVC-H	1	Extendable	5"	
Others	Bug Guard for Vertical Terminations	BG-DVC-V	1	Extendable	5"	
	Support Strap (1" Clearance)	SS5-1	5 Sets	6.8"	1"	
	Support Strap (2" Clearance)	SS5-2	5 Sets	7.8"	2"	
	Support Strap (4" Clearance)	SS5-4	5 Sets	9.8"	4"	
	Support Strap (6" Clearance)	SS5-6	5 Sets	11.8"	6"	

Note: The DVC water heater and vent pipe are considered one system and have approved as such. The DVC-Vent Line is approved for use on Noritz product only.

PVC Venting for Condensing Models



New Plastic Vent Termination

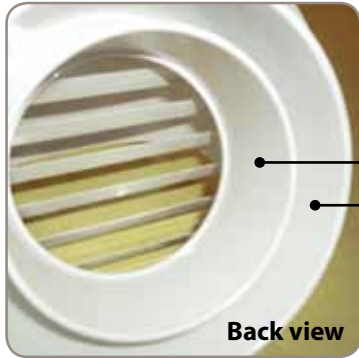

Back view



- For 3" PVC & CPVC
- For 4" PVC & CPVC

Plastic Vent Termination

- 3" and 4" in one design
- Hood / Louver Convertible
- Fits Schedule 40 PVC & CPVC
- Direct connection to PVC pipe

PART# PVT-HL

*not approved in Canada

Professional Finish: 2 in 1 Design

Removable Hood




Louver



3" PVC Concentric Horizontal Termination Kit

PART # VK3-H-PVC Specifications & Features:

- 3" Diameter for intake/exhaust
- 4.5" Diameter for termination
- Easy Installation

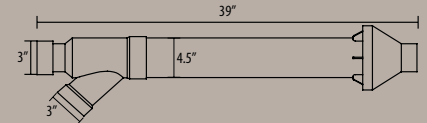

(Condensing DV units only)

NRC98 and NRC80 Series

COMING SOON! Accepts 3" or 4" PVC Sizes.



Vent Flue

- 3" Diameter
- 4" Diameter

- 3" and 4" socket sizes in one design.
- Fits Schedule 40 & 80.
- Direct connection to PVC Pipe - no need for a coupling.

Bird Screen Images



Side



Front



Cosmetic Ring

Others

Description	Part #
Outdoor Vent Cap	VC-4C
3" PVC Bird Screen	VT3-PVCS
4" PVC Bird Screen	VT4-PVCS
3" PVC Cosmetic Ring	CR3-PVC
4" PVC Cosmetic Ring	CR4-PVC



Vent Cap

NRC111 Series

- PVC Pipe*
- PVC Coupling* (SCH. 40)
- Built-in 4" PVC Adapter




**Direct
PVC
Connection!**

*These are not included

NCC199 Series

COMMERCIAL

PVC Adapter Required



NORITZ



3" PVC Adapter



4" PVC Adapter

NCC199 Series is designed to use PVC or Stainless Steel for venting.

Description	Part #
3" PVC Adapter	VP4X3-ADAPT-PVC
4" PVC Adapter	VP4-ADAPT-PVC
DV Short Termination Adapter	VT4-TS-ADAPT

Follow all vent system requirements in accordance with relevant local or state regulation, or, in the absence of local or state code, the National Fuel Gas Code ANSI Z233.1/NGPA 54- latest edition.

Stainless Steel Venting for SV and DV Models


SV

N-Vent Horizontal Vent Kit

VK4-H-*

Specifications & Features

- Stainless Steel
- 4" Diameter
- Flexibility for different wall thicknesses
- Easy installation
- Professional appearance

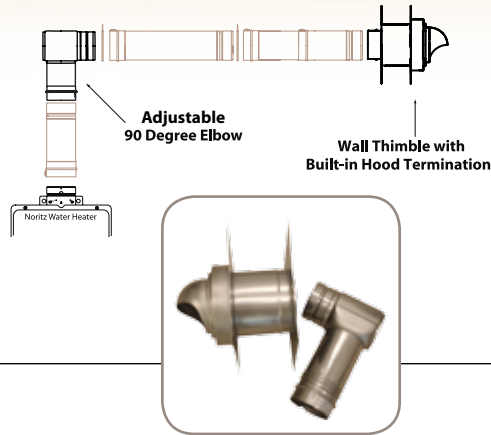

Part Number Based on Wall Thickness as Follows:

Wall Thickness	*Venting Kit Number
4.1" - 7.4"	VK4-H-8-1
7.4" - 14"	VK4-H-14-1

Horizontal Kit Contains:

Description	Part Number	Quantity
Wall Thimble with Built-in Hood Termination	WT4-H-#-1 (# Based on wall thickness)	1
Vertical Adjustment Range (7.5" - 11")	VP4-90ADJELB	1


SV

N-Vent Vertical Vent Kit

VK4-V1

Specifications & Features

- Stainless Steel
- 4" Diameter
- Easy installation
- Professional appearance

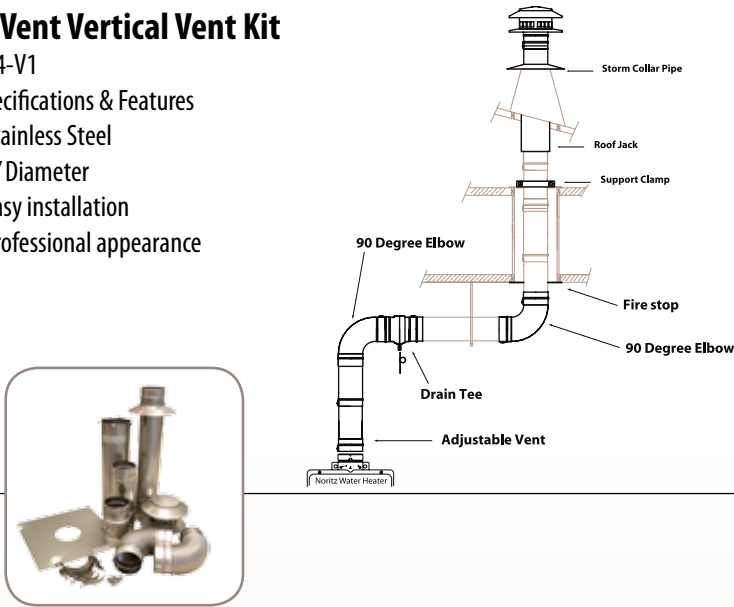

Vertical Kit Contains:


Description	Part Number	Quantity
Drain Tee	DT4	1
90 Degree Elbow	VP4-90ELB	2
Firestop	FS4	1
Support Clamp	SC4	1
Roof Jack	RJ4	1
Storm Collar Pipe	SCP4	1
Rain Cap	RC4	1
9" - 13.4" Adjustable Vent	VP4-13.4ADJ	1

DV

N-Vent Direct Vent Long Termination

Specifications & Features

- Stainless Steel
- 4" Diameter
- Easy installation
- Professional appearance

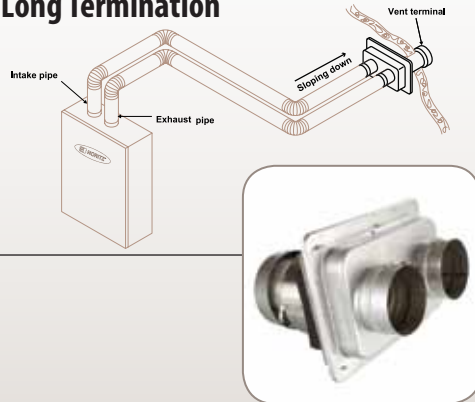

Use a listed Category III vent adaptor to connect the flue collar to the vent system. Use Category III vent pipe for the entire length of the exhaust pipe.

Part Name	Type	Wall Thickness	Dimensions (inches)		Part Number	Qty/ Box
Vent Termination	Long		Sleeve**	Termination** (L2)		
		3.5" - 5.1"	3.5" - 5.0"	7.0" - 8.5"	VT4-TL-5	1
		5.1" - 8.3"	5.0" - 8.0"	8.5" - 12.0"	VT4-TL-8	1
		8.3" - 14.6"	8.0" - 15.0"	12.0" - 18.0"	VT4-TL-14	1
		14.6" - 27.2"	15.0" - 27.0"	18.0" - 30.5"	VT4-TL-27	1


**Sleeve and termination (L2) can be adjusted in increments of 0.4 inch

DV

N-Vent Direct Vent Short Termination

Specifications & Features












- Stainless Steel
- 4" Diameter
- Easy installation
- Professional appearance

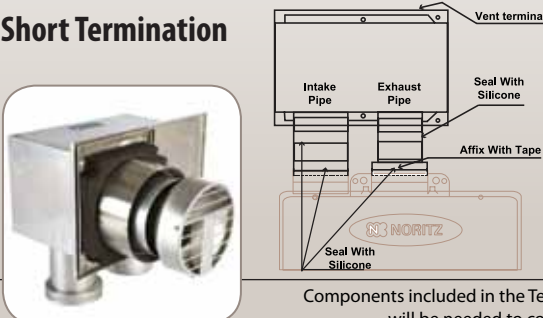

Part Name	Type	Wall Thickness	Dimensions (inches)		Part Number	Qty/ Box
Vent Termination	Long		Sleeve**	Termination** (L2)		
		3.5" - 5.1"	3.5" - 5.0"	7.0" - 8.5"	VT4-TS-5	1
		5.1" - 8.3"	5.0" - 8.0"	8.5" - 12.0"	VT4-TS-8	1
		8.3" - 14.6"	8.0" - 15.0"	12.0" - 18.0"	VT4-TS-14	1
		14.6" - 27.2"	15.0" - 27.0"	18.0" - 30.5"	VT4-TS-27	1

Components included in the Termination Kits are shown in bold and listed in the charts. Note: Additional venting components will be needed to complete most vent runs. **Sleeve and termination (L2) can be adjusted in increments of 0.4 inch

Stainless Steel Venting for SV and DV models

Type	Description	Dia.	Part Number	Qty/Box	Dimensions		Drawing		
					L1	L2			
Rigid	6" Straight	4"	VP4-6STR	6	2.1"	6.0"			
		5"	VP5-6STR	6	2.7"				
	12" Straight	3"	VP3-12STR	6	2.0"	12.0"			
		4"	VP4-12STR	6	2.1"				
	24" Straight	5"	VP5-12STR	6	2.7"	24.0"			
		3"	VP3-24STR	6	2.0"				
		4"	VP4-24STR	6	2.1"				
	36" Straight	5"	VP5-24STR	6	2.7"	36.0"			
		3"	VP3-36STR	6	2.0"				
		4"	VP4-36STR	6	2.1"				
	48" Straight	5"	VP5-36STR	6	2.7"	48.0"			
		3"	VP3-48STR	6	2.0"				
4"		VP4-48STR	6	2.1"					
18" Semi Flexible	5"	VP5-48STR	6	2.7"	6.2"				
	4"	VP4-18FLEX	6	2.1"					
Adjustable	9.4" Adjustable	5"	VP5-18FLEX	6	2.7"	6.8" - 9.1"			
		3"	VP3-9.4ADJ	6	2.0"				
		4"	VP4-9.4ADJ	6	2.1"				
	13.4" Adjustable	5"	VP5-9.4ADJ	6	2.7"	9.5" - 14.6"			
		3"	VP3-13.4ADJ	6	2.0"				
		4"	VP4-13.4ADJ	6	2.1"				
	21.4" Adjustable	5"	VP5-13.4ADJ	6	2.7"	15.4" - 26.5"			
		3"	VP3-21.4ADJ	6	2.0"				
		4"	VP4-21.4ADJ	6	2.1"				
	60" Adjustable	5"	VP5-21.4ADJ	6	2.7"	36.0" - 60.0"			
		3"	VP3-60.0ADJ	6	2.0"				
	4"	4"	VP4-60.0ADJ	6	2.1"				
Elbow		45° Elbow	5"	VP5-60.0ADJ	6	2.7"			
	3"		VP3-45ELB	6	2.0"	3.6"			
	4"		VP4-45ELB	6	2.1"				
	90° Elbow	5"	VP5-45ELB	6	2.7"			5.2"	
		3"	VP3-90ELB	6	2.0"	6.2"			
		4"	VP4-90ELB	6	2.1"				
Terminations	Straight Bird Screen	5"	VP5-90ELB	6	2.7"		7.9"		
		3"	VP3-90ELB	6	2.0"	5.9"			
		4"	VP4-90ELB	6	2.1"				
	45° Bird Screen	5"	VT5-S	6	2.7"		4.0"		
		4"	VT4-S45	6	2.1"				
	Hood	5"	VT5-S45	6	2.7"	5.5"			
		3"	VT3-SH	6	3.2"				6.1"
		4"	VT4-SH	6	7.4"				
	Louwer	5"	VT5-SH	6	7.4"	6.6"			
		4"	VT4-SL	6	7.4"				3.7"
	Rain Cap	5"	VT5-SL	6	7.4"	6.8"			
		4"	RC4	6	7.8"				
3"		RC3	6	6.3"					
Drain Tee	Horizontal Drain Tee	5"	RC5	6	11.0"	7.2"			
		4"	DT4	6	2.1"			7.2"	
		3"	DT3	6	2.0"				8.0"
	Vertical Drain Tee	5"	DT5	6	2.7"	5.1"			
		4"	DT4-V	6	2.1"			5.1"	
		3"	DT3-V	6	2.0"				
Roof Piece	Flat Roof Flashing	5"	DT5-V	6	2.7"	6.2"			
		4"	DT4	6	2.1"			4.0"	
	Angled Rood Flashing	5"	DT3	6	2.0"	18.0"			5.0"
		4"	ARF4	1	6.0"				
		3"	ARF3	1	5.0"			18.0"	
	Roof Jack	5"	ARF5	1	7.0"	6.0"			
		4"	RJ4	6	18.0"			4.0"	
		3"	RJ3	6					
	Storm Collar Pipe	5"	SCP5	1	2.7"	5.4"			
		4"	SCP4	1	2.1"				
	Storm Collar Ring	5"	CSCR	6	9.1"	1.2"			
		4"	SCR4	6	7.9"			4.0"	
3"		SCR3	6	7.8"					



Rigid



45° Elbow



45° Birdscreen



Hood Termination



Drain Tee



Rain Cap

Type	Description	Dia.	Part Number	Qty/Box	Dimensions		Drawing
					L1	L2	
Terminations	Wall Thimble	3"	WT3	1	6.0"	4.0"	
		4"	WT4	1	10.0"	7.0"	
		5"	WT5	1	12.2"	10.7"	
	Adjustable Wall Thimble w/ Built-In Termination	3"	WT3-H-6	1	6.5"	5.0" - 6.0"	
			WT3-H-9	1	6.5"	7.0" - 9.0"	
			WT3-H-14	1	6.5"	9.0" - 14.5"	
		4"	WT4-H-8-1	1	5.8"	4.1" - 7.8"	
			WT4-H-14-1	1	5.8"	7.8" - 14.0"	
			WT5-H-6	1	10.7"	6.0" - 8.0"	
	Short Direct Vent Termination	4"	VT4-TS-5	1		7.0" - 8.5"	
			VT4-TS-8	1		8.5" - 12.0"	
			VT4-TS-14	1		12.0" - 18.0"	
			VT4-TS-27	1		18.0" - 30.5"	
	Long Direct Vent Termination	4"	VT4-TL-5	1	2.0"	7.0" - 8.5"	
			VT4-TL-8	1	2.0"	8.5" - 12.0"	
			VT4-TL-14	1	2.0"	12.0" - 18.0"	
			VT4-TL-27	1	2.0"	18.0" - 30.5"	
	Direct Vent Termination Sleeve Cover	4"	FP-4	1	4.84"	7.84"	
Outdoor Venting	Vent Cap	3"	VC-3	6	7.9"	6.2"	
		4"	VC-4-1	6	7.9"	6.2"	
		5"	VC-132	1	18.9"	7.6"	
Others	Support Strap (1" Clearance)	3"	SS3-1	5 Sets	4.6"	4.0"	
		4"	SS4-1	5 Sets	5.7"	4.7"	
		5"	SS5-1	5 Sets	6.8"	6.0"	
	Support Strap (2" Clearance)	3"	SS3-2	5 Sets	5.6"	4.0"	
		4"	SS4-2	5 Sets	6.6"	4.7"	
		5"	SS5-2	5 Sets	7.8"	6.0"	
	Support Strap (3" Clearance)	3"	SS3-3	5 Sets	6.6"	4.0"	
	Support Strap (4" Clearance)	3"	SS3-4	5 Sets	7.6"	4.0"	
		4"	SS4-4	5 Sets	8.7"	4.7"	
		5"	SS5-4	5 Sets	9.8"	6.0"	
	Support Strap (6" Clearance)	4"	SS4-6	5 Sets	10.7"	4.7"	
		5"	SS5-6	5 Sets	11.8"	6.0"	
	Support Clamp	3"	SC3	5 Sets	6.0"		
		4"	SC4	5 Sets	6.0"		
		5"	SC5	5 Sets	7.0"		
	Fire Stop	3"	FS3	6	15.0"	3.4"	
		4"	FS4	6	18.0"	4.4"	
		5"	FS5	6	20.4"	5.4"	
	Cosmetic Ring	3"	CR3-SUS	1	6.9"	3.9"	
		4"	CR4-SUS	1	7.2"	4.3"	
		5"	CR5-SUS	1	9.9"	5.4"	



Wall Thimble



Wall Thimble w/
Built-In Termination



Vent Cap



Support Strap



Fire Stop



Headquarters

**11160 Grace Avenue
Fountain Valley, CA 92708
Phone: 714.433.2905 | Fax: 714.241.1514**

**www.noritz.com/pro
Toll Free: 888.382.6568**

Other Offices/Showrooms

Atlanta
1220 Kennestone Circle, Ste. 126
Marietta, GA 30066

Chicago
861 Busse Road
Elk Grove Village, IL 60007

Dallas
720 Industrial Boulevard, Ste. 200
Grapevine, TX 76051

New York
12 Skyline Drive
Hawthorne, NY 10532