


Bolt Close Conduit/Pipe Clamp



- Retained bolt and built-in nut means there are less parts to handle or drop
- Combo head bolt works with slotted, hex, #3 phillips or #2 robertson drivers

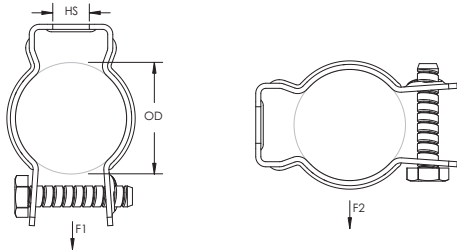

Part Number	Outer Diameter OD	EMT Conduit Size	Rigid Conduit/ Pipe Size	Hole Size HS	Static Load 1 F1	Static Load 2 F2	Certifications	Standard Packaging Quantity
Material: Steel – Finish: Electrogalvanized – Nut Type: Built-In Nut								
CD0B	0.670" – 0.840"	1/2"	1/2"	1/4"	200 lb	50 lb	cULus	100 pc
CD0B37	0.670" – 0.840"	1/2"	1/2"	3/8"	200 lb	50 lb	–	100 pc
CD1B	0.740" – 1.050"	3/4"	3/4"	1/4"	200 lb	50 lb	cULus, ITB	100 pc
CD1B37	0.740" – 1.050"	3/4"	3/4"	3/8"	200 lb	50 lb	–	100 pc
CD2B	1.000" – 1.315"	1"	1"	1/4"	200 lb	50 lb	cULus	100 pc
CD2B37	1.000" – 1.315"	1"	1"	3/8"	200 lb	50 lb	–	100 pc
CD2.5B	1.220" – 1.510"	1 1/4"	–	1/4"	200 lb	50 lb	cULus	100 pc
CD2.5B37	1.220" – 1.510"	1 1/4"	–	3/8"	200 lb	50 lb	–	100 pc
CD3B	1.410" – 1.740"	1 1/2"	1 1/4"	1/4"	200 lb	50 lb	cULus, ITB	100 pc
CD3B37	1.410" – 1.740"	1 1/2"	1 1/4"	3/8"	200 lb	50 lb	–	100 pc
CD4B	1.750" – 1.900"	–	1 1/2"	5/16"	200 lb	50 lb	cULus, ITB	50 pc
CD4B37	1.750" – 1.900"	–	1 1/2"	3/8"	200 lb	50 lb	–	50 pc
CD5B	1.910" – 2.875"	2"	2"	5/16"	200 lb	50 lb	cULus, ITB	50 pc
CD5B37	1.910" – 2.875"	2"	2"	3/8"	200 lb	50 lb	–	50 pc
Material: Steel – Finish: Electrogalvanized – Nut Type: Hex Nut								
CD6B	2.600" – 3.000"	2 1/2"	2 1/2"	5/16"	350 lb	50 lb	–	25 pc
CD7B	3.150" – 3.500"	3"	3"	5/16"	350 lb	50 lb	–	25 pc
CD8B	3.740" – 4.130"	3 1/2"	3 1/2"	5/16"	350 lb	50 lb	–	10 pc
CD9B	4.250" – 4.530"	4"	4"	5/16"	350 lb	50 lb	–	10 pc

Part Number	Outer Diameter OD	EMT Conduit Size	Rigid Conduit/ Pipe Size	Hole Size HS	Static Load 1 F1	Static Load 2 F2	Certifications	Standard Packaging Quantity
Material: Stainless Steel 304 [EN 1.4301] – Nut Type: Hex Nut								
CD0BSS	0.670" – 0.840"	1/2"	1/2"	1/4"	200 lb	50 lb	cULus	100 pc
CD1BSS	0.740" – 1.050"	3/4"	3/4"	1/4"	200 lb	50 lb	cULus	100 pc
CD2BSS	1.000" – 1.315"	1"	1"	1/4"	200 lb	50 lb	–	100 pc
CD2.5BSS	1.220" – 1.510"	1 1/4"	–	1/4"	200 lb	50 lb	cULus	100 pc
CD3BSS	1.410" – 1.740"	1 1/2"	1 1/4"	1/4"	200 lb	50 lb	cULus	100 pc
CD4BSS	1.750" – 1.900"	–	1 1/2"	5/16"	200 lb	50 lb	cULus	50 pc
CD5BSS	1.910" – 2.875"	2"	2"	5/16"	350 lb	50 lb	cULus	50 pc
CD6BSS	2.600" – 3.000"	2 1/2"	2 1/2"	5/16"	350 lb	50 lb	–	25 pc
CD7BSS	3.150" – 3.500"	3"	3"	5/16"	350 lb	50 lb	–	25 pc
CD8BSS	3.740" – 4.130"	3 1/2"	3 1/2"	5/16"	350 lb	50 lb	–	10 pc
CD9BSS	4.250" – 4.530"	4"	4"	5/16"	350 lb	50 lb	–	10 pc

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2021 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

