


nVent CADDY Slick Nut



- Provides fast universal attachment of threaded rod and hardware to standard strut profiles

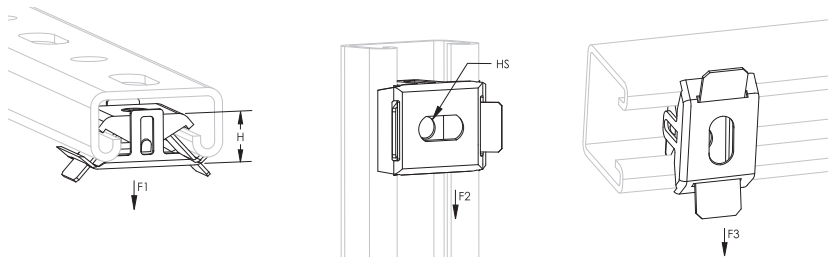

Material: Polyamide, Spring Steel

Finish: nVent CADDY Armour

Part Number	Hole Size HS	Hole Type	Height H	Torque TQ	Static Load 1 F1	Static Load 2 F2	Static Load 3 F3
SLICK250	1/4"	Threaded	11/16"	4 ft lb	400 lb	100 lb	250 lb
SLICK375	3/8"	Threaded	11/16"	10 ft lb	600 lb	100 lb	250 lb
SLICK500	1/2"	Threaded	11/16"	10 ft lb	600 lb	100 lb	250 lb

Indicated loads are independent of the threaded stud or rod.

Indicated loads are applicable on 14 GA and 12 GA (2 mm and 2.5 mm) strut channels only.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2021 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

