



NVENT CADDY SWIFT CLIP STRUT CLAMP FOR INSULATED TUBE/PIPE, 2 1/8" OD, 2" COPPER TUBE

CATALOG NUMBER

TSMI0212



FEATURES

Secures pipe and insulation without a break, providing an uninterrupted vapor barrier seal which eliminates sweating on metal fittings

Snap-in and twist installation requires no tools

Fits directly into vertical and horizontal strut channels

For support and positioning of refrigeration, A/C tubing, PEX piping, conduit and cabling

Compliant with UL® 2043 and suitable for use in air handling (plenum) spaces

PRODUCT ATTRIBUTES

Material: Polyamide

Working Temperature: -40 to 284 °F

Outer Diameter: 2 1/8"

Copper Tube Size: 2"


Width: 1 5/8"

ADDITIONAL PRODUCT DETAILS

Can also be used with PEX piping. For PEX pipe sizes, refer to the Copper Tube Size column.

Clip must be installed with temperature at or above 14 °F (-10 °C).

DIAGRAMS

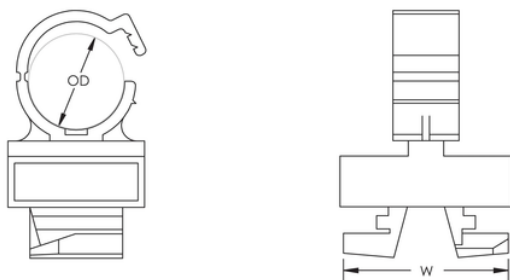

Part Number	Copper Tube with 3/8" Insulation	Copper Tube with 1/2" Insulation
TSMI0062	-	-
TSMI0075	-	-
TSMI0087	-	-
TSMI0100	1/4"	-
TSMI0112	3/8"	-
TSMI0125	1/2"	1/4"
TSMI0137	5/8"	3/8"
TSMI0150	7/8"	5/8"
TSMI0162	1 1/8"	3/4"
TSMI0200	-	7/8"
TSMI0212	1 3/8"	1 1/8"

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© 2022 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.