



Recessed Inlet®

Recessed Inlet®

FV-NLF46RES



- Includes (1) replaceable, 8W ENERGY STAR 2.0 certified, GU24 base LED lamp, JA-8 compliant for CA Title 24 and Title 20
- Multi-purpose exhaust or supply recessed inlet is ideal for use with remote mount in-line fans and H/ERVs
- Can be used as a light only option matching the WhisperRecessed LED fan with a dimmable LED light
- Incorporates an architectural grade recessed can light design
- Beautiful lighting with 6" aperture and advanced luminaire design

ADDITIONAL BENEFITS



- Can be used to comply with ASHRAE 62.2, LEED, CALGreen*, JA8 compliant for CA Title 24 & Title 20
- Can be used in conjunction with SelectCycler System® to create a wired, measurable balanced ventilation solution
- Can be used as a re-circulation filtration device in the home
- Can be used to create slight positive pressure within the home instead of using a Central HVAC
- Excellent fresh air solution in combination with ductless HVAC solutions
- Designed for use in conjunction with furnace blower in Combustion Appliance Zone (CAZ) depressurization situations
- Easy installation in new construction or retrofits

The Design Solution for Exhaust or Supply Inlets

Recessed Inlet



FV-NLF46RES

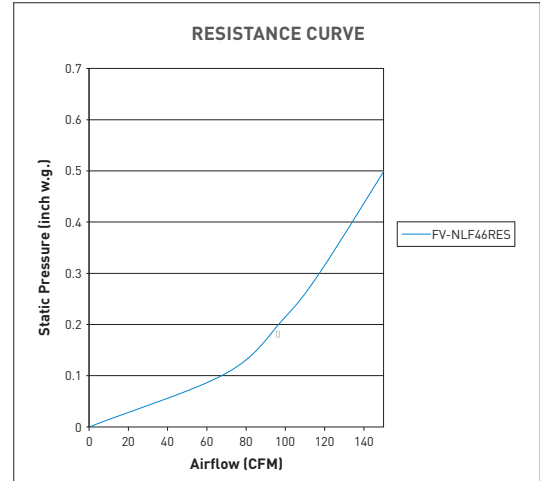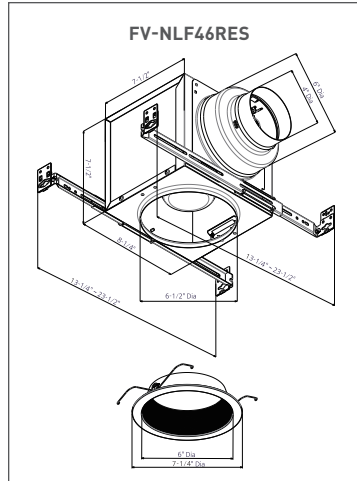

LED Lamp

(1) 8 Watt GU24 base LED lamp, /2700 Kelvin Warm White/>92CRI/720 lumens/90 LPW/ENERGY STAR 2.0 certified, JA-8 compliant for CA Title 24 and Title 20, 25,000 rated average life.

	Recessed Inlet	FV-NLF46RES	
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	N/A	N/A
	Air Volume (CFM)	N/A	N/A
	Noise (sones)	N/A	N/A
	Power Consumption (watts)	N/A	N/A
	Energy Efficiency (CFM/Watt)	N/A	N/A
	Speed (RPM)	N/A	N/A
	Current (amps)	N/A	N/A
	MAX. Current (amps)	N/A	
	Power Rating (V/Hz)	120/60	
	Motor Type	N/A	
Specifications	Type of Motor Bearing	N/A	
	Thermal Fuse Protection	N/A	
	Blower Wheel Type	N/A	
	ENERGY STAR Qualified	Yes*	
Installation	Duct Diameter (Inches)	4" or 6"	
	Housing Collar Opening (Inches)	6-1/2" Round	
	Trim Outer Diameter (Inches)	7-1/4" Round	
Light Specifications	Lamp Watts	1 x 8w	
	Lumens (lm)	750	
	Lumens Per Watt (LPW)	68	
	Color Rendering Index	92	
	Color Temperature (Kelvin)	2,700	
	Rated Life (hours)	25,000	
	Lamp Model # (Green Creative)	8BR30DIM927/GU24	
	Type of Lamp Socket	GU24	
Shipping	Gross Weight (lbs)	6.9	
Approved Code/Standard/Regulation	UL tub/Shower Enclosure	Yes	
	CALGreen	N/A	
	Washington VIAQ Code	N/A	
	California Title 24 Compliant	Yes	
	Mfg in ISO 9001 Certified Facility	Yes	

*Only for the Lamp



Panasonic IAQ Division

Two Riverfront Plaza
Newark, NJ 07102

na.panasonic.com/us/iaq

For Order Information

PHONE: 866-292-7299

FAX: 888-553-0723

ventfans@us.panasonic.com

IAQ22108SS