



SMART PLUMBING STARTS HERE!

CONCENTRIC VENT KITS

READY TO SHIP TODAY!

- PVC vents simplify installation
- Available in 2", 3" and 4" IPS intake sizes
- Simplifies the installation of high efficiency furnaces, insta-hot water heaters and boilers
- Requires only one hole to be cut rather than two
- Saves time and money during installation


PART #	DESCRIPTION
22152	2"
22153	3"
22154	4"

Now
Available!




Flexible Installation

Rooftop Installation

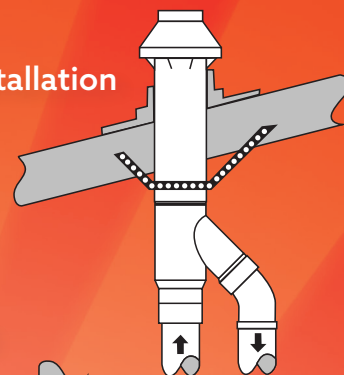

Exterior Wall Installation

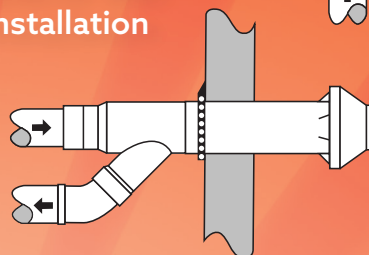

Manufactured by:

DAKOTA SOURCING, LLC

P.O. Box 1667 South Gate, CA 90280 • Phone (310) 537-7782 • Fax (800) 737-2726


7529 Perryman Court Curtis Bay, MD 21226 • Phone (410) 360-5010 • Fax (877) 377-6466

601 N. 16th St. Beresford, SD 57004 • Phone (605) 540-4370 • Fax (605) 412-4166

CONCENTRIC VENT KITS




Concentric Vent Kit Dimensions

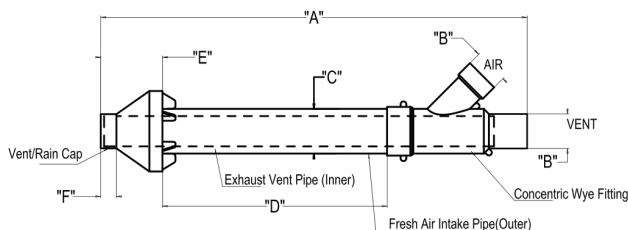


Part No.	A	B Nominal PVC Pipe Size	C	D	E	F
22152	33" (840mm)	2"	3.5" (89mm)	17.5" (445mm)	4.85" (123mm)	1.2" (30.5mm)
22153	39" (990mm)	3"	4.5" (114mm)	22" (559mm)	5.5" (140mm)	1.6" (41mm)
22154	57.25" (1455mm)	4"	5.5" (140mm)	39.25" (997mm)	8.1" (206mm)	4.35" (111mm)

NOTE: Read the entire instruction manual before starting the installation.

Typical Roof Install

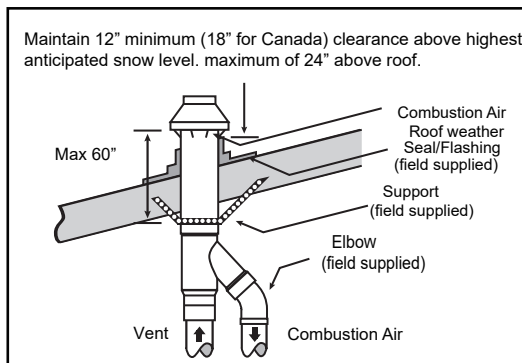

Sidewall Termination Details

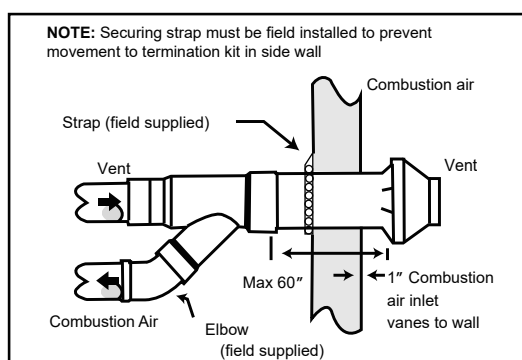

Submittal Information

Part No. 22152-22153-22154
Document No. SPEC22152
Date 2020-01-20
Revision 01

Warning

- Do not use the Concentric Vent kit for anything other than a Category IV furnace. Failure to follow this warning could result in fire, personal injury or death.
- Do not operate the furnace until the installation and assembly of the Concentric Vent and all piping are completed. Failure to follow this warning could result in product damage or improper operation, personal injury or death.
- Recirculation of flue gasses may occur, causing the intake pipe to freeze shut during cold weather operation if the venting system is not installed per these guidelines. If the venting system is not installed properly, flue gas may recirculate, possibly causing the intake pipe to freeze shut during cold weather.
- Birth Defects, Reproductive Harm, and Cancer- www.p65warnings.ca.gov

General Properties

Material: Polyvinyl Chloride (PVC)
Finish: Plain White
Standard: ASTM-D1785, UL-1738.

NOTE: The Concentric Vent reduces the allowable intake/vent piping length by 5 feet from that listed in the basic furnace installation instructions.

Each concentric vent kit contains the following items:

- (1) Combustion Air Inlet Cap
- (1) Air Inlet Pipe
- (1) Vent Pipe
- (1) Intake/Vent Concentric WYE Tee
- (1) Installation Instructions on box

Features

- Cut only one hole instead of traditionally cutting two holes through roof or side wall for exhaust and intake pipes to complete installation.
- The concentric design make intake fresh air cut off exhausting smoke. Preferred vertical roof termination which is less susceptible to damage, reduces the chance of intaking contaminants, and has less visible vent vapors. Horizontal side wall termination installation. Dakota Sourcing also provide side wall horizontal termination kit as more options. Vent screens are available for necessary applications.
- The Concentric Vent reduces the allowable intake/vent piping length by 5 feet from that listed in the basic furnace installation instructions.

NOTE: Refer to installation instructions provided with each unit. Install in accordance with local plumbing code. Complied with UL 1738.

2" vents can be adapted to PVC pipe by using **PASCO 59 series socket to pipe coupling size 2" #5922**

