


Job: _____
 Engineer: _____
 Contractor: _____
 Prepared By: _____ Date: _____
 Model: _____ Indoor/Outdoor: _____



Raypak Header Mounted Pumps

Boilers, Water Heaters & Pool Heaters
 Raytherm™ & Hi Delta™

One Piece Low Lead Cast Bronze Impeller
Cast Iron Pump Body
100% Factory Tested
5/8" Steel Alloy Shaft
Ceramic Mechanical Seal
Permanently Lubricated Ball Bearings
Resilient Mount Motor
175 PSI Max Pressure Rating
250°F Maximum Temperature Rating

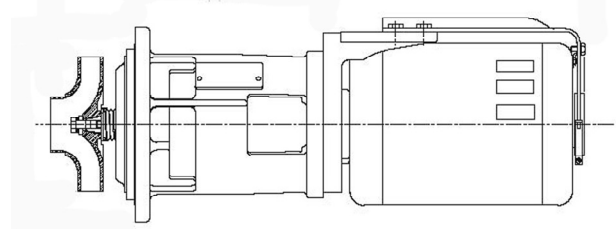

 Proudly Made in the USA

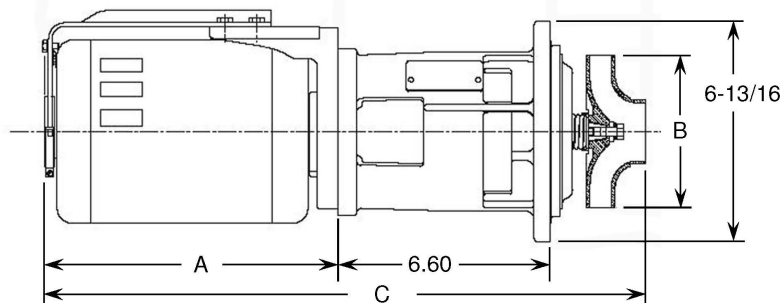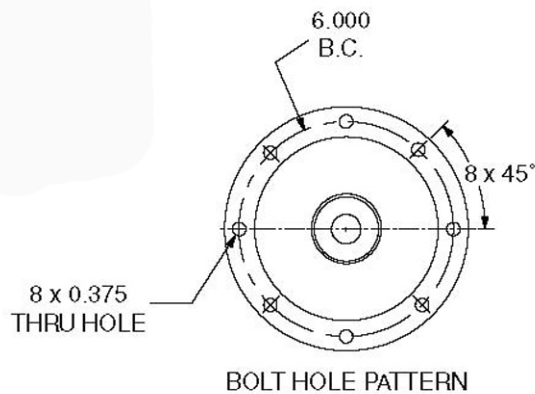

Part Number	HP	Speed RPM	Volts	Hz	Ph	Service Factor	Ambient Temp.	A	B	C	Amps
004844F	1/2	1725	115	60	1	1.00	60°C/140°F	8.92	4.25	18.45	7.9
004845F	1/2	1725	115	60	1	1.25	60°C/140°F	9.67	4.70	19.20	7.3
009296F	1/2	1725	115	60	1	1.00	60°C/140°F	8.92	4.00	18.45	7.9

Raypak
 A Rheem Company

Raypak Header

Mounted Pumps

Part Number _____

Raytherm Configuration		
Model	004844F	004845F
514	☐	☐
624	☐	☐
724	☐	☐
824	☐	☐
926/962	☐	☐
1083/1125	☐	☐
1287/1336	☐	☐
1414/1468	☐	☐
1571/1631	☐	☐
1758/1826	☐	☐

Hi Delta Configuration			
Model	004844F	004845F	009296F
302	N/A	☐	N/A
402	N/A	☐	N/A
502	N/A	☐	☐
652	N/A	☐	☐
752	☐	N/A	N/A
902	N/A	☐	☐
992	☐	N/A	☐
1262	N/A	N/A	☐
1532	N/A	☐	N/A

Pump selection is based on a maximum 75 equivalent feet of tubing equal to the connection size of the appliance. Refer to the product I&O manual for allowable water hardness when used on Domestic Hot Water systems.