

RECTORSEAL

A CSW Industrials Company

PRODUCT DATA SHEET

RECTORSEAL BLUE+™ Non-Hardening Pipe Thread Sealant

Description

RectorSeal BLUE+ is a non-hardening thread sealant containing PTFE plus synthetic fibers. These fibers dispersed in a resinous base combined with inert mineral fillers provide maximum sealing performance. Its low coefficient of friction allows tighter joint makeup with lower torque. It also breaks out easily without galling, seizing, or damaging threads. It is excellent for service where immediate pressurization is necessary. RectorSeal® BLUE+ is non-toxic in accordance with NSF Standard 61. In addition, it is CSA Certified.



Applications

RectorSeal BLUE+ can be used on a variety of metal and plastic piping including iron, galvanized steel, stainless steel, brass, copper, aluminum, polyethylene, reinforced fiberglass, PVC, ABS and CPVC including FlowGuard Gold®*. Certified to IAPMO PS-36 for use with PE, PVC, ABS and CPVC.

* FlowGuard Gold is a registered trademark of Lubrizol Advanced Materials inc.

RectorSeal BLUE+ is recommended for pipe carrying:

- Acids, dilute
- Air, compressed
- Aliphatic solvents
- Ammonia, gaseous and liquid
- Caustics, dilute
- Cutting oils (low aromatic)
- Heating oils
- Helium, gaseous
- Hydraulic oils
- Hydrogen, gaseous
- Inert gases, gaseous
- Kerosene
- Liquified petroleum gases (butane, propane, mixtures)
- Natural gas
- Nitrogen, gaseous
- Refrigerants
- Soap, liquid
- Vegetable oils
- Water (hot or cold) Mineral oils

Not recommended for oxygen, chlorine and other oxidizers.

Characteristics | Features

- PTFE enriched
- Allows immediate pressurization
- For use with potable water (hot or cold)
- Non-hardening and will not dry out in the can
- Formulated for plastic and metal pipe
- Smooth easy application
- Non-flammable
- Non-separating
- Lubricates and protects threads
- Low odor
- Lead free and contains no other metals
- For pressures up to 10,000 psi (liquids) and 2,000 psi (gases)

Packaging

Code	Size	Qty. per Case	Lbs. per Case	Cubic Feet
31633	1/4 Pint Brush Top (118 ml)	24 Cans	12	0.18
31553	1/2 Pint Brush Top (237 ml)	24 Cans	21	0.45
31433	Pint Brush Top (473 ml)	12 Cans	19	0.43

Instructions

Step 1 Stir before using. Wipe threads clean.

Step 2 For pipe diameters up to 1¼", apply to male threads only. For larger sizes, apply to both male and female threads.

Step 3 Join and tighten pipe to ANSI Standards. Piping may be placed into service immediately.

For additional technical information, call toll free 1-800-231-3345.

Precautions

FOR CHEMICAL EMERGENCY, SPILL, LEAK, FIRE EXPOSURE OR ACCIDENT,
CALL CHEMTREC - DAY OR NIGHT 1-800-424-9300



KEEP OUT OF REACH OF CHILDREN.

For additional information, refer to Safety Data Sheet.

Specifications

Wt/Gal @ 77°F	~9.5 lbs/gal
VOC	0 g/L
Flash Point SETA CC	Greater than 300°F (149°C)
Non-volatiles	100%
Color:	Blue
Shelf Life	2 years
Federal Specification	TT-S-1732

Approvals

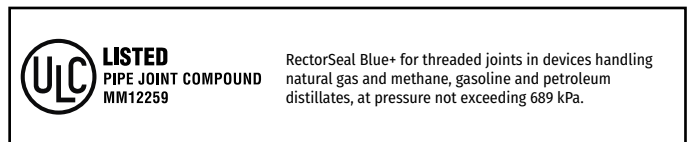

FBC™ System Compatible indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with Flowguard Gold®, Blazemaster® and Corzan® piping systems and products made with TempRite® Technology.

The FBC System Compatible Logo, FBC™, FlowGuard Gold®, BlazeMaster®, Corzan® and TempRite® are trademarks of Lubrizol Advanced Materials, Inc. or its affiliates.



Meets ANSI LC 7-2009 Working Temperature Range -40°F to 125°F. Maximum Working Pressure: 125 psi. For Use with Natural Gas & LP (VAPOR STATE ONLY). Use on Steel, Galvanized Steel, Iron, Brass, Copper and Aluminum. For Pipe Size Up to And Including 1¼" inch.

Suggestions and recommendations covering the use of our products are based on our past experience and laboratory findings. However, as we have no control as to the methods and conditions of application, we only assume responsibility for the uniformity of our products within manufacturing tolerances.

Limited Warranty



For more information on our product limited warranty, visit RectorSeal.com

Manufactured by **RectorSeal, LLC • 2601 Spenwick Drive, Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • rectorseal.com**

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor's and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2022 RectorSeal. All rights reserved. R50205-1222