



PROJECT NAME \_\_\_\_\_  
LOCATION \_\_\_\_\_  
ARCHITECT \_\_\_\_\_  
ENGINEER \_\_\_\_\_  
CONTRACTOR \_\_\_\_\_  
SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

#### UNIT SUMMARY

|                     |  |  |  |  |  |  |
|---------------------|--|--|--|--|--|--|
| Quantity            |  |  |  |  |  |  |
| Unit Designation    |  |  |  |  |  |  |
| Model No.           |  |  |  |  |  |  |
| Total Cooling       |  |  |  |  |  |  |
| Sensible Cooling    |  |  |  |  |  |  |
| Air Ent. Evaporator |  |  |  |  |  |  |
| Air Lvg. Evaporator |  |  |  |  |  |  |
| Heating Input       |  |  |  |  |  |  |
| Heating Output      |  |  |  |  |  |  |
| CFM/ESP             |  |  |  |  |  |  |
| EER/SEER            |  |  |  |  |  |  |
| Electrical          |  |  |  |  |  |  |
| Minimum Ampacity    |  |  |  |  |  |  |
| Min.-Max. Breaker   |  |  |  |  |  |  |
| Net Unit Weight     |  |  |  |  |  |  |
| Accessory           |  |  |  |  |  |  |
| Catalog Form Number |  |  |  |  |  |  |

#### ACCESSORIES:

#### NOTES:

# Endeavor® Line (-)A19AY iM Air Conditioners

## Cooling Efficiencies up to: 20.0 SEER2 / 13 EER2

## Nominal Sizes: 2 to 5 Tons [7.0 to 17.6 kW]

## Cooling Capacities: 22.8 to 54 kBTU [6.7 to 15.83 kW]

## Refrigerant Type: R-454B

JOB NAME \_\_\_\_\_ LOCATION \_\_\_\_\_

CONTRACTOR \_\_\_\_\_ ORDER NO. \_\_\_\_\_

ENGINEER \_\_\_\_\_ UNIT MODEL NO. \_\_\_\_\_

SUBMITTED FOR ☐ APPROVAL ☐ RECORD COIL MODEL NO. \_\_\_\_\_

DATE \_\_\_\_\_ AIR HANDLER MODEL NO. \_\_\_\_\_

### UNIT DATA

#### COOLING PERFORMANCE

EFFICIENCY ..... SEER

TOTAL CAPACITY\* ..... MBH [kW]

SENSIBLE CAPACITY\* ..... MBH [kW]

OUTDOOR DESIGN TEMP. .... °F [°C] DB

TEMP. OF AIR ENTERING  
EVAPORATOR COIL ..... °F [°C] DB

..... °F [°C] WB

POWER INPUT REQUIREMENT ..... kW

(\*uses blower motor heat)

#### HEATING PERFORMANCE

EFFICIENCY ..... HSPF

TOTAL CAPACITY\* ..... MBH [kW]

OUTDOOR DESIGN TEMP. .... °F [°C] DB

TEMP. OF AIR ENTERING  
EVAPORATOR COIL ..... °F [°C] DB

#### SUPPLY AIR BLOWER PERFORMANCE

TOTAL AIR SUPPLY ..... CFM [L/s]

TOTAL RESISTANCE EXTERNAL  
TO UNIT ..... IWG

BLOWER SPEED ..... RPM

POWER OUTPUT REQUIREMENT ..... BHP

MOTOR RATING ..... HP [W]

POWER INPUT REQUIREMENT ..... kW

#### ELECTRICAL DATA

POWER SUPPLY ..... Hz

TOTAL UNIT AMPACITY ..... AMPS

MINIMUM WIRE SIZE ..... AWG

MAXIMUM OVERCURRENT DEVICE  
FUSES/HACR BREAKER ..... AMPS

#### CLEARANCES

ACCESS SIDE 24" [609.6 mm]

AIR INLETS 12" [304.8 mm]

ABOVE UNIT 60" [1524 mm]



### FEATURES

- **EcoNet® Enabled:** Automatic system configuration and optimization
- **PlusOne® Diagnostics & Bluetooth<sup>1</sup> Connectivity:** With the Contractor & EcoNet® Apps, built-in technology makes advanced set-up, monitoring, troubleshooting, and repairing the product easier than ever before
- **Brushless DC Condenser Motors (BLDC):** Enhances reliability and allows for easier serviceability
- **Swept Wing Fan Technology:** Features quieter operation and improved unit acoustics
- **PlusOne® Expanded Valve Space:** 3 in. – 4 in. – 5 in. service valve space—provides a minimum working area of 27-square inches for easier access
- **PlusOne® Triple Service Access:** 15 in. wide, industry leading corner service access, two fastener, removeable corner and individual louver panels – makes repairs easier and faster
- **Designing for Sustainability with Low GWP:** For 2025, the Environmental Protection Agency (EPA) has set a global warming potential (GWP) limit of 700 for refrigerant used in heating and cooling systems. This new requirement will result a 78%<sup>2</sup> lower GWP than previous-generation refrigerants – with only minimal changes to system installation. For us, this is another step toward our continued sustainability goal of educing greenhouse gas emissions, while still delivering an exceptional level of energy efficient, dependable comfort
- **PlusOne® Refrigerant Detection System<sup>TM3</sup>:** An integrated one-box, patented design featuring the A2L sensor and mitigation board, offering easier commissioning with a single component and simplified wiring configuration, compatibility with any 24V thermostat application and system protection by automatically pausing outdoor unit operation – if excess refrigerant is detected

### ACCESSORIES/OPTIONS

Compressor Sound Cover ..... ☐


EcoNet® Smart Thermostat ..... ☐

Supply/Return Sensor ..... ☐

<sup>1</sup>The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rheem® is under license. Other trademarks and trade names are those of their respective owners. <sup>2</sup>When comparing the GWP of R-454B to R-410A refrigerant. <sup>3</sup>Factory or field installed in the furnace coil or air handler and is applicable to the complete heating and cooling system featuring Low GWP Refrigerant (A2L). <sup>4</sup>Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR®. Ask your Contractor for details or visit [www.energystar.gov](http://www.energystar.gov).



(-)A19AY

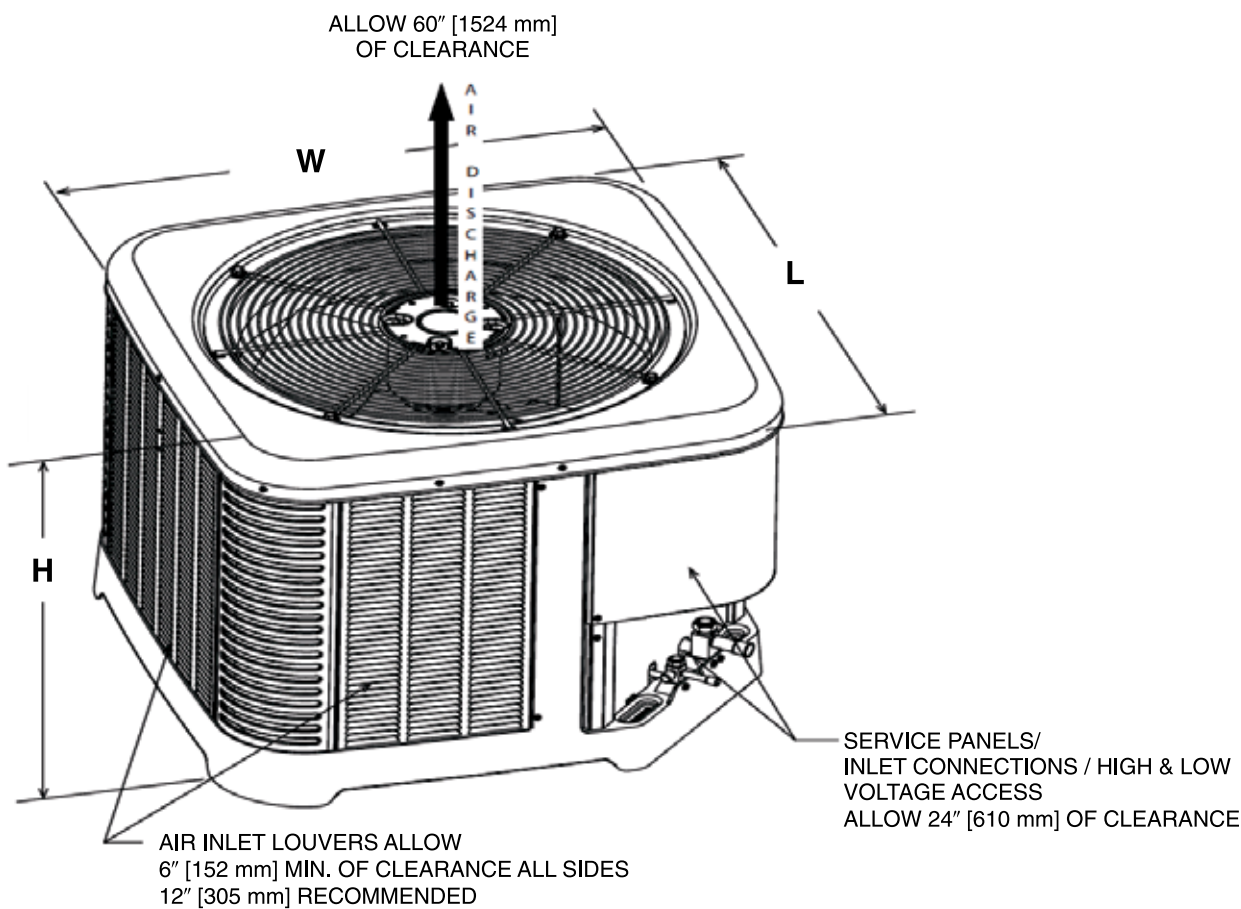

ST-A1226-02-00

Unit Dimensions

| MODEL NO.       | OPERATING  |      |            |     |           |     | SHIPPING   |      |            |      |           |      |
|-----------------|------------|------|------------|-----|-----------|-----|------------|------|------------|------|-----------|------|
|                 | H (Height) |      | L (Length) |     | W (Width) |     | H (Height) |      | L (Length) |      | W (Width) |      |
|                 | INCHES     | mm   | INCHES     | mm  | INCHES    | mm  | INCHES     | mm   | INCHES     | mm   | INCHES    | mm   |
| (-)A19AY24AJVCA | 45.17      | 1147 | 36.13      | 918 | 36.13     | 918 | 48.18      | 1224 | 39.37      | 1000 | 39.64     | 1007 |
| (-)A19AY36AJVCA | 51.17      | 1300 | 36.13      | 918 | 36.13     | 918 | 53.56      | 1360 | 39.37      | 1000 | 39.64     | 1007 |
| (-)A19AY48AJVCA | 51.17      | 1300 | 36.13      | 918 | 36.13     | 918 | 53.56      | 1360 | 39.37      | 1000 | 39.64     | 1007 |
| (-)A19AY60AJVCA | 51.17      | 1300 | 36.13      | 918 | 36.13     | 918 | 53.56      | 1360 | 39.37      | 1000 | 39.64     | 1007 |

[ ] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

5600 Old Greenwood Road  
Fort Smith, Arkansas 72908