



The new degree of comfort.®



Residential Gas
Professional *Classic* Power Vent
Ultra Low NOx Water Heaters

Professional *Classic*® Power Vent Ultra Low NOx gas water heaters are SCAQMD rule 1121 compliant and offer flexible venting options

Efficiency

- .64 - .68 UEF
- ENERGY STAR® rated
- More hot water at a low operating cost

Performance

- FHR: 67 - 86 gallons for natural gas
- Recovery: 36.4 to 38.4 GPH at a 90° F rise, depending on model

Guardian System™ & Sensor

- Maintenance free – no filter to clean
- Protective control system that disables the heater in the presence of flammable vapor accumulation

Low Emissions

- Ultra Low NOx radiant burner design
- Stainless steel construction
- SCAQMD Rule 1121 compliant
- Meets 10 ng/J NOx requirements

Self-Cleaning

- EverKleen® patented system fights sediment build-up
- Reduces fuel costs
- Provides more hot water

Flexible Venting Options

- Long venting lengths up to 100 feet
- PVC, ABS, or CPVC vent pipe options
- Vertical or horizontal termination

Longer Life

- Premium grade anode rod provides long-lasting tank protection

High Altitude Compliant

- Certified to 7,000 ft. above sea level; 10,199 ft. with kit

Plus...

- Whisper quiet blower
- Enhanced flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Durable spark-to-pilot ignitor

Warranty

- 6-Year limited tank and parts warranty*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.




Professional *Classic* Power Vent Ultra Low NOx

40 and 50-Gallon Capacities
Up to 38,000 BTU/h
Natural Gas



LEED Point = 1

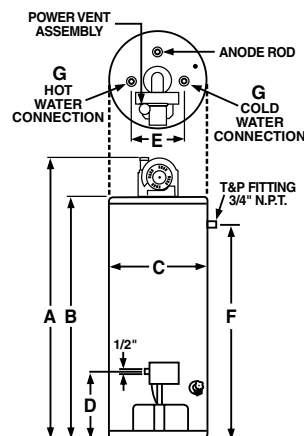

See venting information on back.

DESCRIPTION				FEATURES			ROUGHING IN DIMENSIONS (SHOWN IN INCHES)								ENERGY INFO.
TYP E	NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT.	RECOVERY IN G.P.H. 90° F RISE NAT.	UEF FIRST HR. DEL. G.P.H. NAT.	HT. TO TOP OF ASSEMBLY A	TANK HEIGHT B	DIAM. C	HT. TO GAS CONN. D	WATER CONN. CENTER E	HT. TO SIDE T&P VALVE F	WATER CONN. SIZE G	SHIP WT. (LBS)	UNIFORM ENERGY FACTOR (UEF)
Tall	40	38	PROG40-36U RH67 PV-2	36	36.4	67	67-3/8	59	19-3/4	14	8	53-1/2	3/4	160	0.64
Tall	50	48	PROG50-38U RH67 PV-2	38	38.4	86	66-3/8	58	21-3/4	14	8	52-1/2	3/4	188	0.68

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.



INTEGRATED HOME COMFORT



The new degree of comfort.®



Residential Gas
Professional **Classic** Power Vent
Ultra Low NOx Water Heaters

40 and 50-Gallon Models Maximum and Minimum Vent Lengths

Maximum and Minimum Vent Lengths for 2" Vents

NUMBER OF 90° ELBOWS WITH VENT TERMINAL	NUMBER OF 45° ELBOWS	MINIMUM PIPE LENGTH REQ. (FT.)	MAXIMUM PIPE LENGTH (FT.)
One (1)	None	3.0	44.0
One (1)	One (1)	3.0	41.0
Two (2)	None	3.0	38.0
Two (2)	One (1)	3.0	35.0
Three (3)	None	3.0	32.0

For the 2" vent, one 90° elbow is approximately equal to 6 feet of pipe.
One 45° elbow is approximately equal to 3 feet of pipe.

NOTICE: The mixing of 2" and 3" vent pipe is not recommended. If 3" pipe is used, a 2" to 3" reducer fitting is recommended at the rubber coupling.

This water heater is supplied with a 2" Schedule 40 PVC 45° vent terminal. When venting with 3" pipe, a Schedule 40 PVC 45° vent terminal must be used. Screens for both 2" and 3" vent terminals have been included.

Maximum and Minimum Vent Lengths for 3" Vents

NUMBER OF 90° ELBOWS WITH VENT TERMINAL	NUMBER OF 45° ELBOWS	MINIMUM PIPE LENGTH REQ. (FT.)	MAXIMUM PIPE LENGTH (FT.)
One (1)	None	3.0	95.0
One (1)	One (1)	3.0	92.5
Two (2)	None	3.0	90.0
Two (2)	One (1)	3.0	87.5
Three (3)	None	3.0	85.0
Three (3)	One (1)	3.0	82.5
Four (4)	None	3.0	80.0
Four (4)	One (1)	3.0	77.5
Five (5)	None	3.0	75.0

For the 3" vent, one 90° elbow is approximately equal to 5 feet of pipe.
One 45° elbow is approximately equal to 2.5 feet of pipe.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100
Roswell, Georgia 30076 • www.rheem.com



INTEGRATED HOME COMFORT