

SAMSUNG

Submittal Data

PC4NUFMUNW, PC4NBFMUNW

Fasic Panel for WindFree™* 4-Way Cassette Indoor Units

Job name: _____

Location: _____

Purchaser: _____

Engineer: _____

Submitted to: _____

Reference ☐ Approval ☐ Construction ☐

Unit designation: _____

Schedule #: _____



	Model Number	Description
☐	PC4NUFMUNW	WindFree™* 4-Way Cassette Fascia panel - White
☐	PC4NBFMUNW	WindFree™* 4-Way Cassette Fascia panel - Black

Specifications

- Fascia panel for Samsung WindFree™* 4-Way Cassette indoor units
- The fascia panel shall include an integral Wi-Fi adapter as standard for indoor unit remote monitoring and control via Samsung SmartThings (R32 models and R410A CAC models that support single Wi-Fi adapter connection).
- HIPS chassis certified to UL94 V0
- 4 X motorized, auto swing louvers with independent louver control capability (32° - 65° louver control range)
- Built-in IR receiver for optional wireless control (purchased separately).
- LED status display
- Accommodates Samsung motion sensor (MCR-****) for occupancy sensing capability (refer to indoor unit technical documents for compatible MDS model number)
- The panel shall include 1 X washable, pleated filter and all necessary mounting hardware as standard.
- Panel corners are removable to easily level unit and adjust height
- Fascia panel is powered and controlled by the indoor unit PCB
- White and black color options

Dimensions

L X W X H (inches)	37 3/8 X 37 3/8 X 1 7/8
Weight (lbs.)	13.9

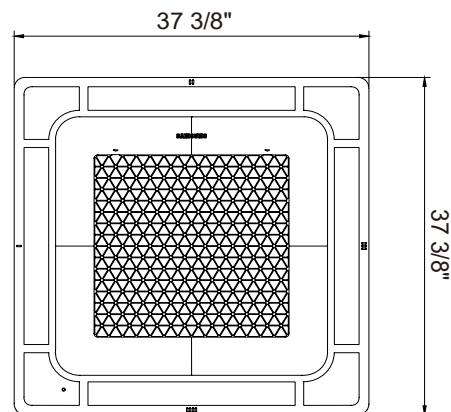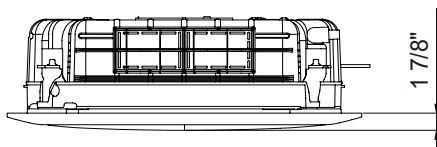

*The WindFree™ unit delivers an air current that is under 0.15 m/s while in WindFree™ mode. Air velocity that is below 0.15 m/s is considered "still air" as defined by ASHRAE (American Society of Heating, Refrigerating, and Air Conditioning Engineers).

Samsung HVAC maintains a policy of ongoing development. Specifications are subject to change without notice.

Version: 04152025

www.SamsungHVAC.com