


Job Name _____
 Purchaser _____
 Submitted to _____
 Unit Designation _____

Location _____
 Engineer _____
 Reference ☐ Approval ☐ Construction ☐
 Schedule # _____

Specifications

- Fascia panel for Samsung, Mini 4-Way cassette indoor units (AM0**NNNDCH/AA, AJ0**NBNDCH/AA)
- HIPS chassis certified to UL94 V0
- 4 X motorized, auto swing louvers
- Built-in IR receiver for optional wireless control
- Four LED lights to display power status, filter reminder, error status, defrost notification, and timer functions (where applicable)
- The panel shall include 1 X electrostatic, washable, pleated filters and all necessary mounting hardware as standard
- Louvers and panel display are powered and controlled by the indoor unit PCB
- Panel corners are removable to easily level unit and adjust height
- Accommodates Samsung motion sensor (MCR-SMD) for occupancy sensing capability
- The Wind-Free™ function will close the supply air outlet louvers while in cooling mode to gently disperse cool air into the space without blowing directly onto occupants. The Wind-Free™ features are optional and can be enabled using central or local control options. (MWR-SH11N, MWR-WE13(N), AR-EH03U only)
- The Wind-Free™ panel has an integral humidity sensor that will open the louvers for standard cooling mode when space conditions could potentially cause condensation formation on the panel surface.
- Dimensions (L X W X H): 24 3/8" X 24 3/8" X 2 1/4"
- Weight: 5.95 lbs.

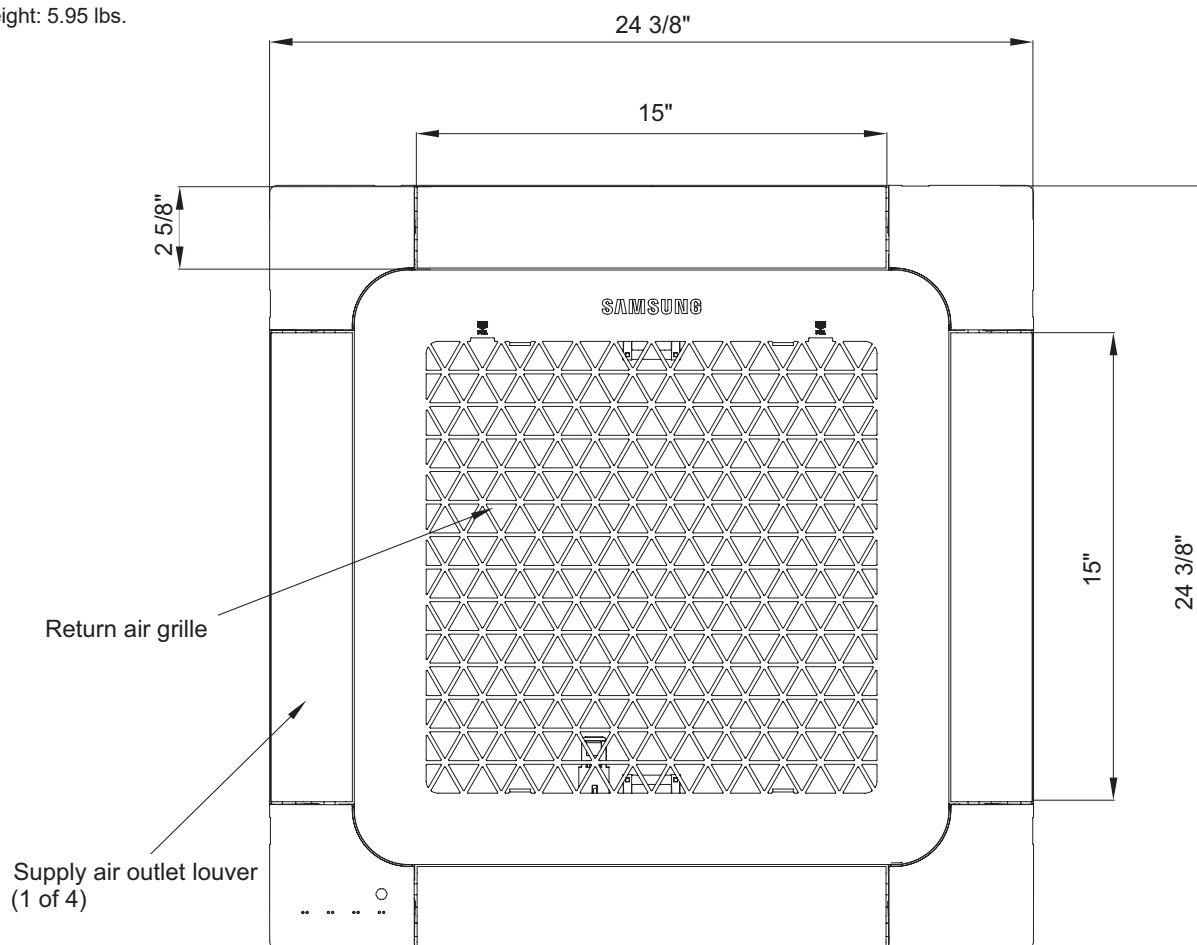

Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.