

SAMSUNG

Submittal Data

PC6NBSMUNW, PC6NUSMUNW, PC6EBSMUNW, PC6EUSMUNW

Fasic Panel for 360 Cassette Indoor Units

Job name: _____

Location: _____

Purchaser: _____

Engineer: _____

Submitted to: _____

Reference ☐ Approval ☐ Construction ☐

Unit designation: _____

Schedule #: _____

	Model Number	Description
☐	PC6NBSMUNW	Black, "ceiling type" (square)
☐	PC6NUSMUNW	White, "ceiling type" (square)
☐	PC6EBSMUNW	Black, "open type" (round)
☐	PC6EUSMUNW	White, "open type" (round)


Specifications

- Fascia panel for Samsung 360 cassette indoor units
- The fascia panel shall include an integral Wi-Fi adapter as standard for indoor unit remote monitoring and control via Samsung SmartThings (R32 models and R410A CAC models that support single Wi-Fi adapter connection).
- HIPS chassis certified to UL94 V0
- Built-in IR receiver for optional wireless control (purchased separately).
- The white square fascia panel shall accommodate Samsung motion sensor (MCR-*** for occupancy sensing capability (refer to indoor unit technical documents for compatible MDS model number).
- The panel shall include 1 X washable, pleated filter and all necessary mounting hardware as standard.
- "Ceiling type" (square) and "open type" (round) options are available
- White and black color options


Dimensions

Ceiling Type (Square)	L X W X H (inches)	39 3/8 X 39 3/8 X 2 5/8
	Weight (lbs.)	8.82
Open Type (Round)	Diameter X H (inches)	41 3/8 X 3 3/8
	Weight (lbs.)	6.62

Ceiling Type

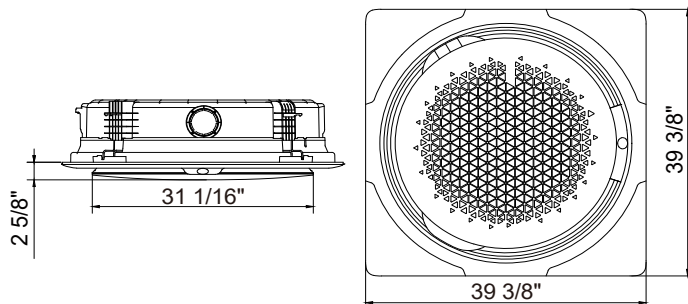

Open Type

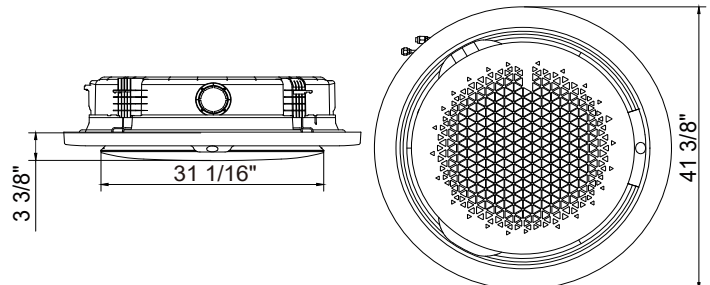

Samsung HVAC maintains a policy of ongoing development. Specifications are subject to change without notice.