


1017	DRAWN BY: BS	CHECKED BY: TD	APPROVED BY: TD	DATE: 5-24-85	SCALE: NONE	SIZE: A	DRAWING NUMBER: S1017	S						
	 SMITH JAY R. SMITH MFG. CO. MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com  ASPE  PDH  NIBS								LOCATION					
	ROOF DRAINS													
	IRMA ROOF APPLICATIONS													
Free Area 102.5 SQ IN (661) SQ CM  Labels: Polyethylene Dome, Perforated Stainless Steel Extension, Flashing Clamp, Underdeck Clamp (When Specified) Dimensions: 5 1/4 (135), 4" (100) Unless Otherwise Specified, *3 3/4 (95), Δ5 (125), 11 (280) DIA, 15 1/4 (390) DIA, 1 1/8 (29) MIN, A Δ Same for Caulk, NO-HUB and Speedi-Set®, 3 3/4 (95) for Threaded A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150) ☐ Fig. 1017C CAULK OUTLET ☐ Fig. 1017Y NO-HUB OUTLET ☐ Fig. 1017T THREADED OUTLET recommended deck opening <table border="1" style="border-collapse: collapse;"> <tr> <td>with suffix -R</td> <td>17(430) DIA</td> </tr> <tr> <td>less suffix -R</td> <td>14(355) DIA</td> </tr> </table> *This Dimension to Internal Stop of Speedi-Set® Gasket.									with suffix -R	17(430) DIA	less suffix -R	14(355) DIA		
with suffix -R	17(430) DIA													
less suffix -R	14(355) DIA													
REGULARLY FURNISHED: Duco Cast Iron Body with Flashing Clamp, Perforated Stainless Steel Extension, Gravel Stop and Polyethylene Dome. NOTE: Dimensions shown in parentheses are in millimeters. VARIATIONS: ☐ Expansion Joint (Specify Fig. 1710) ☐ Extension -E (Specify Height) ☐ "L" Shaped Underdeck Clamp -CL ☐ L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only ☐ LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only ☐ Sump Receiver -R ☐ Underdeck Clamp -C ☐ Vandal Proof Dome -U ☐ Roof Deck Plate -RDP OPTIONAL MATERIALS: ▲ ☐ Aluminum Dome -AD ▲ ☐ Cast Iron Dome -CID ▲ ☐ Galvanized Cast Iron Body & Collar -G ▲ ☐ Galvanized Cast Iron Dome -CIDG ▲ ☐ Rough Bronze Dome -RBD ☐ High Flow Collar and Polyethylene Dome -HFP ☐ High Flow Collar and Vandal Proof Polyethylene Dome -HFPU ▲ Optional domes' free area are as follows: <table style="width: 100%;"> <tr> <td>Aluminum</td> <td>98 (632)</td> </tr> <tr> <td>Cast Iron</td> <td>80 (516)</td> </tr> <tr> <td>Bronze</td> <td>95 (613)</td> </tr> </table>									Aluminum	98 (632)	Cast Iron	80 (516)	Bronze	95 (613)
Aluminum	98 (632)													
Cast Iron	80 (516)													
Bronze	95 (613)													
FIGURE NUMBER	S R Q P	1-13-26 3-27-24 9-27-23 3-7-23	Revised Optional Materials Revised Variations, Fig. Opts. Removed Function Added @ to "Speedi-Set"	TB HS HS KK	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1017						
REV.	DATE	DESCRIPTION			BY	CKD. BY								

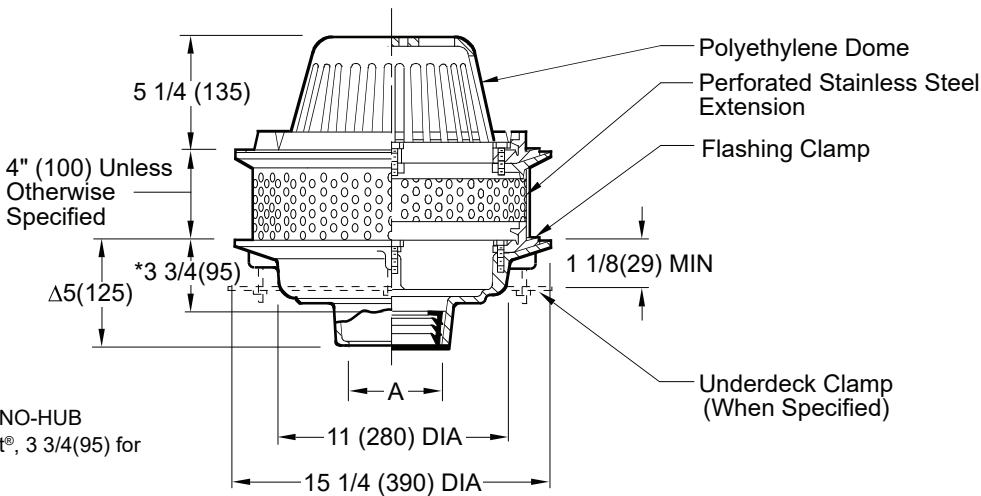

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov