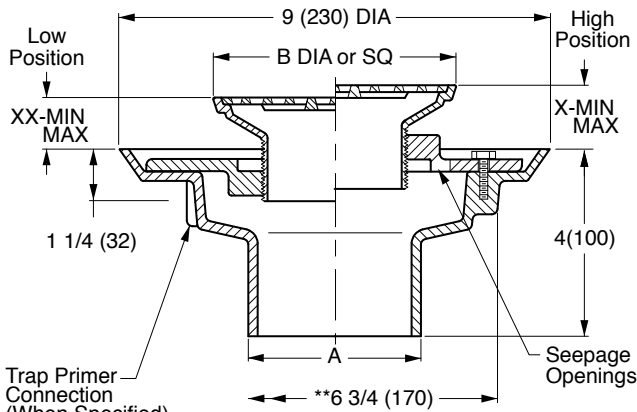
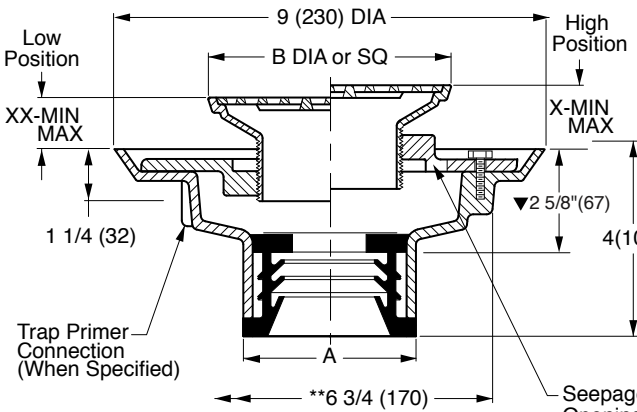


W	JAY R. SMITH MFG. CO. MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com MEMBER OF: MEMBER OF: MEMBER OF:				LOCATION	
	FLOOR OR SHOWER DRAINS WITH ADJUSTABLE STRAINER HEADS					
DRAWING NUMBER	S2005					
	SIZE	A				
SCALE:		NONE				
	DATE:	5-17-85				
APPROVED BY:		TD				
	CHECKED BY:	TD				
DRAWN BY:		PJ				
	FIGURE NUMBER	2005				

General service floor drain for use in showers, toilets, kitchens and other finished areas where foot traffic is expected.

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.





A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

NO-HUB OUTLET

☐ Fig. 2005Y.....(A) ROUND TOP
☐ Fig. 2005Y.....(B) SQUARE TOP

Outlet Size	Nickel Bronze Strainer Head
▲ 02(50)	05(125) DIA or SQ
▲ 03(75)	06(150) DIA or SQ
▲	08(205) DIA or SQ

SPEEDI-SET OUTLET

☐ Fig. 2005L.....(A) ROUND TOP
☐ Fig. 2005L.....(B) SQUARE TOP

Strainer Size B DIA or SQ	*Collar In High Position X		*Collar In Low Position XX		Free Area SQ IN (SQ CM)	
	MIN	MAX	MIN	MAX	ROUND	SQUARE
05 (125)	1 1/4(32)	2 1/4(57)	3/4(19)	1 5/8(41)	7(45)	6.5(42)
06 (150)	1 1/4(32)	2 1/4(57)	3/4(19)	1 5/8(41)	9(58)	12.5(81)
07 (180)	1 1/4(32)	2 1/4(57)	7/8(22)	1 7/8(48)	14(90)	11(71)
08 (205)	1 1/2(38)	2 1/2(64)	1(25)	1 7/8(48)	17(110)	14(90)
*09 (230)	1 1/2(38)	2 3/8(60)	1(25)	1 7/8(48)	18(116)	16(103)
*10 (255)						

▼ This dimension to internal stop of speedi-set gasket.

* Add 3/8"(10) to all min/max dimensions for round strainers.

* Collar is reversible to obtain extreme high and low strainer positions.

** Not available for 5"(125) size strainer.

** MIN 6 3/4"(170) hole required for core drilled application.

REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Collar and Adjustable Strainer Head as Indicated by Suffix Letter Selected.

VARIATIONS:

- ☐ Flapper Type Backwater Valve -V (NOTE 2)
- ☐ Hinged Grate -H (NOTE 1)
- ☐ L Speedi-Set Service Weight 2(50), 3(75) & 4"(100) only
- ☐ LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100) only
- ☐ Sediment Bucket -B
- ☐ Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- ☐ Vandal Proof Screws -U
- ☐ Wide Flanged Strainer (Specify Fig. DX2005)
- ☐ T Threaded Outlet (Specify 2010T)
- ☐ Heelproof Grate -HP
- ☐ -AHP (Round) or -BHP (Square)
- ☐ Quad Close Trap Seal (Specify Fig. 2692)

OPTIONAL MATERIALS:

- ☐ Bronze Body -BB
- ☐ Chrome Plated Strainer -CP
- ☐ Galvanized Cast Iron Body -G
- ☐ Nickel Bronze Strainer -NB
- ☐ Polished Bronze Strainer -PB
- ☐ All Stainless Steel (Specify Fig. 9700)
- ☐ Stainless Steel Strainers -SS [Available in 05(125) & 06(150) sizes only]

NOTE: Dimensions shown in parentheses are in millimeters.

▲ Meets ASME Standard A112.6.3-2001 02(50), 03(75) or 04"(100) sizes only.

NOTE 1: Sediment Bucket -B not provided for a Hinged Grate (-H)

NOTE 2: Sediment Bucket -B not provided for a Ball Float (-BFV) or a Flapper Type (-V)

SEE PM 0457 FOR OPTIONAL STRAINER HEADS.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2005














WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

M	DRAWING NUMBER PM0457 SH 1 of 2							NOTE 1: Sediment Bucket -B not provided for a Hinged Grate (-H) NOTE 2: Sediment Bucket -B not provided for a Ball Float (-BFV) or a Flapper Type (-V)																																															
		OPTIONAL STRAINER HEADS																																																					
		ROUND STRAINER				FLAPPER TYPE BACKWATER VALVE																																																	
		MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB Stainless Steel Strainers -SS [Available in 05(125) & 06(150) sizes only] VARIATIONS: *Hinged Grate (Specify Suffix -AH) (NOTE 1) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B DIA</th> <th>05 (125)</th> <th>06 (150)</th> <th>07 (180)</th> <th>08 (205)</th> <th>09 (230)</th> <th>10 (255)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> <tr> <td>X MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> </tr> <tr> <td>X MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> </table> SUFFIX -A Specify Type, Size & Finish eg: A05NB *Not available for 05" (125) size				B DIA	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)	FUNCTION: Provides backwater protection at point where protection is needed. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: *Hinged Grate (Specify Suffix -AH) Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B SQ</th> <th>05 (125)</th> <th>06 (150)</th> <th>07 (180)</th> <th>08 (205)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> </tr> <tr> <td>X MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> </tr> <tr> <td>X MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> </tr> </table> SUFFIX -AV Specify Type, Size & Finish eg: AV05NB *Not available for 05" (125) size				B SQ	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)
B DIA	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)																																																	
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)																																																	
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)																																																	
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)																																																	
B SQ	05 (125)	06 (150)	07 (180)	08 (205)																																																			
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)																																																			
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																			
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																			
SQUARE STRAINER				STRAINER HEAD w/SQUARE HINGED COVER																																																			
MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -BV) 05 (125), 06 (150), 07 (180) or 08" (205) sizes only (NOTE 2) *Hinged Grate (Specify Suffix -BH) (NOTE 1) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B SQ</th> <th>05 (125)</th> <th>06 (150)</th> <th>07 (180)</th> <th>08 (205)</th> <th>09 (230)</th> <th>10 (255)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> </tr> <tr> <td>X MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> </tr> <tr> <td>X MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/4 (57)</td> <td>2 3/8 (60)</td> </tr> </table> SUFFIX -B Specify Type, Size & Finish eg: B05NB *Not available for 05" (125) size				B SQ	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 1/4 (57)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 3/8 (60)	MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Gasketed Water Tight Cover -GC Secured Cover -SC Secondary Strainer Grate-SG SUFFIX -BS Specify Type, Size & Finish eg: BSNB																							
B SQ	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)																																																	
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 1/4 (57)																																																	
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)																																																	
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 3/8 (60)																																																	
REINFORCED ROUND STRAINER				REINFORCED TRACTOR STRAINER																																																			
FUNCTION: Used in finished floors where light wheeled loads are anticipated. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -CV) (NOTE 2) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B DIA</th> <th>05 (125)</th> <th>06 (150)</th> <th>08 (205)</th> <th>10 (255)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> <tr> <td>MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> <td>1 7/8 (48)</td> </tr> <tr> <td>MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> </table> SUFFIX -C Specify Type, Size & Finish eg: C06NB				B DIA	05 (125)	06 (150)	08 (205)	10 (255)	H	2 (51)	2 (51)	2 1/2 (64)	2 3/4 (70)	MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 7/8 (48)	MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 3/4 (70)	FUNCTION: Used in finished floors where light weight wheeled loads are anticipated and loose set non-tilt tractor grate is desired. MATERIALS: Cast Iron -CI Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -DV or -EV) (NOTE 2) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>SUFFIX</th> <th>B DIA</th> <th>H</th> <th colspan="2">X</th> </tr> <tr> <td></td> <td></td> <td></td> <td>MIN</td> <td>MAX</td> </tr> <tr> <td>-D</td> <td>07 (180)</td> <td>3 1/4 (83)</td> <td>2 5/8 (67)</td> <td>3 1/2 (89)</td> </tr> <tr> <td>-E</td> <td>09 (230)</td> <td>3 1/2 (89)</td> <td>2 3/4 (70)</td> <td>3 1/2 (89)</td> </tr> </table> SUFFIX -D-E Specify Type, Size & Finish eg: D07PB, E09PB				SUFFIX	B DIA	H	X					MIN	MAX	-D	07 (180)	3 1/4 (83)	2 5/8 (67)	3 1/2 (89)	-E	09 (230)	3 1/2 (89)	2 3/4 (70)	3 1/2 (89)								
B DIA	05 (125)	06 (150)	08 (205)	10 (255)																																																			
H	2 (51)	2 (51)	2 1/2 (64)	2 3/4 (70)																																																			
MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 7/8 (48)																																																			
MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 3/4 (70)																																																			
SUFFIX	B DIA	H	X																																																				
			MIN	MAX																																																			
-D	07 (180)	3 1/4 (83)	2 5/8 (67)	3 1/2 (89)																																																			
-E	09 (230)	3 1/2 (89)	2 3/4 (70)	3 1/2 (89)																																																			
TILE FLANGE				ADJUSTABLE STRAINER HEAD																																																			
FUNCTION: Provides integral flange set 5/32"(4) below rim to receive floor covering. Flange may have option of tapped holes for securing pan and gasket. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -FV) (NOTE 2) Holes in Flange -SH Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th colspan="2">X</th> </tr> <tr> <td>MIN</td> <td>MAX</td> </tr> <tr> <td>1 1/4 (32)</td> <td>2 1/8 (54)</td> </tr> </table> SUFFIX -F Specify Type, Size & Finish eg: F06NB				X		MIN	MAX	1 1/4 (32)	2 1/8 (54)	FUNCTION: Used in a non-traffic area when a funnel type strainer head is required and space does not allow use of the 3500 series funnel. The extended rim allows use as an anti-flood and anti-splash drip pan. VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -F37V or F38V) MATERIALS: Cast Iron -CI Chrome Plated -CP Galvanized Cast Iron -G Polished Bronze -PB Nickel Bronze -NB <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>SUFFIX</th> <th>-F37</th> <th>-F38</th> </tr> <tr> <td>B DIA</td> <td>07 (180)</td> <td>09 (230)</td> </tr> <tr> <td>H</td> <td>3 1/4 (83)</td> <td>3 1/2 (89)</td> </tr> <tr> <td>X MIN</td> <td>2 5/8 (67)</td> <td>2 3/4 (70)</td> </tr> <tr> <td>X MAX</td> <td>3 1/2 (89)</td> <td>3 1/2 (89)</td> </tr> </table> SUFFIX -F37-F38 Specify Type, Size & Finish eg: F37NB, F38CP				SUFFIX	-F37	-F38	B DIA	07 (180)	09 (230)	H	3 1/4 (83)	3 1/2 (89)	X MIN	2 5/8 (67)	2 3/4 (70)	X MAX	3 1/2 (89)	3 1/2 (89)																											
X																																																							
MIN	MAX																																																						
1 1/4 (32)	2 1/8 (54)																																																						
SUFFIX	-F37	-F38																																																					
B DIA	07 (180)	09 (230)																																																					
H	3 1/4 (83)	3 1/2 (89)																																																					
X MIN	2 5/8 (67)	2 3/4 (70)																																																					
X MAX	3 1/2 (89)	3 1/2 (89)																																																					
FIGURE NUMBER	2010 SERIES OPTIONAL STRAINER HEADS	M	10-8-21	Added NOTE 1 & 2 Rev. Finish (Tractor Stainer) Added Load Rating(s)	KK	JM	FIGURE NUMBER 2010 SERIES OPTIONAL STRAINER HEADS 1 of 2																																																
		L	10-26-20		MW	CL																																																	
		K	7-29-19		MW	JM																																																	
REV.	DATE	DESCRIPTION		BY	CKD. BY																																																		

NOTE: Dimensions shown in parentheses are in millimeters.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

L	 SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com  MEMBER OF:  				LOCATION																																																																												
	OPTIONAL STRAINER HEADS																																																																																
DRAWING NUMBER PM0457 SH 2 of 2 SIZE A SCALE NONE DATE: 5-17-85 APPROVED BY: TD CHECKED BY: TD DRAWN BY: PJ	ASSUME NO RESPONSIBILITY OR USE OF SUPERSEDED OR VOID DATA																																																																																
	LOW DOME STRAINER FUNCTION: Used in gutters and recessed areas where excessive debris build-up is expected. Dome insures drainage even when partly covered.  MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -GV) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: x-small;"> <tr><th>B DIA</th><th>05 (125)</th><th>06 (150)</th><th>08 (205)</th></tr> <tr><th>H</th><td>2 (51)</td><td>2 (51)</td><td>2 1/2 (64)</td></tr> <tr><th>MIN</th><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><th>MAX</th><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> </table> SUFFIX -G Specify Type, Size & Finish eg: G08PB NON-TRAFFIC	B DIA	05 (125)	06 (150)	08 (205)	H	2 (51)	2 (51)	2 1/2 (64)	MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	SOLID HINGED COVER FUNCTION: Used in areas where intermittent drain use is required. Solid cover prevents intrusion of chips, saw-dust, etc., which are swept up before cover is opened for washdown. The secondary strainer prevents debris from entering the waste line.  MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -GV) Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: x-small;"> <tr><th>B DIA</th><th>05 (125)</th><th>06 (150)</th><th>07 (180)</th><th>08 (205)</th></tr> <tr><th>H</th><td>2 (51)</td><td>2 (51)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> <tr><th>MIN</th><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><th>MAX</th><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> </table> SUFFIX -H Specify Type, Size & Finish eg: H05CP LIGHT DUTY	B DIA	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	SPANNER WRENCH COVER FUNCTION: Solid gas tight, vandal proof, threaded cover for areas where intermittent drain use is required. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -JV) Sediment Bucket -B  SUFFIX -J Specify Type, Size & Finish eg: J06NB MEDIUM DUTY <table border="1" style="width: 100%; font-size: x-small;"> <tr><th colspan="2">X</th></tr> <tr><th>MIN</th><th>MAX</th></tr> <tr><td>2 (51)</td><td>3 (76)</td></tr> </table>	X		MIN	MAX	2 (51)	3 (76)																																				
	B DIA	05 (125)	06 (150)	08 (205)																																																																													
	H	2 (51)	2 (51)	2 1/2 (64)																																																																													
	MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																													
	MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																																													
	B DIA	05 (125)	06 (150)	07 (180)	08 (205)																																																																												
	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)																																																																												
	MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																												
	MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																																												
X																																																																																	
MIN	MAX																																																																																
2 (51)	3 (76)																																																																																
REINFORCED SQUARE STRAINER FUNCTION: Used in finished floors where some light wheeled traffic is anticipated. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -KV) Sediment Bucket -B Vandal Proof Screws -U  <table border="1" style="width: 100%; font-size: x-small;"> <tr><th>B SQ</th><th>05 (125)</th><th>06 (150)</th><th>07 (180)</th><th>08 (205)</th></tr> <tr><th>H</th><td>2 (51)</td><td>2 (51)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> <tr><th>MIN</th><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><th>MAX</th><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> </table> SUFFIX -K Specify Type, Size & Finish eg: K07CP LIGHT DUTY	B SQ	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	RECTANGULAR STRAINER FUNCTION: Used in finished floors where light wheeled loads and or heavy foot traffic are anticipated. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Sediment Bucket -B Vandal Proof Screws -U  <table border="1" style="width: 100%; font-size: x-small;"> <tr><th>SUFFIX</th><th>L</th><th>M</th><th>N</th><th>P</th><th>R</th><th>T</th></tr> <tr><td>B x B'</td><td>4 1/2 (115)</td><td>4 1/2 (115)</td><td>5 (125)</td><td>5 (125)</td><td>6 (150)</td><td>5 (125)</td></tr> <tr><td>H</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td><td>2 1/4 (57)</td><td>3 (76)</td><td>2 1/4 (57)</td><td>3 (76)</td></tr> <tr><td>MIN</td><td>1 3/8 (35)</td><td>1 7/8 (48)</td><td>1 3/8 (35)</td><td>2 1/8 (54)</td><td>1 3/8 (35)</td><td>2 1/4 (57)</td></tr> <tr><td>MAX</td><td>2 3/8 (60)</td><td>2 3/4 (70)</td><td>2 3/8 (60)</td><td>3 (76)</td><td>2 3/8 (60)</td><td>3 1/8 (79)</td></tr> </table> SUFFIX -L-M-N-P-R-T Specify Type, Size & Finish eg: LNB LIGHT DUTY	SUFFIX	L	M	N	P	R	T	B x B'	4 1/2 (115)	4 1/2 (115)	5 (125)	5 (125)	6 (150)	5 (125)	H	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	3 (76)	2 1/4 (57)	3 (76)	MIN	1 3/8 (35)	1 7/8 (48)	1 3/8 (35)	2 1/8 (54)	1 3/8 (35)	2 1/4 (57)	MAX	2 3/8 (60)	2 3/4 (70)	2 3/8 (60)	3 (76)	2 3/8 (60)	3 1/8 (79)	ANGLE STRAINER FUNCTION: Shower room drain set at wall and floor junction. Vertical grate openings prevent drain stoppage should flat surface become covered. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Vandal Proof Screws -U  <table border="1" style="width: 100%; font-size: x-small;"> <tr><th>SUFFIX</th><th>B</th><th>C</th><th>D</th><th colspan="2">X</th></tr> <tr><td></td><td></td><td></td><td></td><td>MIN</td><td>MAX</td></tr> <tr><td>-V</td><td>3 1/2 (89)</td><td>3 1/2 (89)</td><td>4 1/2 (115)</td><td>1 5/8 (41)</td><td>2 5/8 (67)</td></tr> <tr><td>-W</td><td>6 3/4 (170)</td><td>6 3/4 (170)</td><td>6 1/2 (165)</td><td>1 5/8 (41)</td><td>2 5/8 (67)</td></tr> </table> SUFFIX -V-W Specify Type, Size & Finish eg: VPB, WNB LIGHT DUTY	SUFFIX	B	C	D	X						MIN	MAX	-V	3 1/2 (89)	3 1/2 (89)	4 1/2 (115)	1 5/8 (41)	2 5/8 (67)	-W	6 3/4 (170)	6 3/4 (170)	6 1/2 (165)	1 5/8 (41)	2 5/8 (67)
B SQ	05 (125)	06 (150)	07 (180)	08 (205)																																																																													
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)																																																																													
MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																													
MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																																													
SUFFIX	L	M	N	P	R	T																																																																											
B x B'	4 1/2 (115)	4 1/2 (115)	5 (125)	5 (125)	6 (150)	5 (125)																																																																											
H	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	3 (76)	2 1/4 (57)	3 (76)																																																																											
MIN	1 3/8 (35)	1 7/8 (48)	1 3/8 (35)	2 1/8 (54)	1 3/8 (35)	2 1/4 (57)																																																																											
MAX	2 3/8 (60)	2 3/4 (70)	2 3/8 (60)	3 (76)	2 3/8 (60)	3 1/8 (79)																																																																											
SUFFIX	B	C	D	X																																																																													
				MIN	MAX																																																																												
-V	3 1/2 (89)	3 1/2 (89)	4 1/2 (115)	1 5/8 (41)	2 5/8 (67)																																																																												
-W	6 3/4 (170)	6 3/4 (170)	6 1/2 (165)	1 5/8 (41)	2 5/8 (67)																																																																												
EXTENSION ADAPTOR FUNCTION: Used when a strainer head must be raised to accommodate deeper floor fill. REGULARLY FURNISHED: Duct Cast Iron -CI MATERIALS: Cast Bronze -CB Galvanized Cast Iron -G  SUFFIX -X NOTE: Extension can be stacked for increased maximum adjustment.	OVERFLOW WITH STANDPIPE FUNCTION: Used as overflow drain in decorative pools, fish ponds or similar areas. Dome prevents floating objects from entering drain line.  <table border="1" style="width: 100%; font-size: x-small;"> <tr><th>SUFFIX</th><th>A SIZE</th><th colspan="2">X</th></tr> <tr><td></td><td></td><td>MIN</td><td>MAX</td></tr> <tr><td>-Y</td><td>2 (51)</td><td>3/4 (19)</td><td>2 1/8 (54)</td></tr> <tr><td>-Z</td><td>3 (76)</td><td>3/4 (19)</td><td>2 1/8 (54)</td></tr> </table> SUFFIX -Y-Z Specify Type, Size & Finish eg: YCP, ZCP MATERIALS: Chrome Plated -CP Nickel Bronze -NB Polished Bronze -PB VARIATIONS: Less Dome -LD Standpipe Height other than 6" (150) (Specify Height)	SUFFIX	A SIZE	X				MIN	MAX	-Y	2 (51)	3/4 (19)	2 1/8 (54)	-Z	3 (76)	3/4 (19)	2 1/8 (54)	HEAVY DUTY ADJUSTABLE FUNCTION: Used in finished floors where light wheeled loads and or heavy foot traffic are anticipated.  SUFFIX -69 MATERIALS: Polished Bronze -PB Rough Bronze -RB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -69V) Sediment Bucket -B Vandal Proof Screws -U eg: A06NB-69																																																															
SUFFIX	A SIZE	X																																																																															
		MIN	MAX																																																																														
-Y	2 (51)	3/4 (19)	2 1/8 (54)																																																																														
-Z	3 (76)	3/4 (19)	2 1/8 (54)																																																																														
 Fig. 3580	 Fig. 3581	 Fig. 3590	 Fig. 3591																																																																														
FIGURE NUMBER	REV. L 7-29-19 K 10-20-17 J 1-17-12 H 8-24-99 G 6-11-99	DESCRIPTION Added Load Rating(s) Rev. Materials Suffix -H, -V-W Rev. Variations of Suffix -J Revised Revised Tables	BY MW TBW TBW TBW CMD CMD	CKD. BY	FIGURE NUMBER 2010 SERIES OPTIONAL STRAINER HEADS 2 of 2																																																																												

NOTE: Dimensions shown in parentheses are in millimeters.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov