


FLOOR DRAINS

WITH 8 1/2" (215) ROUND TOPS

MEDIUM DUTY DRAINS

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
14.25 SQ IN
(92) SQ CM

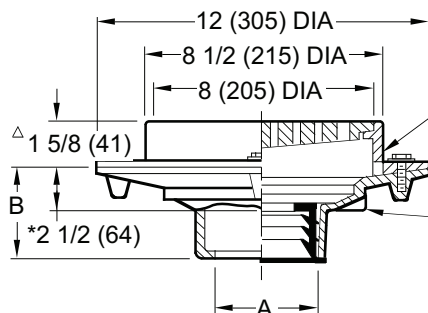

- Seepage Openings

Collar Can Be Used
As Flashing Clamp
(When Required)

— Trap Primer
Connection
(When Specified)

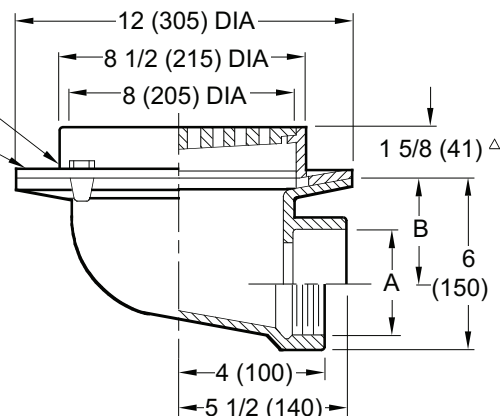


Fig. 2115C . . . CAULK OUTLET
Fig. 2115T . . . THREADED OUTLET

Fig. 2110C . . . CAULK OUTLET

Fig. 2110T . . . THREADED OUTLET

**** Fig. 2110Y . . . NO-HUB OUTLET**

A SIZE	02 (50)	03 (75)	04 (100)	05 (125), 06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set®, 2 (51) for Threaded			3 3/4 (95) NO-HUB Only

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar
with Cast Iron Slotted ADA Grate.

VARIATIONS:

- ☐ Closure Plug -XP (Fig. 2110 only)
- ☐ Dome Grate -D
- ☐ Flat Bottom Strainer -FBS
(Fig. 2110 only)
- ☐ L Speedi-Set® Service Weight
(Fig. 2110 only)
2(50), 3(75) & 4"(100) sizes only
- ☐ LXH Speedi-Set® Extra Heavy
(Fig. 2110 only)
2(50), 3(75) & 4"(100) sizes only
- ☐ NO-HUB Adaptor (Specify Fig. 2646Y)
(Fig. 2115 only)
- ☐ Sediment Bucket -B
- ☐ Square Top -S
- ☐ Trap Primer Connection -P050 1/2"(13)
& -P075 3/4"(19)
- ☐ Vandal Proof Grate -U
- ☐ Wide Flange Deck Drain
(Specify Fig. DX2565)
- ☐ Quad Close Trap Seal
(Specify Fig. 2692) (Fig. 2110 Only)
- ☐ Heel Proof Grate -Q45

OPTIONAL MATERIALS:

- ☐ Ductile Iron Grate -M
☐ Galvanized Cast Iron -G
☐ Nickel Bronze Top -NB
☐ Polished Bronze Top -PB
☐ Stainless Steel (Specify
 Fig. 9710)

[△] Add 3/16" (5) when bronze top is specified.

*This dimension to internal stop of Speedi-Set® gasket.

****Meets U.S. Gov't Spec. per WW-P-541-b,
Type 220, 02 (50) and 03" (75) sizes only.
See Fig. 2130 for 04" (100) size.**

**Meets ANSI Spec A112.6.3-2001
02(50), 03(75) or 04"(100) sizes only.**

▲Not available on Fig. 2110T threaded outlet drain.

NOTE: Dimensions shown in parentheses are in millimeters.

S R Q P	7-21-26 7-15-24 3-10-23 1-23-23	Revised Text Revised Variations and Fig. Opts. Added ® to "Speedi-Set" Added ADA	TB HS KK KK	CL KV CL JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2110, 2115
REV.	DATE	DESCRIPTION	BY	CKD. BY			

