


FIGURE NUMBER	SQ-8-2180	DRAWN BY: CMD	CHECKED BY: JM	APPROVED BY: McD	DATE: 8-30-98	SCALE: NONE	SIZE: A	DRAWING NUMBER SSQ-8-2180	A	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com  MEMBER OF:	LOCATION																																																					
										LARGE ANIMAL FUR/HAIR INTERCEPTORS																																																						
										FUNCTION: Installed in waste line serving a kennel grooming area to intercept animal fur/hair to eliminated potential stoppage.																																																						
																																																																
										C = Body Width X = Specify Additional Height Required NOTE: It is the responsibility of the installer to check all parts (internal and external) to verify they are in their proper operating order and location. <table><tr><th rowspan="3">Fig. No.</th><th rowspan="3">GPM Flow Rate</th><th rowspan="3">* Inlet & Outlet Size</th><th colspan="5">Dimensions</th><th rowspan="3">Securing Screws In Cover</th></tr><tr><th colspan="2">Body</th><th colspan="3">Roughing Dimensions</th></tr><tr><th>Length</th><th>Width</th><th>D</th><th>E</th><th>F</th></tr><tr><td>SQ-8-2180</td><td>10</td><td>03 (75)</td><td>20 (510)</td><td>24 (610)</td><td>12 (305)</td><td>12 (305)</td><td>8 (205)</td><td>8</td></tr><tr><td>SQ-8-2180</td><td>20</td><td>03 (75)</td><td>30 (760)</td><td>24 (610)</td><td>12 (305)</td><td>12 (305)</td><td>8 (205)</td><td>8</td></tr><tr><td>SQ-8-2180</td><td>25</td><td>04 (100)</td><td>36 (915)</td><td>24 (610)</td><td>12 (305)</td><td>12 (305)</td><td>8 (205)</td><td>8</td></tr><tr><td>SQ-8-2180</td><td>50</td><td>04 (100)</td><td>40(1015)</td><td>26 (660)</td><td>12 (305)</td><td>12 (305)</td><td>8 (205)</td><td>10</td></tr></table> *Specify larger or smaller inlets/outlets as required. NOTE: Dimensions shown in parentheses are in millimeters. REGULARLY FURNISHED: Fabricated Steel with Gray Duco Coating and Stainless Steel Mesh Bucket, Stainless Steel Secondary Screen, 3/16" (5) Diamond Plate Cover (Secured & Gasketed) and Threaded Inlet and Outlet. VARIATIONS; ☐ All Stainless Steel Unit -SS ☐ Anchor Flange -F ☐ Extension -E Specify height eg: -E06 for 6"(150) Ext ☐ Flashing Flange with Flashing Clamp -F-C ☐ NO-HUB Inlet & Outlet Connection ☐ Option (2) 2" (51) Threaded Vent Connections - VC										Fig. No.	GPM Flow Rate	* Inlet & Outlet Size	Dimensions					Securing Screws In Cover	Body		Roughing Dimensions			Length	Width	D	E	F	SQ-8-2180	10	03 (75)	20 (510)	24 (610)	12 (305)	12 (305)	8 (205)	8	SQ-8-2180	20	03 (75)	30 (760)	24 (610)	12 (305)	12 (305)	8 (205)	8	SQ-8-2180	25	04 (100)	36 (915)	24 (610)	12 (305)	12 (305)	8 (205)
Fig. No.	GPM Flow Rate	* Inlet & Outlet Size	Dimensions					Securing Screws In Cover																																																								
			Body		Roughing Dimensions																																																											
			Length	Width	D	E	F																																																									
SQ-8-2180	10	03 (75)	20 (510)	24 (610)	12 (305)	12 (305)	8 (205)	8																																																								
SQ-8-2180	20	03 (75)	30 (760)	24 (610)	12 (305)	12 (305)	8 (205)	8																																																								
SQ-8-2180	25	04 (100)	36 (915)	24 (610)	12 (305)	12 (305)	8 (205)	8																																																								
SQ-8-2180	50	04 (100)	40(1015)	26 (660)	12 (305)	12 (305)	8 (205)	10																																																								
REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER SQ-8-2180																																																									

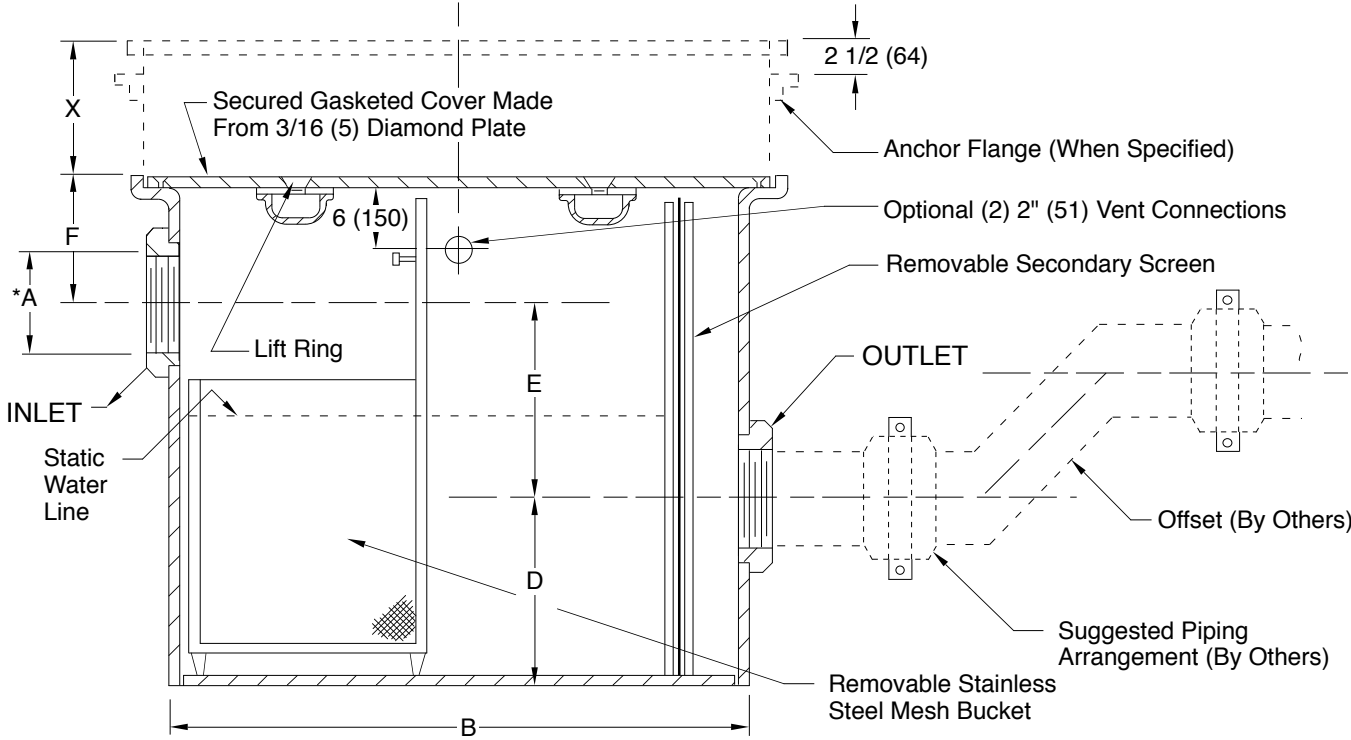

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov