


Series 0209FXL

LEAD-FREE DIELECTRIC UNION (FIP x SOLDER)




- California AB1953 lead-free approved
- Meets federal Safe Water Drinking Water Act, lead-free requirement
- Prevents electrolysis
- Full flow
- Forged carbon steel nut, zinc plated
- Forged carbon steel IPS connections, zinc plated
- Working pressure 300 psi @ 150°F
- High temperature washer available



1/2" to 2"

No.	Part	Material
1	FIP Adapter	Steel
2	Insulator	Nylon
3	Washer	EPDM
4	Coupling Nut	Steel
5	FIP Adapter	Steel

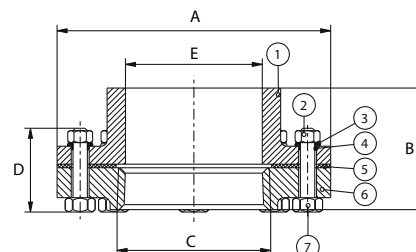

2-1/2" to 4"

No.	Part	Material
1	Nut	Forged Carbon Steel ASTM A197
2	Insulator	Nylon + Fiberglass Grilon TV-3H
3	Solder Connection	Brass ASTM B-124, C37700
4	Washer	EPDM
5	FIP Inlet	Forged Carbon Steel ASTM A197
6	Body	Cast Iron, JIS FC25
7	Solder Joint	Cast Brass, ASTM C85710
8	Bolt	Steel, AISI 1010
9	Nut	Steel, AISI 1010

Size IN	Part Number	Weight LB	A IN	B IN	C IN	D IN	E IN
1/2	0209FXGL	0.346	1.63	1.04	0.72	1.85	0.82
3/4	0209FXIL	0.434	1.85	1.26	0.72	2.03	1.07
3/4 x 1/2	0209FXIGL	0.43	1.85	1.26	0.72	1.89	0.82
1	0209FXKL	0.59	2.14	1.54	0.73	2.26	1.31
1-1/4	0209FXLL	0.86	2.56	1.86	0.85	2.52	1.57
1-1/2	0209FXML	1.42	2.95	2.15	0.97	2.53	1.83
2	0209FXNL	2.67	3.76	2.73	1.06	2.85	2.54
2-1/2	0209FXPL	13.22	2.63	3.03	5.82	5.78	0.74
3	0209FXQL	15.65	3.13	3.74	6.83	6.77	0.74
4	0209FXTL	29.76	4.13	4.64	6.83	6.77	0.74