



Deluxe

Framed sliding shower door

5976-59

Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Towel bar.
- Tempered glass ensures maximum safety and durability.

Material

- Anodized aluminum prevents rust and corrosion.

Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1

CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------




S	Silver
---	--------

Available Glass Options

Code	Description
------	-------------

	Rain
--	------

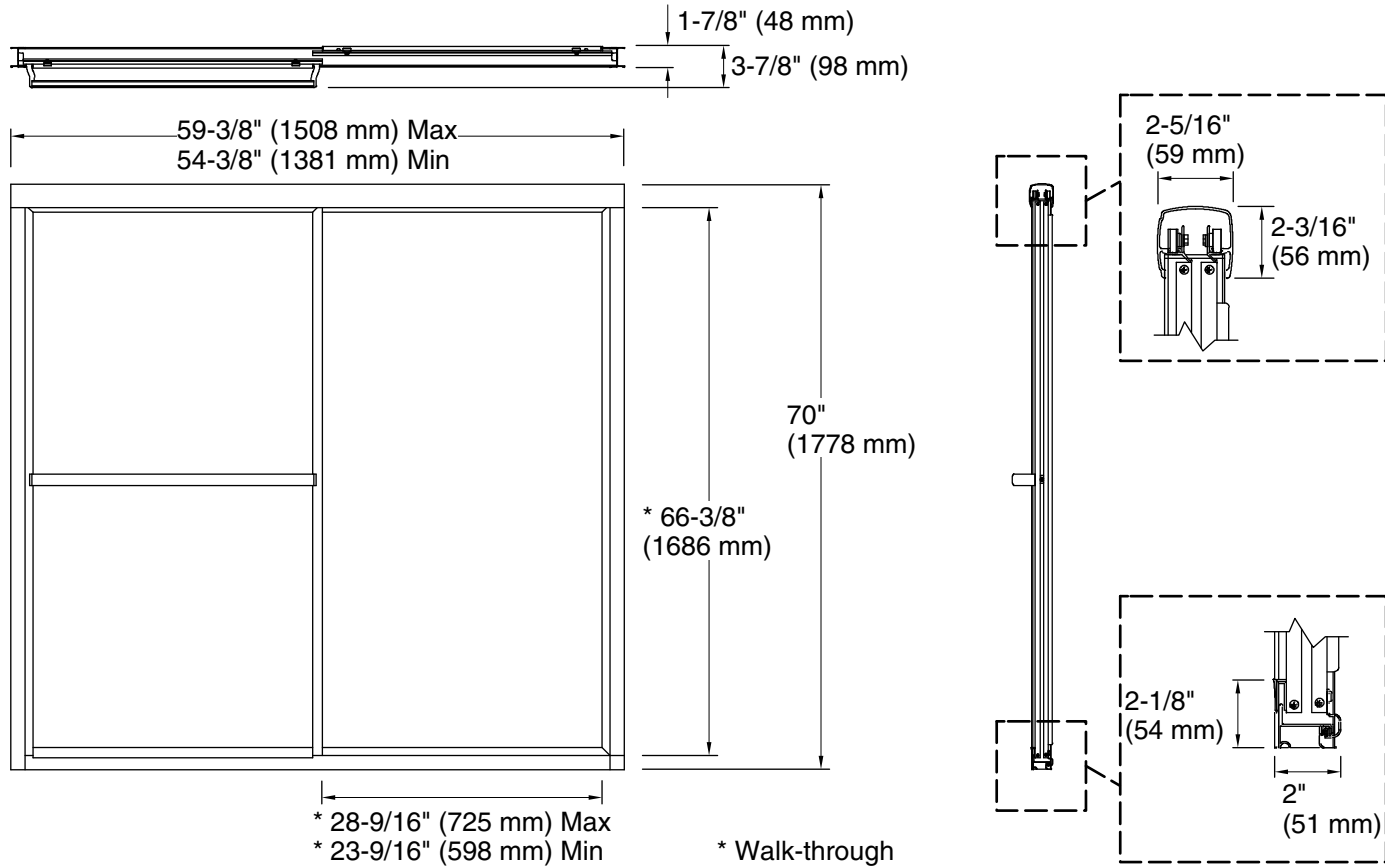

Technical Information

All product dimensions are nominal.

Installation type:	For shower base installation
Opening Width - Min:	54-3/8" (1381 mm)
Opening Width - Max:	59-3/8" (1508 mm)
Walk-through - Min:	23-9/16" (598 mm)
Walk-through - Max:	28-9/16" (725 mm)
Base-To-Wall Radius - Max:	1/2" (13 mm)
Glass thickness:	1/8" (3 mm)

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 71-3/8" (1813 mm) to allow for installation clearance.