



# Accord® Tile

60" x 30" Vikrell® bath/shower with Aging in Place  
backerboards, left above-floor drain  
**71140118**



## Features

- 17-1/4 (438 mm) apron
- Pivot snap-together modular design
- Smooth, high-gloss walls
- Molded-in shelves
- Aging in Place backerboards
- 3" (76 mm) drain-to-floor clearance for above-floor drain installation

## Material

- Made from solid Vikrell® material for strength, durability, and lasting beauty

## Installation

- Alcove
- Left drain
- Caulk-free installation

## Recommended Products/Accessories

K-23726 Drain treatment

## Included Components

71144106 60" x 30" Vikrell® bath/shower wall set with Aging in Place backerboards  
71141118 60" x 30" Vikrell® bath, left above-floor drain




## Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
HUD, UM Bulletin 73

## STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty

See website for detailed warranty information.

**Accord® Tile**  
60" x 30" Vikrell® bath/shower with Aging in Place  
backerboards, left above-floor drain  
**71140118**

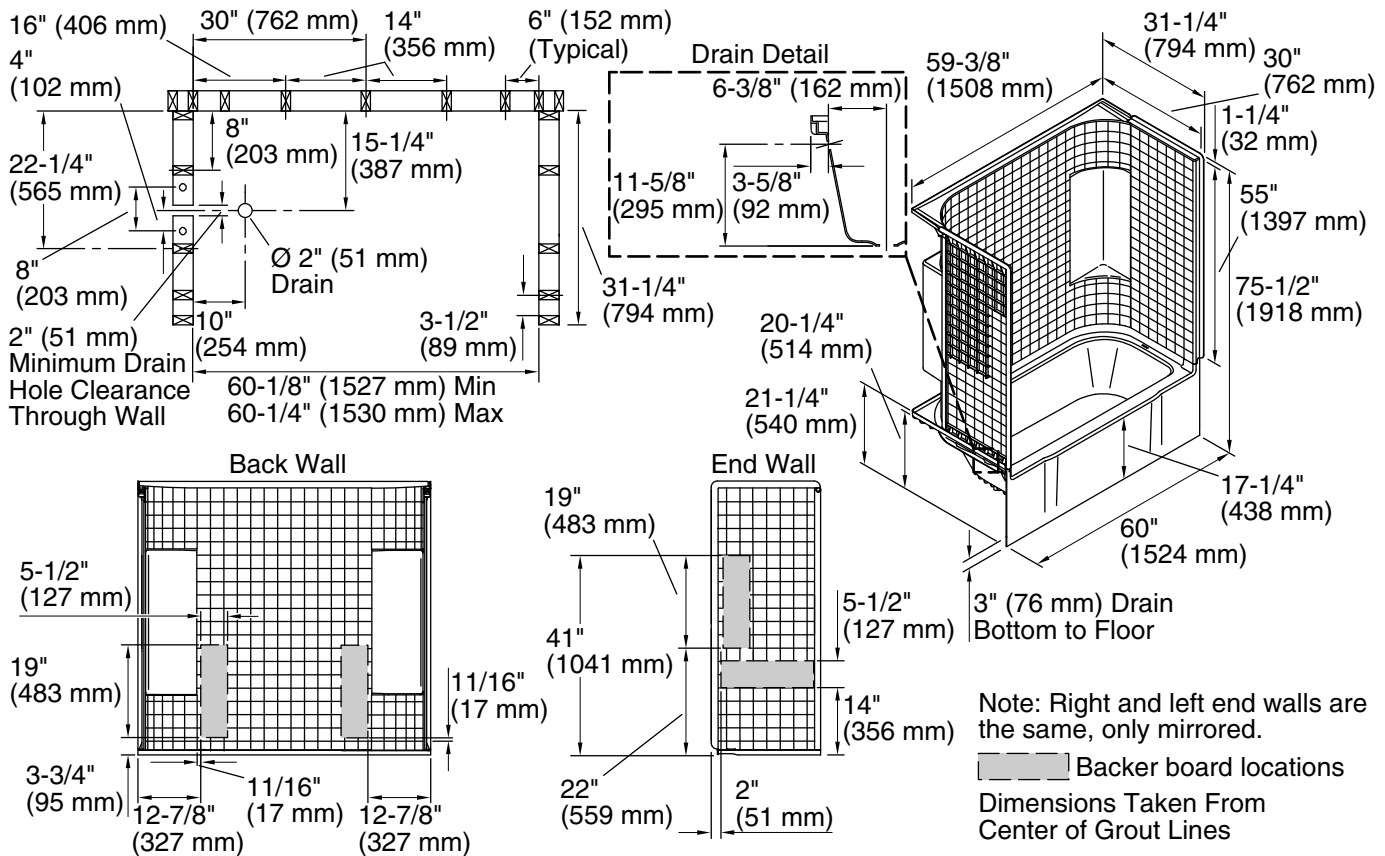

**Technical Information**

All product dimensions are nominal.

|                        |                                      |
|------------------------|--------------------------------------|
| Drain location:        | Left                                 |
| Basin area, bottom:    | 46-1/4" x 20-1/2" (1175 mm x 521 mm) |
| Basin area, top:       | 52-1/4" x 22-1/2" (1327 mm x 572 mm) |
| Water depth:           | 11" (279 mm)                         |
| Water capacity:        | 34 gal (128.7 L)                     |
| Minimum flat for door: | 2-3/4" (70 mm)                       |
| Maximum door height:   | 56-1/2" (1435 mm)                    |
| Maximum door width:    | 56-3/4" (1441 mm)                    |

**Notes**

Install this product according to the installation instructions.

Product is designed to be used with a single-hole mixer valve with an escutcheon cover not to exceed 7-3/4" (197 mm) in width.

Studs should be positioned roughly as shown.

Bath cannot be installed without the wall surround.

Attach grab bars at the specified backerboard locations only.

Width shifts from 60" (1524 mm) at front to 59-3/8" (1508 mm) at back. Use 1/4" (6 mm) furring strips at back for drywall over nailing-in flange installation.

ADA adaptable when grab bars and seat are installed per the specific requirements of these regulations.

For future ADA compliance, select a mixing valve location that will not interfere with a control wall grab bar.