



# STORE+®

## 60" x 32" Vikrell® bath/shower, right above-floor drain

### 71420122



### Features

- Tongue-and-groove modular design allows for easy installation during any phase of construction
- Includes four rimmed shelves, two caddies, two hooks, and two soap dishes with towel bar
- Dishwasher-safe shelves and bins snap into place; no tools required
- Holds up to 30 bottles
- Easy-to-clean, durable high-gloss finish
- Innovative Dry-Block™ seal and channeled water containment system form watertight seams

### Material

- Compression-molded from our exclusive solid Vikrell® material

### Installation

- Alcove
- Caulk-free installation
- Above-floor-drain (AFD) rough-in
- Right drain

### Recommended Products/Accessories

K-23726 Drain treatment

### Included Components

71121122 60" x 32" Vikrell® bath, right above-floor drain  
71424100 60" x 32" Vikrell® bath/shower wall set



### Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
HUD, UM Bulletin 73

### STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

|                                                                                     |   |       |
|-------------------------------------------------------------------------------------|---|-------|
|  | 0 | White |
|-------------------------------------------------------------------------------------|---|-------|

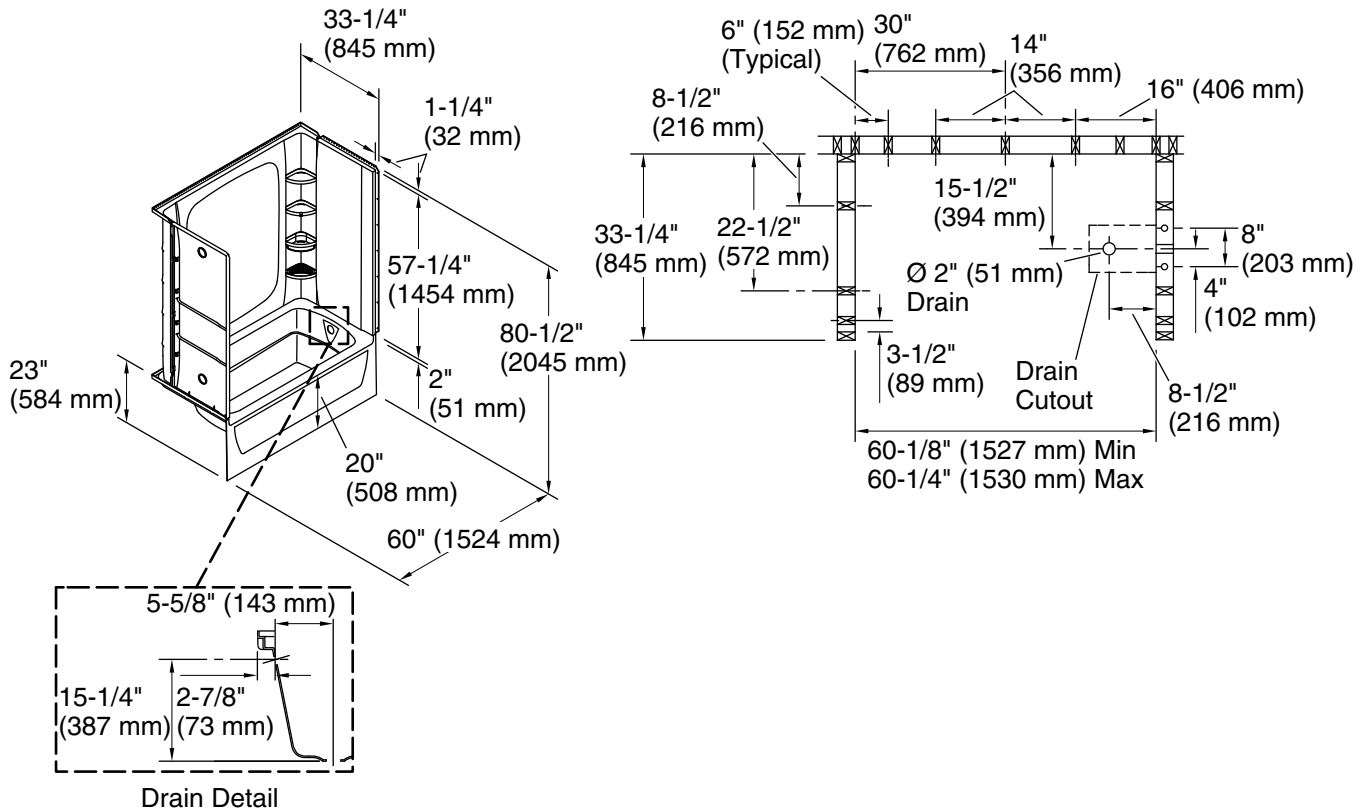

## Technical Information

All product dimensions are nominal.

|                        |                              |
|------------------------|------------------------------|
| Drain location:        | Right                        |
| Basin area, bottom:    | 42" x 20" (1067 mm x 508 mm) |
| Basin area, top:       | 54" x 26" (1372 mm x 660 mm) |
| Weight:                | 143 lbs (64.9 kg)            |
| Water depth:           | 13-3/4" (349 mm)             |
| Water capacity:        | 51 gal (193.1 L)             |
| Minimum flat for door: | 3" (76 mm)                   |
| Maximum door height:   | 59" (1499 mm)                |
| Maximum door width:    | 57-11/16" (1465 mm)          |

## Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.