




Location:

7-1000 Thermostatic Mixing Valve Specification Submittal

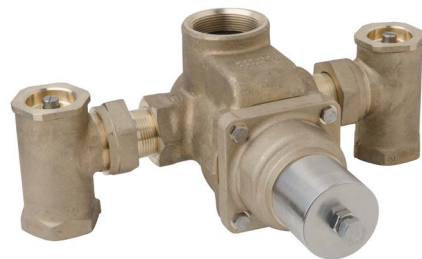




Specification	Modifications
TempControl thermostatic mixing valve made from lead free** metal components. Features serviceable integral check stops (see table 1 for flow rates). Temperature control range: 70°F - 150°F (21.1°C - 65.6°C) Approach temperature: 5°F (-15°C) **According to US Senate bill S.3874, the term "lead free" is defined as follows: "not more than a weighted average of 0.25 percent lead when used with respect to the wetted surfaces of pipes, pipe fittings, plumbing fittings, and fixtures"	☐ -NI Rough nickel finish ☐ -P Polished chrome highlight finish ☐ -W Wall mounting bracket Note: Append appropriate -suffix to model number.
	Coordinating Model Numbers
	☐ T-425-1000 3" bimetal dial thermometer ☐ BV-1000 Volume control shut-off valve ☐ SV-1000 Solenoid valve ☐ TF-1000 Tee fitting ☐ WHA-1 Water hammer arrestor
Compliance	Warranty
-ASME A112.18.3/CSA B125.3-12 -ASSE 1017 -NSF/ANSI 61.9, NSF/ANSI 372	 Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.

Flow Rate Chart

TABLE 1: FLOW RATE - gpm (L/min)								
VALVE MODEL	MIN. FLOW RATE*	MIN. FLOW RATE	PRESSURE DIFFERENTIAL - psi (kPa)					
			5 psi (34 kPa)	10 psi (69 kPa)	20 psi (138 kPa)	25 psi (172 kPa)	30 psi (207 kPa)	45 psi (310 kPa)
7-1000	0.5 gpm (1.9 L/min)	13 gpm (49 L/min)	38 gpm (144 L/min)	67 gpm (254 L/min)	100 gpm (379 L/min)	111 gpm (421 L/min)	120 gpm (455 L/min)	140 gpm (531 L/min)

*Minimum flow rate when valve is installed at or near the hot water source with recirculated tempered water and continuously operating circulating pump.

Dimensions

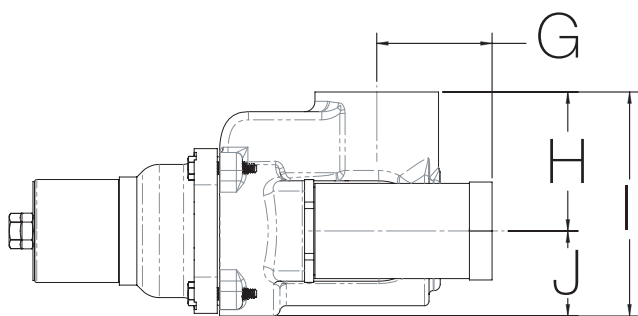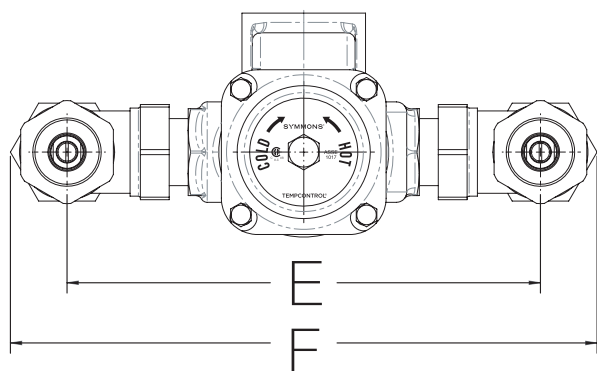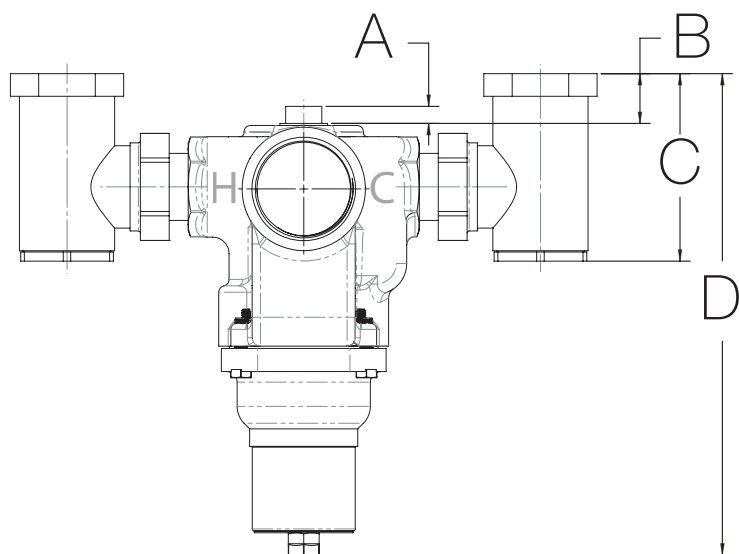

TempControl Valve Sizes		
Model No.	Inlet	Outlet
7-1000	1-1/2"	2"
Measurements		
A	7/16", 11 mm	
B	1-3/16", 31 mm	
C	4-9/16", 116 mm	
D	11-3/8", 289 mm	
E	11-1/2", 296 mm	
F	14-1/4", 365 mm	
G	2-13/16", 71 mm	
H	3-3/8", 86 mm	
I	5-7/16", 138 mm	
J	2-1/16", 52 mm	

Note: Dimensions subject to change without notice.