




Architect/Engineering Specifications:

Flexible supply assembly with polished chrome plated brass body and loose key angle stop, 3/8" O.D. x 12" flexible copper tube, 1/2" NPT female inlet and Ø 2 1/2" wall flange. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name		
Model Specified		Quantity
Variations Specified		
Date		

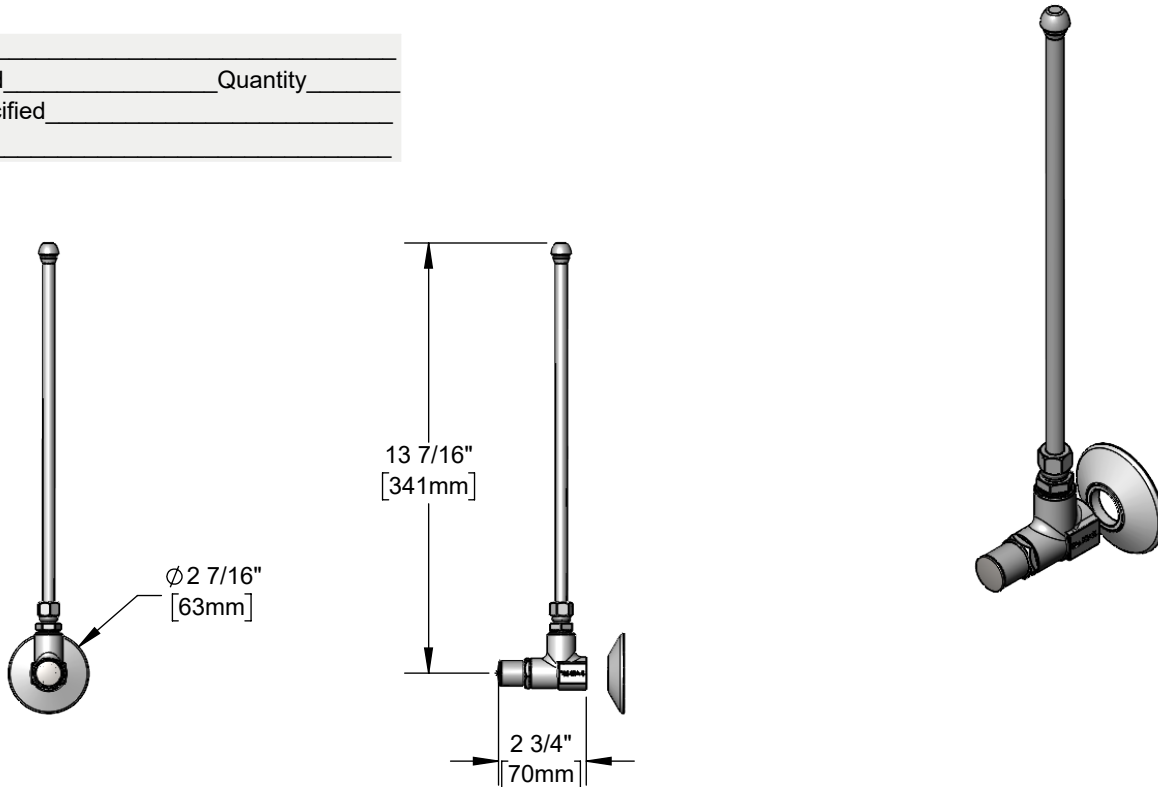

Features & Benefits:

- Flexible supply assembly with polished chrome plated brass body
- 3/8" O.D. x 12" flexible copper supply tube
- Loose key angle stop w/ handle and screw
- 1/2" NPT female inlet
- Ø 2 1/2" wall flange
- Material: Polished chrome plated brass body, chrome plated metal wall flange & copper supply tube

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate: TBD GPM [TBD L/min] @ 60 psi [4.14 bar]

