



Washdown Stations

MV-1907-11CW


TAG:

Single Temperature Valve

Architect/Engineering Specifications:

Single chrome plated washdown station w/ 1/2" globe valve, thermometer, 50' hose, rear trigger water gun, wall brackets, hose swivel & hose rack.

Job Name	_____
Model Specified	_____ Quantity _____
Variations Specified	_____
Date	_____

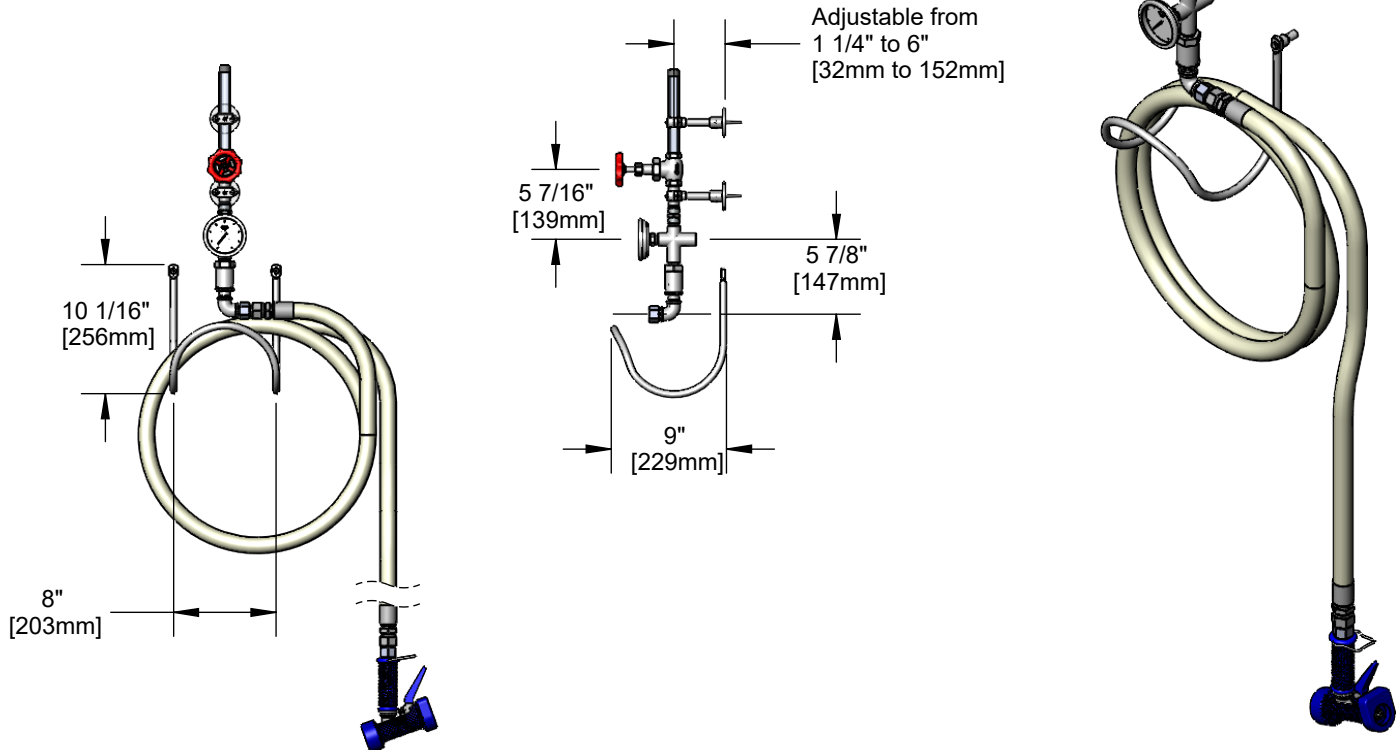

Features & Benefits:

- 1/2" globe valve w/ color coded handle
- Chrome plated brass thermometer tee
- Stainless steel thermometer, temperature range 0°F - 200°F
- 50' x 3/4" I.D. white creamery hose
- Rear trigger stainless steel water gun w/ rubber cover
- 1/2" hose swivel
- Stainless steel hose rack w/ mounting hardware
- Material: Chrome plated brass valve, stainless steel thermometer and rubber hose

Product Compliance:

- NSF 61 Exempt (Non-Potable)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 200°F [4.44°C - 60°C]
- Flow Rate: 6.99 GPM [26.46 L/min] @ 60 psi [4.14 bar]



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 11/20/24