




Thermaflex®

**S-LD Non-Insulated Flexible Air Connector
for All Pressure Systems**

CODES/STANDARDS		Listed and labeled by Underwriters' Laboratories, Inc., as a Class I Air Duct, Standard 181. It complies with the latest NFPA Bulletins 90A and 90B. Meets FHA and other U.S. government agency standards. Flame spread: not over 25. Smoke developed: not over 50.											
FABRIC TYPE		Foil reinforced film laminate.											
TEMPERATURE RANGE		-20° F to 250° F.											
SIZES, ID		2	3	4	5	6	7	8	9	10	12	14	
LENGTH (feet)		25 ft.											
INSIDE BEND RADIUS (inches)		2	3	4	5	6	7	8	9	10	12	14	
STEEL WIRE		Coated spring steel wire helix											
RATED VELOCITY		5000 fpm											
MAX RATED PRESSURE (inches water column)	POSITIVE	All Sizes – 10" w.g.											
	NEGATIVE	All Sizes – 1" w.g.											

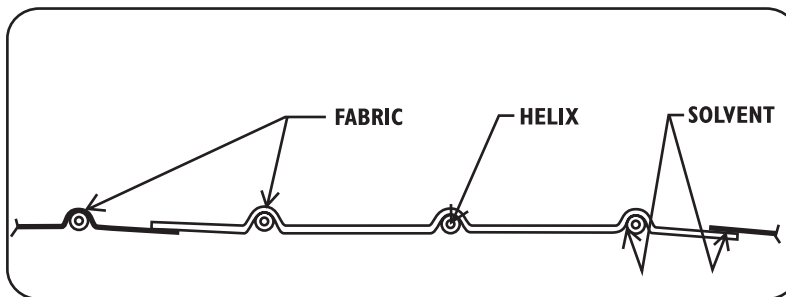

JOB _____
LOCATION _____
ENGINEER _____
CONTRACTOR _____
Certified Correct
BY _____
TITLE _____
DATE _____

P.O. NO. _____
JOB NO. _____
REPRESENTATIVE _____
Approved for Construction
BY _____
TITLE _____
DATE _____

THERMAFLEX®

A Division of Flex-Tek Group, a subsidiary of Smiths Group plc.

NATIONAL SALES HEADQUARTERS
P.O. Box 927 (381 Carwellyn Rd.)
Abbeville, SC 29620
800-459-4822

CANADA
4610 Eastgate Pkwy, Unit 3
Mississauga, Ontario L4W 3W6
905-602-9660

