


Loretta 4





Features an integrated slotted overflow

MODEL 266	
60" x 32" x 21.5"	
FREESTANDING 69 gal to overflow	
Acrylic CXL®	DoloMatte®
123 lbs / 56 kg	<SOAKER> 138 lbs / 63 kg
Filling this tub to the maximum may require an above average size or dedicated water heater.	

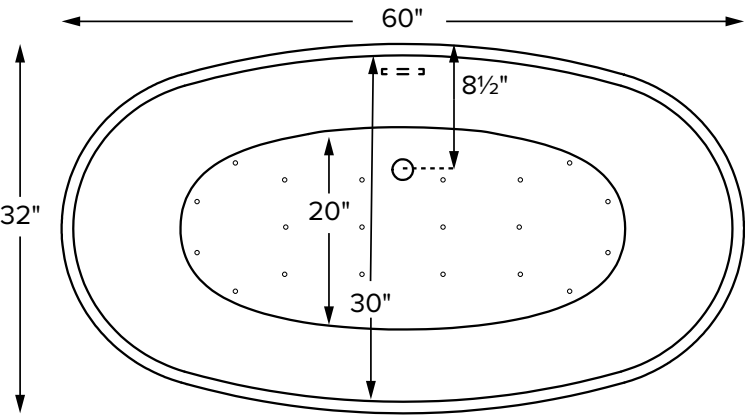

Shown with Air Massage Package.

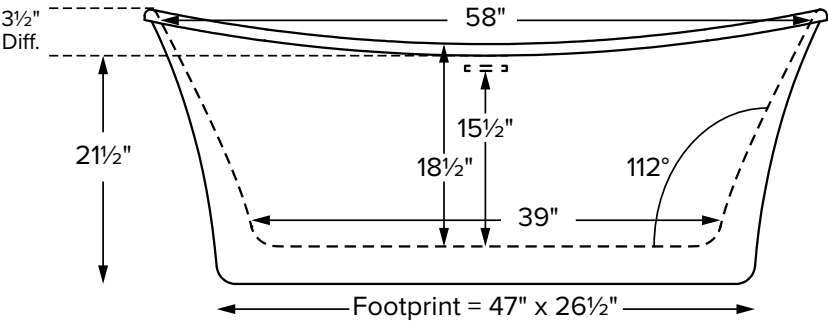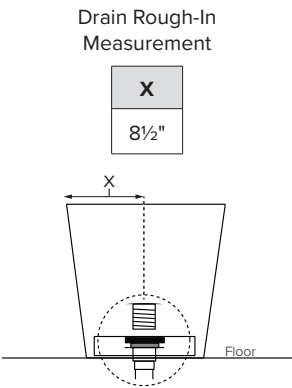

ELECTRICAL COMPONENTS & SPECIFICATIONS

Hydrotherapy Package	Components Included	110V GFCI
Air Massage	heated blower	1-15 amp
Air Massage Elite	heated blower, chromatherapy	1-15 amp
Electrical requirements may change with the addition of optional therapy components. See specific option details or installation information. CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7		

See the Installation & Operation Manual for more details.
MTI's Customer Service: Monday-Friday 8am-6pm EST
800-783-8827 or service@mtibaths.com

- Before discarding tub packaging, check for accessories that may be packaged inside.
- All product measurements are $\pm 1/2$ ".
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to equipment.
- Comes equipped with an access panel on the drain side for installation of toe tap drain.
- This tub cannot be ordered without an access panel.
- Air baths require job site preparations for remote mounting the blower and required check valve. Check valve must be installed higher than the rim of the tub.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- Radiance placed on floor locations will affect placement of air jets.
- Faucet valves cannot be installed on this tub model.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.



- Airbath blower and keypad ship loose for remote installation on site.
- Secondary remote check valve must be installed higher than the rim of the tub.
- See the Installation & Operation Manual for more details.

Loretta 4

MODEL 266

60" x 32" x 21.5"

Hydrotherapy Packages	Package Contents	Acrylic CXL®		DoloMatte®	
		Part #	MSRP	Part #	MSRP
Soaker	Soaking bath - no jets; includes a pre-leveled foam base and integrated slotted overflow with toe-tap drain kit in chrome.	S266	\$5,900	S266DM	\$6,640
Air Massage	20 air jets, heated air blower, pre-leveled foam base and integrated slotted overflow with toe-tap drain kit in chrome. Blower, control boxes, and keypad must be remote located.	AST266	\$9,285	AST266DM	\$10,025

RECOMMENDED SENSORY THERAPIES

Thermaltherapy
(RAD100) **\$1,675** Radiance®
2 heated zones included

Options <i>Must be ordered at time of purchase</i>
Standard Colors White (CWH) DoloMatte available in matte white only. Biscuit (CBS) Not available for DoloMatte.
Quick Ship reduces lead time (QSPRI) \$450 <i>Please call for availability</i>
Textured Bottom (TXTBTM) Acrylic CXL® only \$110 DoloMatte® exceeds ANSI A137.1/A326.3 and AS HB198 slip tests.

Accessories	
Pillows from \$190	
Teak Bath Mat (TKMAT3018) \$840 <i>Custom sizes also available. Contact MTI for details and pricing.</i>	
Teak Tub Tray Slatted (TK-TRAY1) \$515 Solid (TK-TRAY2) \$585	
Floor-Mounted High-Flow Tub Filler Contemporary Brushed Nickel (FILLBN) \$1,795	
Faucet Stand SculptureStone® Standard	
Small 3-hole capacity 14¼" w x 21¾" h Matte (STAND) \$745	Large 5-hole capacity 22" w x 21¾" h Matte (STANDL) \$880
+\$420 gloss finish upcharge (SSGLOSSENK)	

Drains & Overflow Kits *Must be ordered at time of purchase*

Integrated Overflow with Toe Tap Slotted Overflow PVC drain - Chrome (SLOTIOC) included Finish Upcharge White (SLOTIOWHU) \$70 Brushed Nickel (SLOTIOBNU) \$70 Polished Nickel (SLOTIOPNU) \$110	Brass Tailpiece (WIOBS) \$90 <i>May be ordered separately</i>	Quick Connect Drain - (WOQ) \$485
--	--	---