

Your Analyzer, Your Way!

Backed by UEi Service+

Up to 6-Year Warranty



— BACKED BY —
UEi
SERVICE+

6
YEAR
WARRANTY

-24^{HR}
SERVICE


**FREE
SHIPPING**

UEi SERVICE+

Complete Care for your Combustion Analyzer



6 Year Warranty: All UEi combustion analyzers have a standard 1-year warranty. Each recertification includes a 30-point inspection and extends the warranty for 1 more year for up to 6 years from the date of purchase.

Contractors who book recertification of a C160 series analyzer at www.ueitest.com/service within 12 months from either the date of purchase or the date of the last recertification will receive reduced service pricing that lowers the cost of ownership and 2 additional benefits:

24-hour Service: We guarantee that all analyzers received for standard recertification and service through UEi Service+ are returned on the next business day.

Free Shipping: UEi Service+ offers free shipping both to and from our service center. When customers book their recertification, they receive a prepaid UPS Ground shipping label.

That's UEi Service+!

See complete details at ueitest.com/service

RESIDENTIAL / COMMERCIAL COMBUSTION ANALYZERS

**YOUR
ANALYZER,
YOUR
WAY!**



RESIDENTIAL  COMMERCIAL

	C161	C163	C165+
UPC	053533508338	053533508352	053533509151
CO2/CO/Differential Temperature	Measured	Measured	Measured
O2, Efficiency, Excess Air, CO/O2	Calculated	Calculated	Calculated
Differential Pressure		Measured	Measured
NOx Protected CO Sensor	•	•	•
High Altitude Compensation	•	•	•
Heat Exchanger Test	•	•	•
Wireless link to Printer App		•	•
Purge Pump Protection for CO Sensor		•	•
H2 compensated 10,000ppm CO Sensor			•
LINK to Wireless Probes			•
Flow & Return Pipe Clamp Probes (2)			•
Printer	Available Option	Available Option	Available Option
Factory Installed NO Sensor			Available Option

See pages 4 - 8 for Analyzer details and available kits

Confirm installation and maintenance to factory standards

Cut back on Carbon Monoxide risks

Control fuel costs

DESIGNED BY
MADE BY
USi

COMBUSTION

AVAILABLE OPTIONS C165+



	C165+	C165+KIT	C165+OIL	C165+OILKIT
UPC	053533509151	053533509168	053533509182	053533509212
Analyzer/Probe	•	•	•	•
Batteries/Charging Cable	•	•	•	•
Carrying Case	•	•	•	•
K-type Temp Probes/Spare Filter	•	•	•	•
Tubing Kit	•	•	•	•
Printer/Spare Paper Roll		•		•
Smoke Pump Test Kit			•	•

AVAILABLE OPTIONS FOR C165+ W/ NITRIC OXIDE (NO) SENSOR



	C165+N	C165+NKIT	C165+NOIL	C165+NOILKIT
UPC	053533509175	053533509205	053533509199	053533509229
Analyzer/Probe	•	•	•	•
Batteries/Charging Cable	•	•	•	•
Carrying Case	•	•	•	•
K-type Temp Probes/Spare Filter	•	•	•	•
Tubing Kit	•	•	•	•
Printer/Spare Paper Roll		•		•
Smoke Pump Test Kit			•	•

C165+ UPC: 053533509151

Residential/Commercial Combustion Analyzer



BACKED BY
UEi
SERVICE+

6
YEAR
WARRANTY

24
HR
SERVICE

FREE
SHIPPING



Measures

- CO
- CO2
- Differential Pressure
- Flue and Inlet Temperature

Calculates

- Differential Temperature
- Efficiency (Net, Gross)
- Excess Air

Features

- Up to 6-Year warranty with annual recertification
- Eligible for UEi Service+
- LINK to wireless probes
- Wireless Flow and Return Probes
- NOx filtered & H2 Compensated CO sensor (10,000ppm range)
- 3 levels of sensor protection
- Over-range protection pump
- NOx filtered CO sensor
- Low Flow Detection
- Compatible with DTHA2

Pre-Programmed Fuels

- Natural Gas, Propane, Butane, LPG, Light Oils (28/35sec), Wood Pellets, Town Gas, Coke Gas, Bio Oil, Bio Gas

Essential information in 1 device for installing and maintaining furnaces and boilers.

- **LINK** provides wireless information in real time on the C165+ without a device or APP.
- **LINK** Connects to included WPC2 Wireless Pipe Clamps or optional DTHA2 Wireless Temperature Humidity Airflow Adapter.



COMBUSTION

C163 UPC: 053533508352

Residential/Commercial Combustion Analyzer w/ Pressure



BACKED BY
UEi
SERVICE+

6
YEAR
WARRANTY

24
HR
SERVICE

FREE
SHIPPING

Measures

- CO, CO₂, Differential Pressure, Flue and Inlet Temperature

Calculates

- Differential Temperature, Efficiency (Net, Gross), Excess Air

Features

- 6-Year warranty with annual recertification
- Eligible for UEi Service+
- Differential Pressure
- 3 levels of sensor protection
- Over-range protection pump
- NO_x filtered CO sensor
- Low Flow Detection
- Large 6-line backlit display
- Temperature Differential w/ K-Type probe inputs
- Protective water trap

Pre-Programmed Fuels

- Natural Gas, Propane, LPG, Light Oil, Heavy Oil, Bio Oil, Pellets, Butane

AVAILABLE OPTIONS



	C163	C163KIT
UPC	053533508352	053533509243
Analyzer/Probe	•	•
Batteries/Charging Cable	•	•
Carrying Case	•	•
K-type Temp Probes/Spare Filter	•	•
Tubing Kit	•	•
Printer/Spare Paper Roll		•

C161 UPC: 053533508338

Residential Combustion Analyzer



BACKED BY
UEi
SERVICE+

6
YEAR
WARRANTY

24
HR
SERVICE


FREE
SHIPPING

Measures

- CO, CO2, Flue Temperature, Inlet temperature

Calculates

- O2, Differential Temperature, Efficiency (Net, Gross), Excess Air

Features

- Up to 6-Year warranty with annual recertification
- Eligible for UEi Service+
- Large 6-line backlit display
- Heat Exchanger test
- 2 levels of sensor protection
- NOx filtered CO sensor
- Low Flow Detection
- High altitude compensation
- Temperature Differential w/ K-Type probe inputs
- Protective water trap

Pre-Programmed Fuels

- Natural Gas, Propane, LPG, Light Oil, Heavy Oil, Bio Oil, Pellets, Butane

AVAILABLE OPTIONS



	C161	C161C	C161KIT
UPC	053533508338	053533509250	053533509236
Analyzer/Probe	•	•	•
Batteries/Charging Cable	•	•	•
Carrying Case		•	•
K-type Temp Probes/Spare Filter			•
Printer/Spare Paper Roll			•

COMBUSTION & CO DETECTOR



C160 UPC: 053533508321

Flue Gas Analyzer (instrument only)

Measures

- CO, O2, Flue Temperature, Inlet Temperature

Calculates

- CO2, Efficiency (Nett, Gross), Excess Air

Features

- Up to 6-Year warranty with annual recertification
- Eligible for UEi Service+
- Large 6-line backlit display

Includes

- Quick Start Guide (202109)



IRP-2 UPC: 053533606911

Easy Load Fast Printer IR Link (Combustion)

CP2 UPC: 053533508918

Flue Gas Probe for C160 Series Combustion Analyzers



COA2 UPC: 053533508475

Wireless or Stand-Alone CO Detector w/ Sensor Self-Test



Features

- iOS® and Android™ compatible
- Use alone or connect to a smart device
- You need to snap shot the reading off your phone, then send email to print
- Visual LED and Audible alert
- 3 color warning alert (in App)
- 1-Year limited warranty

Functions

- CO Detection: 1 to 999 ppm
- Resolution: 1 ppm
- RF Frequency range: 2400 MHz to 2483.5 Mhz
- RF Output Power (Max.): 8 dbm



CO71A UPC: 053533505511

Long Life Ambient CO Detector

Features

- Preset alarms
- 3-Color warning light
- Audible alert
- Max capture
- Data hold
- 3-Year limited warranty

Functions

- Measures: CO 1 to 999 ppm



CD100A

UPC: 053533503708

Long Gooseneck Combustible Gas Leak Detector

- Minimum detection: 50 ppm methane
- Long 18 inch gooseneck
- Tip-light in sensor cap
- Audible and visual tic rate
- Headphone jack
- 1-Year limited warranty



CD200

UPC: 053533503920

Quick Response Time Combustible Gas Leak Detector w/ Alarm

- Minimum detection: 50 ppm methane
- Long 18 inch gooseneck
- User adjustable alarms
- LED level Indicators
- Tip-light in sensor cap
- 3-Year limited warranty



EM152 UPC: 053533507492
Dual Differential Manometer

- Dual input differential in 11 scales
- Hold/Min/Max/Avg
- Record with elapsed time stamp
- Pressure zero
- Backlit display
- 1-Year limited warranty



EM201B UPC: 053533506907
Hi-Res Dual Input Differential Manometer

- Dual input to ± 60 inches water column
- Measure in inches water column (inWC), mBar, psi and Pa (auto range to hPa)
- Backlit display
- Data hold
- Dynamic Min/Max value capture
- 3-Year limited warranty



EM201SPKIT
UPC: 053533506235
Static Pressure Kit (EM201B, ASP1 (2), Tubing, T Fitting)

- Dual input to ± 60 inches water column
- Measure in inches water column (inWC), mBar, psi and Pa (auto range to hPa)
- Backlit display
- Data hold
- Dynamic Min/Max value capture
- 3-Year limited warranty



INF195C UPC: 053533507423
12:1 Infrared Thermometer w/ K-Type Input

- Circular laser targeting
- 12:1 Distance-to-spot ratio
- Temperature range: -76° to 1022°F (-60° to 550°C)
- Min/Max/Diff/Avg
- K-Type thermocouple input
- 1-Year limited warranty



INF165C UPC: 053533507416
12:1 Infrared Thermometer

- Circular laser targeting
- 12:1 Distance-to-spot ratio
- Temperature range: -76° to 1022°F (-60° to 550°C)
- Max value capture
- Auto power off
- 1-Year limited warranty



PDT655 UPC: 053533508543
Differential Back Fold Pocket Thermometer

- Large easy-to-read backlit display
- Large easy to use buttons
- Reads open or closed
- Measures T1, T2, T1-T2
- Min/Max
- 1-Year limited warranty



PDT650 UPC: 053533701289
Digital Folding Pocket Thermometer

- Temperature range: -58° to 572°F (-50° to 300°C)
- Folding temperature probe
- Folding probe tip measures in any position
- 3-Year limited warranty



550B UPC: 053533701173
Digital Pocket Thermometer Boot w/ Magnet NSF

- Temperature range: -58° to 572°F (-50° to 303°C)
- NSF listed
- Water resistant
- 3-Year limited warranty



DTH35 UPC: 053533506938
Digital Pocket Psychrometer

- Measures: temperature, relative humidity
- Calculates: wet bulb, dew point, enthalpy
- Min/Max
- Data hold
- Large-digit backlit display
- 1-Year limited warranty



PDT660 UPC: 053533508451
Digital Pocket Thermometer NSF

- Temperature: -58° to 572°F (-50° to 300°C)
- Backlit display
- Approx. 1/sec update rate
- Pocket clip
- Folding
- 1-Year limited warranty

CLAMP METERS & ACCESSORIES



Part #	DL429B	DL489	DL389B	DL379B	DL369	DL479	DL469
	PREMIUM		DUAL DISPLAY			ELECTRICAL / INDUSTRIAL	
UPC	053533507164	053533508055	053533508413	053533507171	053533505733	053533507447	053533507485
TRMS	•	•	•			•	•
AC Volts	750V	750V	750V	750V	750V	750V	750V
DC Volts	1000V	1000V	1000V	1000V	1000V	600V	600V
AC current (amps)	600A	600A	400A	400A	400A	600A	400A
DC current (amps)	600A	600A					
AC low amps	2000µA	2000µA	2000µA	2000µA	2000µA		
DC low amps	2000µA	2000µA	2000µA	2000µA	2000µA	2000µA	2000µA
Resistance (Ohms)	60MΩ	60MΩ	40MΩ	40MΩ	40MΩ	60MΩ	40MΩ
Capacitance (Farads)	2000µF	2000µF	4000µF	2000µF		2000µF	
Frequency (Hertz)	99.99Hz - 99.99kHz	99.99Hz - 99kHz	9.999Hz - 199.9kHz	9.999Hz - 199.9kHz	9.999Hz - 99.99kHz	9.999Hz - 99.99kHz	
Duty cycle	•	1.0 to 99%	•	•	•	•	
Temperature	-328° to 2462°F	-328° to 2462°F	-22° to 752°F	-22° to 752°F		-14° to 752°F	
Continuity	•	•	•	•	•	•	•
Diode	•	•	•	•	•	•	•
NCV (LED & Audible)	•	•	Hi/Lo levels	Hi/Lo levels	•	•	•
Min/Max	•	•	•	•	•	•	•
Hold	Peak Hold	Peak Hold	•	•	•	•	•
Ranging	Auto/Man	Auto/Man	Auto/Man	Auto/Man	Auto/Man	Auto/Man	Auto/Man
Display count	6000	6000	4000	4000	4000	6000	4000
Auto power off	•	•	•	•	•	•	•
Low battery warning	•	•	•	•	•	•	•
Backlight	•	•	•	•		•	
Magnetic mount	•	•	•	•		•	
Dual display	•	•	•	•	•		
Worklight	•	•	•	•		•	•
Detachable head	•	•					
Temp differential	•	•					
LRA inrush	•	•					
REL / DC Zero	•						
Wireless to app	•						
iOS & Android app	•						
Safety	CATIII 600V	CATII 1000V	CATIII 600V / CATII 1000V	CATIV 300V	CATIII 600V	CAT IV 600V / CATIII 1000V	CATIII 1000V
Warranty	2-year limited	2-year limited	3-year limited	3-year limited	3-year limited	2-year limited	2-year limited



ATTPC3
K-Type Pipe Clamp
Probe (grip style)
UPC: 053533606942



ATL55
CATIV Test Leads
(Standard)
UPC: 053533602043



ATT29A
Temperature Probe, J-Type,
Fluoroplastic coated
UPC: 053533602227



ATLBPK
Back Probe Test Lead Kit
UPC: 053533606492



DL489COMBO

UPC: 053533508079

True RMS Clamp Meter w/ ATTPC3 Pipe Clamp Probe

- Pipe clamp adapter 2 (ATTPC3)
- Test leads w/alligator clips CATIV 600V/CATII 1000V
- K-Type temperature probe 2 (ATT29)
- Batteries 6 (AAA)
- Zippered pouch
- 2-Year limited warranty



DL389BCOMBO

UPC: 053533508468

True RMS Dual Display Clamp Meter w/Temperature and ATTPC3 Pipe Clamp Adapter

- Pipe clamp adapter (ATTPC3)
- Batteries 2 (AAA)
- Test leads (ATL55)
- K-Type temperature probe (ATT29A)
- Zippered pouch
- 2-Year limited warranty



DL379BCOMBO

UPC: 053533508383

Dual Display Clamp HVAC Meter w/ Temperature and ATTPC3

- Clamp Meter (DL379B)
- Pipe clamp adapter (ATTPC3)
- Test leads
- Batteries 2 (AAA)
- Manual
- 3-Year limited warranty



HVACKIT

UPC: 053533505542

Kit, DL479/ INF165C/ NCV3/ ATTPC3/ AC73 Case

- Digital Clamp meter (DL479)
- Infrared Thermometer (INF165C)
- Pipe clamp adapter (ATTPC3)
- Batteries
- 3-Year limited warranty



TACK30 UPC: 053533508109

Test and Check Professional Kit

- AC 600A True RMS Clamp Meter (DL479)
- Combustible Gas Leak Detector (CD100A)
- Hi-Res Differential Digital Manometer (EM201B)
- Digital Pocket Thermometer (PDT550)
- Temperature pipe clamp adapter (ATTPC3)
- Temperature input jack adapter (ATT70)
- Soft carry case (AC73)
- 2-Year limited warranty



TACK20 UPC: 053533508093

Test and Check Advanced Kit

- AC 600A True RMS Clamp Meter (DL479)
- Combustible Gas Leak Detector (CD100A)
- Differential Digital Manometer (EM152)
- Digital Pocket Thermometer (PDT550)
- Temperature pipe clamp adapter (ATTPC3)
- Temperature input jack adapter (ATT70)
- Soft carry case (AC73)
- 2-Year limited warranty



TACK10 UPC: 053533508086

Test and Check Kit

- AC 400A True RMS Clamp Meter (DL469)
- Combustible Gas Leak Detector (CD100A)
- Differential Digital Manometer (EM152)
- Digital Pocket Thermometer (PDT550)
- Soft carry case (AC73)
- Batteries
- 2-Year limited warranty

View All Indoor and Outdoor AC/R System Parameters from One Location

Wireless Vacuum Gauge Probe

Target Superheat Calculation

Pressure Probes w/ 180° Articulation

Refrigerant Pass Through Port


Wireless Pipe Clamps



**Smart Refrigeration Probes Deluxe Kit
w/ Vacuum Gauge HUB8 UPC: 053533508598**

- ✓ **System refrigerant charging calculations**
- ✓ **Temperature split and psychrometric calculations**
- ✓ **Dual mode vacuum screen for evacuation & rise tests**
- ✓ **Real time target superheat calculation**
- ✓ **Wireless distance of 350ft pending environment**
- ✓ **Easy drag-and-drop probe connections**

Wireless Hygrometer



Magnets secure Hygrometer to plenum and the position lock holds probe in optimum air stream path.

Wireless Pressure Probe



Pass thru port hook up, no hoses or adapters needed. 180° articulation allows access in tight spaces.

Wireless Vacuum Gauge Probe



Instant warm up and response time with an oil contamination and sensor failure detection.

Wireless Pipe Clamp



Narrow head for tight spaces with a thermally isolated sensor for greater accuracy.

Outdoor Temperature Probe



Magnetic hanger allows for temperature measurements in direct air stream.

UEi HUB




Measurement & Calculations

- Liquid and Suction line pressures, temperatures, saturations and outdoor dry bulb
- Superheat, subcooling and target superheat
- Delta and target delta temperatures
- Air Return and supply relative humidity, dry bulb, wet bulb, dew point and enthalpy
- Vacuum & deepest vacuum
- Evacuation and rise Limit target, timer
- H2O saturation point indication
- Selectable units of measure
- High altitude compensation
- 57 refrigerants list and favorites refrigerant menu


Vacuum Screen

Dual Mode Vacuum screen for Evacuation and Rise Tests. Allows you to easily set Evacuation and Rise Tests values and timer.

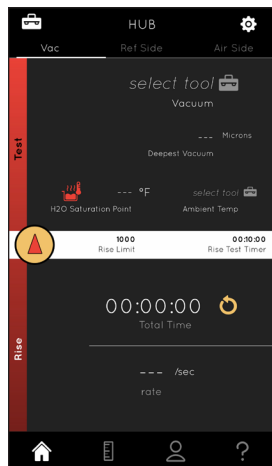



Quick Connections

Easily assign where probes are used on system.

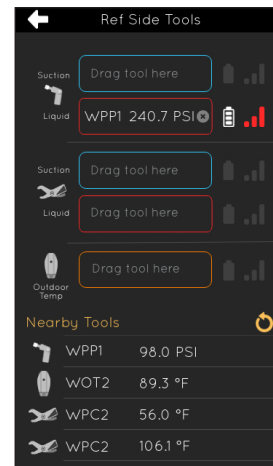



Refrigeration Screen

View Refrigerant values and *real-time target superheat*. Select from list of 57 refrigerants and save most used types.

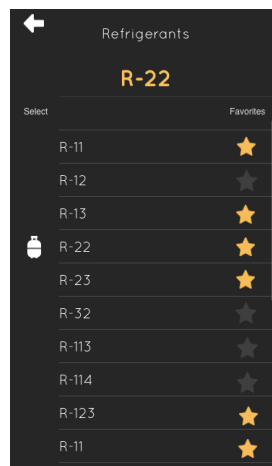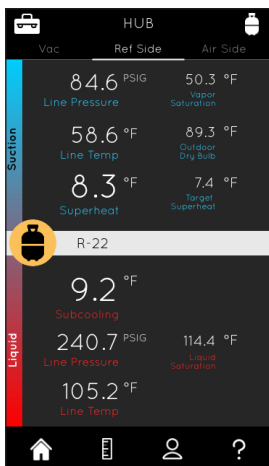

Air Side Screen

Air Side screen displays return & supply measurements allowing users to view additional calculations.

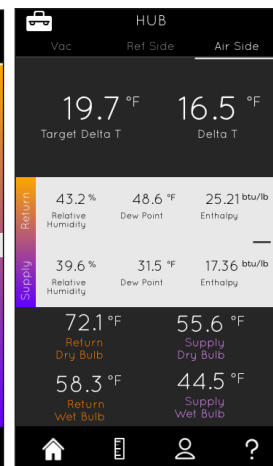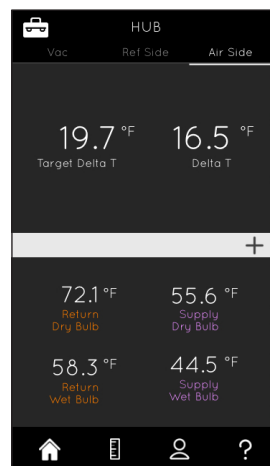

Requires compatible mobile device
Android™ 5+, iOS® 10+ or iPadOS™ 10+

HUB is compatible with measureQuick® (except WVG2 wireless vacuum gauge)



HUB6 UPC: 053533508246

Smart Refrigerant Complete Kit

- In App temperature split and psychrometric calculations
- In App system refrigerant charging calculations
- Pass thru refrigerant ports for easily adding or recovering refrigerant from the system
- 180 degree rotation for easy use in cramped spaces
- 1-Year limited warranty



HUB4 UPC: 053533508239

Smart Refrigerant Charging Kit

- In App system refrigerant charging calculations
- Pass through refrigerant ports for easily adding or recovering refrigerant from the system
- 180 degrees rotation for easy use in cramped spaces
- Pressure range: 0 to 725 psig
- 1-Year limited warranty



WOT2 UPC: 053533508611

Wireless Outside Temperature Probe for HUB8

- Temperature Range: 32° to 180°F (0° to 82°C)
- Works in two positions
- Real time Target superheat calculation (With WHP1)
- Calculate Real Time Target Superheat (requires a WHP1 & the HUB App)
- 1-Year limited warranty



WVG2 UPC: 053533508604

Wireless Vacuum Gauge Probe for HUB8

- Vacuum Range: 2000 microns
- 700 PSI (36200446.8716772 microns) Maximum Over Range
- Temperature Range: 10 to 122 °F (-12 to 50 °C)
- Easy to use vacuum gauge probe
- 1-Year limited warranty



RLD15B UPC: 053533507430

Refrigerant Leak Detector w/ Solid Electrolyte Sensor

- Detects industry standard refrigerants including, but not limited to: HFC, HCFC, CFC (R134A, R410A)
- Solid electrolyte semiconductor sensor
- Digital numeric leak size indicator
- 2-Year limited warranty



DMG150 UPC: 053533507720

Digital Vacuum Micron Gauge

- Range: 0 to 15,000 microns
- Measures in: microns, pascals, Millibar, mmHg, mTorr
- Accuracy: 0 to 9,999 ±% rdg; 10,000 to 15,000 ±10%rdg
- Maximum over pressure: 700 psi
- Instant warm up time
- 1-Year limited warranty

OTHER ITEMS AVAILABLE

Part #	UPC	Description
CD200	053533503920	Quick Response Time Combustible Gas Leak Detector w/ Alarm
RLD10	053533503937	Refrigerant Leak Detector
HA1	0 53533500752	Hermetic Compressor Analyzer

Part #	UPC	Description
DT304	053533505634	Quad Input Logging Thermometer
DT302	053533505627	Dual Input Logging Thermometer
UTLDM1	53533507089	Manual Ranging Multimeter

THE RUMORS ARE TRUE

SUPERIOR ACCURACY

UNRIVALED TOUGHNESS

DEPENDABLE CONNECTIONS

A NEW STANDARD IN WIRELESS SCALES



WRS110 UPC: 053533507584

Smart Wireless Refrigeration Scale 110 lb.

- Measurements can be made on uneven ground
- Load can be weighed accurately even if uncentered
- Requires compatible mobile device and free iOS® or Android™ App
- Wireless range up to 100 ft (30m)
- Water resistance and dust proof
- 1-Year limited warranty



WRS220 UPC: 053533507577

Smart Wireless Refrigeration Scale 220 lb.

- Measurements can be made on uneven ground
- Load can be weighed accurately even if uncentered
- Requires compatible mobile device and free iOS® or Android™ App
- Wireless range up to 100 ft (30m)
- Water resistance and dust proof
- 1-Year limited warranty



WRSX UPC: 053533581195

**Smart Wireless High Capacity
Refrigeration Scale**

- Measurements can be made on uneven ground
- Load can be weighed accurately even if uncentered
- 330 pound capacity
- Use compatible mobile device and free iOS® or Android™ App or display
- Water resistance and dust proof
- 1-Year limited warranty

AIR FLOW & MULTIMETERS



DTHA2 UPC: 053533508420 *Airflow Temperature Humidity Psychrometer*

- Free App
- IOS® and Android™ compatible
- Airflow 217 to 3937 ft/sec
- Temperature 0° to 122°F
- Relative Humidity 0.1% to 99.9% RH
- 1-Year limited warranty



DAFM3B UPC: 053533507188 *Digital Anemometer w/ Humidity Tester*

- Measures: air velocity, temperature and humidity
- Calculates: wet bulb, dew point, and air volume (CFM/CMM)
- Up to 1 hour accumulative average
- Handheld size, easy to carry
- English/ Metric scales
- Auto power off selectable
- 1-Year limited warranty



DAFM4 UPC: 053533506877 *Digital In-Duct Mini Vane Anemometer*

- Measures: air velocity
- Calculates: air volume, dew point, wet bulb
- In-duct or grill surface measurement
- Telescoping anemometer vane
- Up to 1 hour accumulative average
- 1-Year limited warranty



DM525 UPC: 053533508192 *True RMS 1000V Wireless Multimeter w/ Power Factor*

- Wireless to App/ Free App
- 1000V AC/DC
- 10A AC/ 20A DC
- Resistance: 50MΩ
- Min/Max
- Diode test
- 2-Year limited warranty



DM515 UPC: 053533508185 *True RMS 1000V Multimeter w/ Temperature*

- True RMS
- 1000V AC/DC
- 10A AC/DC
- Resistance: 40MΩ
- Min/Max
- Diode test
- 2-Year limited warranty



DM505 UPC: 053533508178 *1000V Digital Multimeter*

- 1000V AC/DC
- Auto/ Manual ranging
- 10A AC/DC
- Resistance: 40MΩ
- Min/Max
- Diode test
- 2-Year limited warranty



IRT803 UPC: 053533508130 *600V AC/DC Digital Insulation Resistance Tester*

- 600V AC/DC
- Resistance 20.00Ω to 20.0kΩ
- Compare reading function
- PI/ DAR test
- 1-Year limited warranty



IRT807 UPC: 053533508147 *1000V AC/DC Advanced Insulation Resistance Tester*

- True RMS
- 1000V AC/DC
- Resistance: 20.00Ω to 20.0kΩ
- Continuity
- PI/ DAR test
- Min/Max
- 1-Year limited warranty