


Permanent Split Capacitor Condenser Fan 5.6" Diameter, Open Drip Proof, Air Over

APPLICATIONS:

Designed to meet manufacturer's requirements for condenser cooling fans.

FEATURES:

- High Efficiency ECONOMIZER® Rated (except as noted)
- 60 Hz
- Capacitor Mounting Holes In Frame Band
- Continuous Duty, Air Over
- Water Slinger
- Designed for use with 370V Capacitors
- Automatic Reset Thermal Overload Protector
- Bearings have All Angle Thrust System
- Green Ground Lead
- Reversible Rotation (Unless otherwise noted)
- Class B Insulation
- Extended Studs are 8-32 UNC Thread unless otherwise noted
- 30" Leads
- Double Flats On Shaft
- Enclosed Endshield At Shaft End
- **Discount Symbol: DS-3HAC**

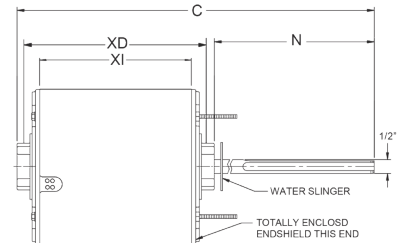

Stud Mount, Shaft Up or Horizontal, Without Capacitor

HP	RPM/ Spd.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Ship Wt.	Notes	OEM
1/4	825	230	8666	\$242	SAB	5.0	1.9	6.0	5.1	4.6	12.1	14		
	1075	208-230	3851	\$104	SAB	5.0	1.7	5.0	4.7	4.4	9.9	10	62	
	1110	208-230	8230	\$126	SAB	5.0	1.6	3.3	-	3.8	7.1	11	72, H33, H42	
1/3	825	230	8667	\$253	SAB	7.5	2.0	6.0	5.6	5.1	11.6	17		
	1075	208-230	6880	\$113	SAB	5.0	2.2	5.0	4.9	4.3	10.4	12	62	
1/2	1075	208-230	3852	\$121	SAB	7.5	3.1	5.0	5.4	4.8	10.9	16	62	
	1075	460	1128	\$282	Ball	10.0	1.3	3.5	—	5.8	9.8	20	62, H16, H33	
3/4	1075	208-230	3097	\$148	SAB	10.0	4.7	3.5	6.1	5.6	11.7	20		
	1075	230	8665	\$204	Ball	12.5	4.4	6.0	5.9	5.3	12.4	19		
1	1080	200	8068	\$513	Ball	30.0	5.9	4.5	—	6.1	11.1	23	H16, H9, H33	LE
	1080	230	8069	\$574	Ball	20	4.9	4.5	—	6.1	11.1	18	62, H16, H9, H33	
	1075	208-230	1888	\$358	Ball	15.0	5.2	6.0	6.8	6.3	13.4	24	62	

LE = Lennox

Note 62: Not an Economizer® model

Note 72: Includes 4 Holes in Shell for Rheem Mount

Note H9: 5/8" Shaft

Note H16: CCWLE rotation only

Note H33: No Hub on Lead End

Note H42: Shaft-end Ventilated, Lead-end Enclosed, Shaft-down Mounting Only

Permanent Split Capacitor Condenser Fan 5.6" Diameter, Open Drip Proof, Air Over

APPLICATIONS:

For use on condenser cooling fans.

FEATURES:

- High Efficiency Economizer® Rated (except as noted)
- 20" or 30" Leads unless otherwise noted
- Double Flats on Shaft—Economizer® Models
- Capacitor Mounting Holes In Frame Band
- Designed for use with 370V Capacitors
- Automatic Reset Thermal Overload Protector
- Bearings Have All Angle Thrust System
- Enclosed Endshield at Shaft End
- Continuous Duty, Air Over
- Class B Insulation
- Green Ground Lead
- Extended Studs
- 60 Hz
- Reversible Rotation
- Water Slinger
- Discount Symbol: DS-3HAC




Figure A




Figure B

Resilient Base, Shaft Up or Horizontal, With Capacitor (Figure A)

HP	RPM/ Spds.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt.	Notes	OEM
1/4	1075	230	3846	\$257	SAB	5.0	1.9	4.9	5.1	4.6	10.4	1	14	62	
1/3	1625	230	4811	\$259	SAB	5.0	1.8	4.9	5.1	4.6	10.7	1	16		
	1625	230	4961	\$360	Ball	5.0	1.8	4.9	5.1	4.6	10.7	1	16	62	
	1075	230	3847	\$269	SAB	7.5	2.2	4.9	5.5	4.9	10.9	1	17		
	1075	230	4960	\$295	Ball	7.5	2.2	4.9	5.4	4.8	10.9	1	17		
	1075	208-230	6986	\$171	Ball	5.0	3.5	4.0	5.4	4.6	9.7	-	18		
1/2	1075	230	3848	\$280	SAB	7.5	3.1	5.0	6.5	5.9	12.0	1	13		
	1075	230	7025	\$349	Ball	7.5	3.1	4.9	6.4	6.0	11.9	1	20		

Hub Ring Mount (2 1/4"), Shaft Up or Horizontal, Without Capacitor (Figure B)

HP	RPM/ Spds.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt.	Notes	OEM
1/4	1625	208-230	1355	\$215	Ball	-	1.2	5.8	6.2	5.6	12.0	1	11		
1/3	825	230	5345	\$267	Ball	5.0	3.0	6.0	6.9	6.4	12.9	1	17	64	
	825	208-230	7040	\$242	Ball	7.5	2.7	6.0	6.4	6.0	12.4	1	23		
1/2	825	230	7041	\$358	Ball	12.5	2.8	6.0	6.7	5.8	13.2	1	22		

Note 62: Not an Economizer® model

Note 64: Capacitor Supplied Detached