



Capacitor Start Belted Fan & Blower NEMA[®]† 48 Frame and 56 Frame, Open Drip Proof, Resilient Base

APPLICATIONS:

Designed to meet manufacturer's requirements for belted fans and blowers.

FEATURES:

- 104°F (40°C) Ambient Rated
- Automatic Reset Thermal Overload Protector
- Reversible Rotation
- Continuous Duty
- Ball Bearings Have All Angle Thrust System
- Dual Voltage
- 208v will not be marked on DOE regulated spread-voltage motors. Refer to online data

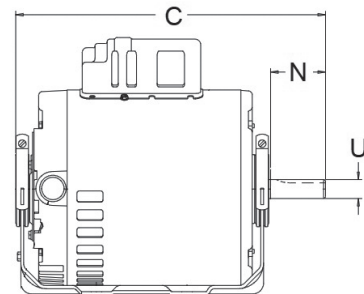

NEMA[®]† 48 Frame

HP	RPM	Voltage	Catalog Number	List	Amps	SF	Shaft N	Shaft U	Total C	Ship Wt. (lbs)	Notes
1/3	1725 RPM	115/230	180	\$339	6.0/3.0	1.35	1.5	0.5	9.9	18	
1/2	3450 RPM	115/208 - 230	298	\$404	8.6/4.3	1.25	1.5	0.5	9.9	19	
3/4	3450 RPM	115/208 - 230	430	\$427	9.2/4.6	1.25	1.5	0.5	10.4	18.68	
1	3450 RPM	115/208 - 230	431	\$465	11.6/5.8	1.25	1.9	0.625	11.3	13.4	

NEMA[®]† 56 Frame

HP	RPM	Voltage	Catalog Number	List	Amps	SF	Shaft N	Shaft U	Total C	Ship Wt. (lbs)	Notes
1/4	1140 RPM	115/208 - 230	BD14CA3J9	\$305	6.4/3.0-3.2	1.35	1.9	0.625	11.31	32	
1/2	1725 RPM	100 - 120/200 - 240	6309	\$477	6.3-5.6/3.1-2.8	1.25	1.9	0.625	10.8	22	98,CSCR,H8
	1725 RPM	115/208 - 230	1790	\$428	9.2/4.6	1.25	1.9	0.625	9.3	22.8	
3/4	1725 RPM	100 - 120/200 - 240	6313	\$545	9.2-8.4/4.6-4.2	1.25	1.9	0.625	11.28	32	98,CSCR
	1725 RPM	115/208 - 230	1893	\$526	11.4/5.7	1.25	1.9	0.625	10.8	26.43	
1	1725 RPM	115/230	3187C	\$563	14.0/7.0	1.25	1.9	0.625	11.8	22.6	80
	1725 RPM	100 - 120/200 - 240	6317	\$674	12.3-10.8/6.2-5.4	1.15	1.9	0.625	12.3	32	98,CSCR
	1725 RPM	115/208 - 230	1769	\$643	14.0/7.0	1.2	1.9	0.625	11.8	34.4	
1 1/2	3450 RPM	115/208 - 230	299	\$627	17.2/9.0	1.15	1.9	0.625	13.3	32	98
	1725 RPM	115/208 - 230	4242	\$694	22.4/11.2	1.15	1.9	0.625	12.8	40.2	
2	3450 RPM	115/208 - 230	399	\$438	18.4/10.1-9.2	1.2	1.9	0.625	12.8	32	CSCR

Note 80 Canadian Standard — Connected CCWLE (Reversible)
Note 98 50/60 Hertz

Note CSCR Capacitor Start /Capacitor Run
Note H8 5.6" Diameter

