



No. V10



No. V11



No. V20



No. V15F

1.0 PRODUCT DESCRIPTION

Available Sizes

- 2 – 12"/DN50 – DN300

Pipe Material

- Carbon steel

Maximum Working Pressure

- 400 psi/2758 kPa

Application

- Connects pipe and provides change in direction
- Supplied with Victaulic Original Groove System (OGS) grooved ends
- Exclusively for use with Victaulic couplings, valves, accessories and pipe which feature ends formed with the Victaulic OGS groove profile

NOTES

- QuickVic™ grooved end fittings are intended for use only in grooved piping systems and are not intended for use with Victaulic plain end couplings.
- QuickVic™ grooved end fittings shall not be used with flange adapters, such as the Victaulic Style 741 or 743 *Vic-Flange* Adapters. When connecting to flanged components, a No. V15 or No. V16 flanged elbow shall be used.

2.0 CERTIFICATION/LISTINGS

Product designed and manufactured under the Victaulic Quality Management System, as certified by LPCB in accordance with ISO-9001:2015.

3.0 SPECIFICATIONS - MATERIAL

Fitting: Ductile iron conforming to ASTM A536, Grade 65-45-12.

Fitting Coating: (specify choice)

Standard:

No. V10, V11, V20: Orange coating

No. V15F/R and V16F/R: Orange and Black coating

Optional: Hot dipped galvanized as per ASTM A123.


ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

4.0 DIMENSIONS


Elbows

No. V10 90° Elbow

No. V11 45° Elbow



No. V10




No. V11

Size		No. V10 90° Elbow		No. V11 45° Elbow	
		Dimensions	Weight	Dimensions	Weight
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. (Each) lb kg	C to E inches mm	Approx. (Each) lb kg
2 DN50	2.375 60.3	2.75 70	1.5 0.7	2.00 51	1.2 0.5
2 ½	2.875 73.0	3.00 77	2.0 0.9	2.25 58	1.7 0.8
DN65	3.000 76.1	3.00 77	2.0 0.9	2.25 58	1.7 0.8
3 DN80	3.500 88.9	3.50 86	2.7 1.2	2.50 64	2.3 1.0
4 DN100	4.500 114.3	4.00 102	4.1 1.9	3.00 77	3.5 1.6
DN125	5.500 139.7	4.88 124	5.8 2.6	3.25 83	4.9 2.2
5	5.563 141.3	4.88 124	7.3 3.3	3.25 83	5.4 2.4
	6.500 165.1	5.50 140	10.2 4.6	3.50 89	6.7 3.0
6 DN150	6.625 168.3	5.50 140	9.7 4.4	3.50 89	7.1 3.2
8 DN200	8.625 219.1	6.88 173	26.0 11.8	4.25 108	18.6 8.4
10 DN250	10.750 273.0	8.25 210	42.2 19.2	4.00 102	24.9 11.3
12 DN300	12.750 323.9	9.50 239	68.0 30.8	4.50 115	36.8 16.7

4.1 DIMENSIONS

Tee

No. V20 Straight Tee



No. V20

Size		Dimensions		Weight
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. (Each) lb kg	
2	2.375	2.75	2.2	
DN50	60.3	70	1.0	
2 ½	2.875	3.00	3.4	
	73.0	77	1.5	
DN65	3.000	3.00	3.2	
	76.1	77	1.4	
3	3.500	3.50	3.2	
DN80	88.9	86	1.5	
4	4.500	4.00	5.8	
DN100	114.3	102	2.6	
	5.500	4.88	11.3	
DN125	139.7	124	5.1	
5	5.563	4.88	14.4	
	141.3	124	6.5	
	6.500	5.50	17.0	
	165.1	140	7.7	
6	6.625	5.50	20.7	
DN150	168.3	140	9.4	
8	8.625	6.88	36.9	
DN200	219.1	173	16.8	
10	10.750	8.25	63.7	
DN250	273.0	210	28.9	
12	12.750	9.50	86.3	
DN300	323.9	239	39.2	

4.2 DIMENSIONS


Flanged Elbows

No. V15F ANSI Class 150 Flanged Elbow (Flat Face)

No. V15R ANSI Class 150 Flanged Elbow (Raised Face)

No. V16F ANSI Class 300 Flanged Elbow (Flat Face)

No. V16R ANSI Class 300 Flanged Elbow (Raised Face)

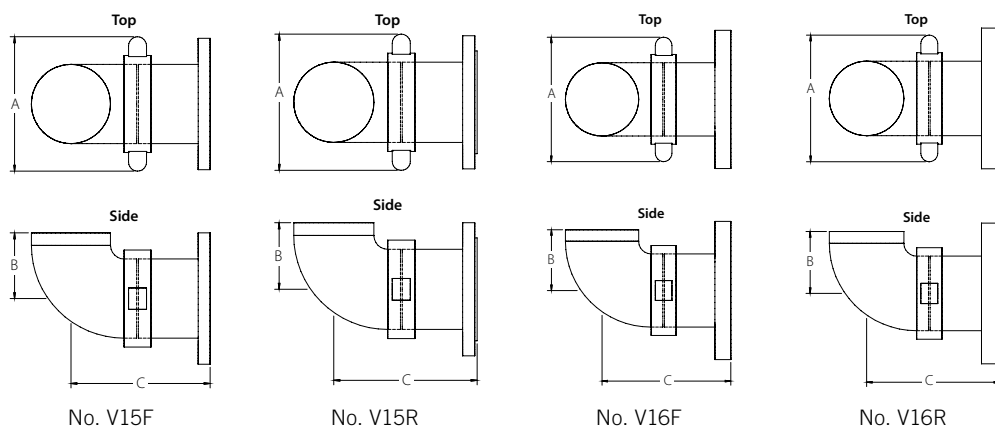

Size		No. V15F and No. V15R ANSI Class 150 Flanged Elbow				No. V16F and No. V16R ANSI Class 300 Flanged Elbow			
Nominal inches DN	Actual Outside Diameter inches mm	A inches mm	B inches mm	C inches mm	Approx. Weight (Each) lb kg	A inches mm	B inches mm	C inches mm	Approx. Weight (Each) lb kg
2 DN50	2.375 60.3	6.13 156	2.75 70	6.88 175	10.2 4.6	6.13 156	2.75 70	6.88 175	12.4 5.6
2½	2.875 73.0	6.75 171	3.00 76	7.13 181	14.9 6.8	6.75 171	3.00 76	7.13 181	16.9 7.7
3 DN80	3.500 88.9	7.50 191	3.50 89	7.63 194	18.1 8.2	7.50 191	3.50 89	7.63 194	22.9 10.4
4 DN100	4.500 114.3	8.75 222	4.00 102	10.13 257	27.7 12.6	8.75 222	4.00 102	10.13 257	36.6 16.6
6 DN150	6.625 168.3	11.25 286	5.50 140	11.63 295	45.4 20.6	11.25 286	5.50 140	11.63 295	65.4 29.7
8 DN200	8.625 219.1	14.25 362	6.88 175	13.06 332	82.4 37.4	14.25 362	6.88 175	13.06 332	111.4 50.5
10 DN250	10.750 273.0	17.13 435	8.25 210	16.44 418	129.8 58.9	17.13 435	8.25 210	16.44 418	166.6 75.6
12 DN300	12.750 323.9	19.00 483	9.50 241	17.69 449	183.2 83.1	19.00 483	9.50 241	17.69 449	241.4 109.5

5.0 PERFORMANCE

Flow Data

Frictional Resistance

This chart expresses the frictional resistance of the Victaulic QuickVic™ Grooved End Fittings as equivalent feet of straight pipe.

Size		No. V10 90° Elbow	No. V11 45° Elbow	No. V20 Tee	
Nominal inches DN	Actual Outside Diameter inches mm			Branch ft m	Run ft m
2 DN50	2.375 60.3	3.5 1.1	1.8 0.5	8.5 2.6	3.5 1.1
2½	2.875 73.0	4.3 1.3	2.2 0.7	10.8 3.3	4.3 1.3
DN65	3.000 76.1	4.5 1.4	2.3 0.7	11.0 3.4	4.5 1.4
3 DN80	3.500 88.9	5.0 1.5	2.6 0.8	13.0 4.0	5.0 1.5
4 DN100	4.500 114.3	6.8 2.1	3.4 1.0	16.0 4.9	6.8 2.1
DN125	5.500 139.7	8.3 2.5	4.1 1.3	20.6 6.3	8.3 2.5
5	5.563 141.3	8.5 2.6	4.2 1.3	21.0 6.4	8.5 2.6
	6.500 165.1	9.8 3.0	4.9 1.5	24.5 7.5	9.8 3.0
6 DN150	6.625 168.3	10.0 3.0	5.0 1.5	25.0 7.6	10.0 3.0
8 DN200	8.625 219.1	13.0 4.0	6.5 2.0	33.0 10.1	13.0 4.0
10 DN250	10.750 273.0	17.0 5.2	8.3 2.5	41.0 12.5	17.0 5.2
12 DN300	12.750 323.9	20.0 6.1	10.0 3.0	50.0 15.2	20.0 6.1

6.0 NOTIFICATIONS



 **WARNING**

- Read and understand all instructions before attempting to install, remove, adjust, or maintain any Victaulic piping products.
- Always verify that the piping system has been completely depressurized and drained immediately prior to installation, removal, adjustment, or maintenance of any Victaulic products.
- Wear safety glasses, hardhat, and foot protection.

Failure to follow these instructions could result in death or serious personal injury and property damage.

7.0 REFERENCE MATERIALS

- [06.33: Victaulic QuickVic™ Installation-Ready™ Rigid Coupling Style 107V](#)
- [07.01: Victaulic OGS Grooved End Fittings](#)
- [29.01: Victaulic Terms and Conditions of Sale](#)
- [I-100: Victaulic Field Installation Handbook](#)

User Responsibility for Product Selection and Suitability

Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, installation guide, or this disclaimer.

Intellectual Property Rights

No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

Note

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Installation

Reference should always be made to the Victaulic installation handbook or installation instructions of the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at [www.victaulic.com](#).

Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

Trademarks

Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.