

Tech Data

Viega PureFlow® Press Commercial Ball Valve Model 2870ZL



Description

The Viega PureFlow Press commercial ball valve available in sizes from 1/2" to 2" is equipped with a zero lead bronze body, stainless steel ball, and EPDM seals.

Features

- Stainless steel ball
- PTFE seat
- Brass stem

Accessories

- Handle model 2971.8
- T-handle model 2971.26
- Insulated handle model 2971.46
- Stem extension model 2971.66

Ratings

- Temperature range: 0°F-180°F
- Max. operating pressure: 160 psi

Approvals

- NSF®-61
- NSF®-372
- NSF®-U.P. Code
- ASME112.4.14/CSA B125.14
- IAPMO/ANSI Z1157
- ASTM F877/F3253/F3347
- NSF/ANSI 359



This document is subject to updates. For the most current Viega technical literature, please visit www.viega.us.




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

Component	Material
Body	Zero Lead bronze CC246E
Ball	Stainless steel
Seat	PTFE
Stem	Brass
Stem seals	EPDM
Nut	Zinc-plated steel

PureFlow Press Commercial Ball Valve Brass P x P Model 2870ZL

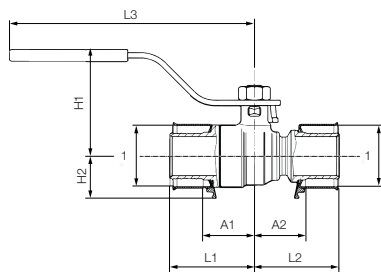

Part No.	Size (in)	H1 (in)	H2 (in)	L1 (in)	L2 (in)	L3 (in)	A1 (in)	A2 (in)	Cv (US gal/min)
	1								
87900	1/2	2.01	0.59	1.58	1.30	4.57	1.06	0.79	4.96
87905	3/4	2.01	0.63	1.58	1.30	4.57	1.06	0.83	13.5
98200	1	2.01	0.63	1.58	1.58	4.57	1.02	0.87	15.1
98201	1 1/4	2.09	0.79	1.89	1.73	4.57	1.02	0.95	32.7
98202	1 1/2	2.48	1.10	2.01	1.89	5.79	1.14	1.02	54.7
98203	2	2.68	1.18	2.28	2.28	5.79	1.22	1.22	88.2



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PF 0525 PureFlow Press Commercial Ball Valve

viega