

# Walraven W5000 Cushion Clamp


(H 32 210)

to be used for plastic pipe applications 12 - 63 mm



## Features and Benefits

- the new alternative to the Cushion Clamp
- removable spacer washers allow the sliding or gripping of the pipe within the clamp
- one-piece design - no loose parts
- easier, faster, safer - installs with one hand
- 3-way screw head - Phillips, flat and hex
- W Series Clamps are boxed for easy handling - no more bags
- material: steel 1.0242
- surface treatment: high grade Zn-Mg based coating (600 hours salt spray)
- green EPDM rubber lining will prevent plasticiser migration
- noise/vibration insulating lining according DIN EN ISO 3822-1
- age resistant lining
- Test Reports:
  - Strength and corrosion:UL 1565 Listed
  - Plasticizer migration behaviour:2016-TR151002-V5
  - Noise emission:2016-SG-Bauakustik-1647-001-16

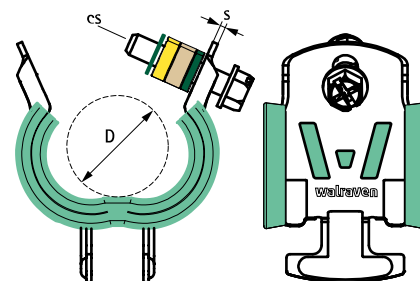

| Part No. | D<br>(mm) | D<br>(")      | D / CTS<br>(") | D / IPS<br>(") | s<br>(mm) | cs    | F <sub>a,z</sub><br>(N) | F <sub>a,z</sub><br>(lbs) | ULS | ULC | Pack 1 |
|----------|-----------|---------------|----------------|----------------|-----------|-------|-------------------------|---------------------------|-----|-----|--------|
| 2055007  | 12 - 13   | 0.472 - 0.512 | 3/8            | -              | 1.25      | 1/4"  | 890                     | 200                       | ULS | ULC | 50     |
| 2055008  | 14 - 15   | 0.512 - 0.591 | -              | 1/4            | 1.25      | 1/4"  | 890                     | 200                       | ULS | ULC | 50     |
| 2055009  | 15 - 16   | 0.512 - 0.591 | 1/2            | -              | 1.25      | 1/4"  | 890                     | 200                       | ULS | ULC | 50     |
| 2055010  | 17 - 18   | 0.630 - 0.748 | -              | 3/8            | 1.25      | 1/4"  | 980                     | 220                       | ULS | ULC | 50     |
| 2055012  | 19 - 22   | 0.787 - 0.906 | 5/8 - 3/4      | 1/2            | 1.25      | 1/4"  | 980                     | 220                       | ULS | ULC | 50     |
| 2055013  | 24 - 25   | 0.984 - 1.142 | -              | -              | 1.50      | 1/4"  | 1,780                   | 400                       | ULS | ULC | 50     |
| 2055014  | 26 - 29   | 0.984 - 1.142 | 1              | 3/4            | 1.50      | 1/4"  | 1,780                   | 400                       | ULS | ULC | 50     |
| 2055016  | 32 - 35   | 1.260 - 1.378 | 1-1/4          | 1              | 1.50      | 1/4"  | 1,780                   | 400                       | ULS | ULC | 50     |
| 2055020  | 40 - 43   | 1.575 - 1.693 | 1-1/2          | 1-1/4          | 1.75      | 5/16" | 1,780                   | 400                       | ULS | ULC | 25     |
| 2055022  | 47 - 49   | 1.850 - 1.929 | -              | 1-1/2          | 1.75      | 5/16" | 1,780                   | 400                       | ULS | ULC | 25     |
| 2055023  | 50 - 52   | 1.969 - 2.047 | -              | -              | 1.75      | 5/16" | 1,780                   | 400                       | ULS | ULC | 25     |
| 2055024  | 53 - 54   | 2.087 - 2.126 | 2              | -              | 1.75      | 5/16" | 1,780                   | 400                       | ULS | ULC | 25     |
| 2055025  | 56 - 58   | 2.205 - 2.283 | -              | -              | 1.75      | 5/16" | 1,780                   | 400                       | ULS | ULC | 25     |
| 2055026  | 60 - 63   | 2.362 - 2.480 | -              | 2              | 1.75      | 5/16" | 1,780                   | 400                       | ULS | ULC | 25     |

For additional testing information, please contact our Sales Office!

## Complementary

Walraven RapidStrut® Fixing Rail  
(BUP1000)