

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Tag _____

CO-200-R

Floor Cleanout with Round Top

Specification

Watts CO-200-R epoxy coated cast iron floor cleanout with 5"(127) round adjustable gasketed nickel bronze top, removable gas tight gasketed brass cleanout plug, and no hub (standard) outlet.

Pipe Sizing (Select One)		
Suffix	Description	
2	2"(51) Pipe Size	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☒

Outlet Type (Select One)		
Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
X	Inside Caulk	☒

Options (Select One)		
Suffix	Description	
-C	Membrane Clamp	☐
-6	Vandal Proof	☐
-13	Galvanized Body	☐
-CF	Carpet Clamping Flange	☒
-SO	Side Outlet	☐

Optional Body Material (NH Only)		
Suffix	Description	
-60	PVC Body w/Poly Plug	☒
-61	ABS Body w/Poly Plug	☐

**Load
Rating**

MD

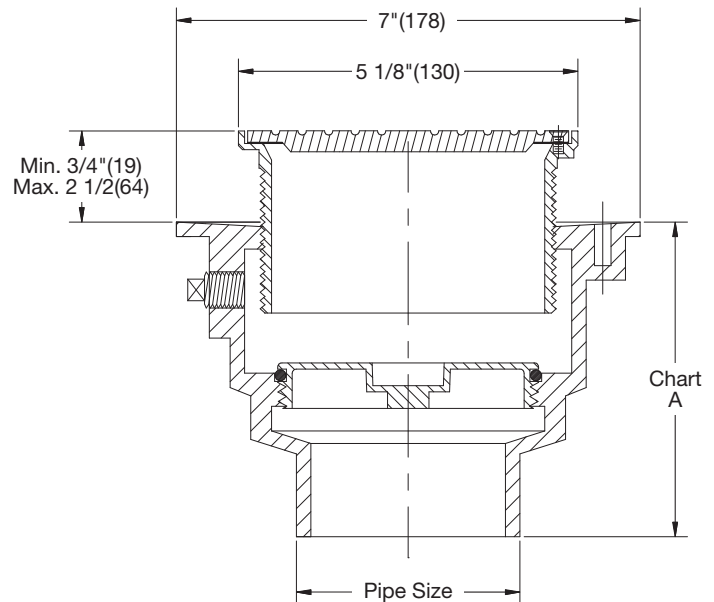


Chart A

Pipe Size	NH	Push-On	PVC/ABS
2"(51)	4 3/4"(121)	5 1/2"(140)	4"(102)
3"(76)	4 3/4"(121)	5 1/2"(140)	4"(102)
4"(102)	4 3/4"(121)	5 1/2"(140)	4"(102)

NOTICE

The load classifications are in accordance with the American National Standards ASME A112.36.2M-91(R2012) ASME Ratings are as follows:
MD - Safe Live Load 2000-4999 lbs. (900-2250 kg)
The above categories are given as a guide only.
Please consult factory.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com

Canada: T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-CO-200-R 2205

© 2022 Watts