

For Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Tag _____

FD-320-SET

Area Drain with 8" Round Adjustable Top, Grate Supported By Bucket

Specification

Watts FD-320-SET epoxy coated cast iron area drain with anchor flange, membrane clamp with weepholes, 8"(203) diameter adjustable top, loose set heel proof ductile iron grate supported by bucket, and no hub connection (standard)

Pipe Sizing (Select One)		
Suffix	Description	
2	2"(51) Pipe Size	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐
6	6"(152) Pipe Size (NH Only)	☐

Outlet Type (Select One)		
Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
T	Threaded Outlet	☐
X	Inside Caulk	☐

Options (Select One or More)		
Suffix	Description	
-1	Nickel Bronze Top	☐
-6	Vandal Proof	☐
-7	Trap Primer Tapping	☐
-8	Backwater Valve (3"/4" Only)	☐
-13	Galvanized	☐
-34	Closure Plug	☐
-F4-50	4" Round Cast Iron Funnel	☐
-F4-1	4" Round Nickel Bronze Funnel	☐
-F6-1	6" Round Nickel Bronze Funnel	☐
-G-50	4x9" Oval Cast Iron Funnel	☐
-G-1	4x9" Oval Nickel Bronze Funnel	☐
-SO	Side Outlet (2, 3, 4" Only)	☐



Load Rating	Free Area
HD	9

Please refer to watts.com for BAA information on specific models.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

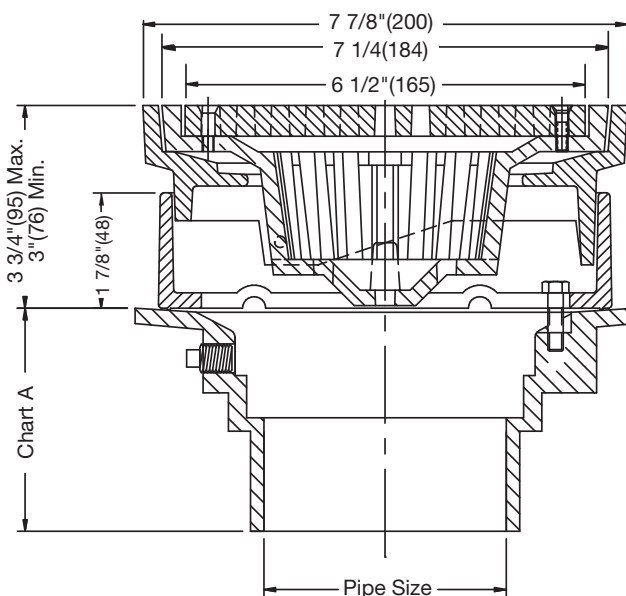


Chart A

Pipe Size	Std. No Hub	P Push On	T Female Thread	X Inside Caulk	60/61 PVC/ABS
2"(51)	3 5/8"(92)	4 1/4"(108)	4 1/4"(108)	4 1/2"(114)	4"(102)
3"(76)	3 5/8"(92)	4 1/4"(108)	4 1/4"(108)	4 1/2"(114)	4"(102)
4"(102)	3 5/8"(92)	4 1/4"(108)	4 1/4"(108)	4 1/2"(114)	4"(102)
6"(152)	3 1/2"(89)				

NOTICE

The load classifications are in accordance with the American National Standard ASME A112.21.1M

ASME Ratings are as follows:

HD - Safe Live Load 5000-7499 lbs. (2250-3375 kg)

The above categories are given as a guide only. Please consult factory.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com

Canada: T: (888) 208-8927 • F: (888) 479-2887 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com