



RD-200-CP

Tag: _____

Small Area Roof Drain with Promenade Top

Components:




B3



B3-CB




FD-330



FC-2

SPECIFICATION: Watts Drainage Products RD-200-CP epoxy coated cast iron roof drain with flashing clamp with integral gravel stop, 8"x8" (203x203) adjustable epoxy coated cast iron promenade top, and no hub (standard) outlet.

Order Code: RD-20 ☐ ☐ ☐ -CP- ☐ ☐ ☐

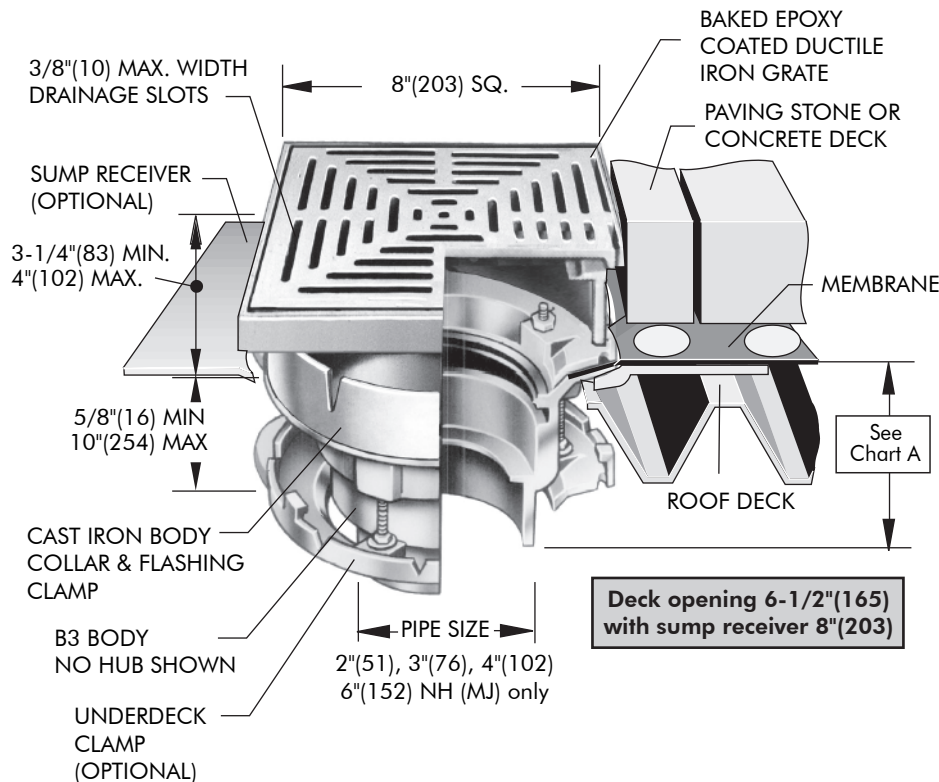

Ex. RD-202P-CP-K

Pipe Sizing (Select One)

Suffix	Description	
2	2"(51) Pipe Size	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐
6	6"(152) Pipe Size	☐

Outlet Type (Select One)

Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
T	Threaded Outlet	☐
X	Inside Caulk	☐

Grate (Select One)

Suffix	Description	
-1	Nickel Bronze Veneer	☐
-4	Ductile Iron	☐

Options (Select One or More)

Suffix	Description	
-B	Sump Receiver Flange	☐
-C	Secondary Membrane Clamp	☐
-D	Underdeck Clamp*	☐
-E	Adjustable Extension	☐
-SIFC	Flow Control (2", 3" 4" Outlets only) Specify Flow required	☐
-SO	Side Outlet**	☐
-W-1	Waterproofing Flange	☐
-Z	Extended Integral Wide Flange	☐
-5	Sediment Bucket	☐
-6	Vandal Proof Top	☐
-10	Secured Top	☐
-12	Galvanized Top	☐
-13	All Galvanized	☐
-113M	Special Epoxy from 3M Range	☐

Optional Body Material (NH Only)

Suffix	Description	
-60	PVC Body w/Socket Outlet	☐
-61	ABS Body w/Socket Outlet	☐

* Underdeck Clamp (-D option) only available in 2"(51), 3"(76), 4"(102) pipe sizes.

** Side Outlet (-SO) option only available in 2"(51), 3"(76), 4"(102) pipe sizes.
Underdeck Clamp (-D option) is not available when -SO is selected.

Chart A

	Std.	P	T	X	60/61
Pipe Size	No Hub	Push On	Female Thread	Inside Caulk	PVC/ABS
2"(51)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	3-3/4"(95)
3"(76)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	3-3/4"(95)
4"(102)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
6"(152)	3-1/2"(89)				

Load Rating & Free Area

Grate	Load Rating	Free Area Sq. In.
-1	*HD	15
-4	*HD	15

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
HD - Safe Live Load 5000-7499 lbs.(2250-3375kg)
The above categories are given as a guide only.
Please consult factory.

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



CANADA: 5435 North Service Road, Burlington, ON, L7L 5H7 TEL: 905-332-6718 TOLL-FREE: 1-888-208-8927 Website: www.wattsdrainage.ca

