



DATA SUBMITTAL

In Line
Hydro-Plus ZHP
Well Tanks

Models: ZHP5 – ZHP200IL Date: 11/2021

Job Name: _____

Submitted By: _____

Job Location: _____

Approved By: _____

Order No.: _____

Engineer: _____

Notes: _____

Contractor: _____

Sales Rep.: _____

Description

Zilmet in-line Hydro Plus Well Tanks come with a factory precharge of 38 PSIG. The precharge is field adjustable. These tanks have a maximum working pressure of 150 PSIG, a stainless steel connector, a butyl diaphragm, and an epoxy powder-coated exterior paint in almond color. These tanks can be installed vertically or horizontally. If installed vertically air side up or horizontally the tank must be fully supported independent from the piping. NSF61 certified.

Construction:

Shell: Carbon Steel
Connection: Stainless Steel
Factory Precharge: 38 PSIG
Membrane: Butyl
Color: Almond

Performance Specifications

Maximum Design Temperature: 210°F
Maximum Design Pressure: 150 PSIG

Model Number	Volume (gal)	UPC Code	Tagging Information	Quantity
ZHP5	2.1	5010791		
ZHP12	4.8	5011026		
ZHP18	6.3	5041351		
ZHP104IL	9.2	5010241		
ZHP200IL	13.2	5010258		




DATA SUBMITTAL

In Line
Hydro-Plus ZHP
WellTanks

Models: ZHP5 – ZHP200IL

Date: 11/2021

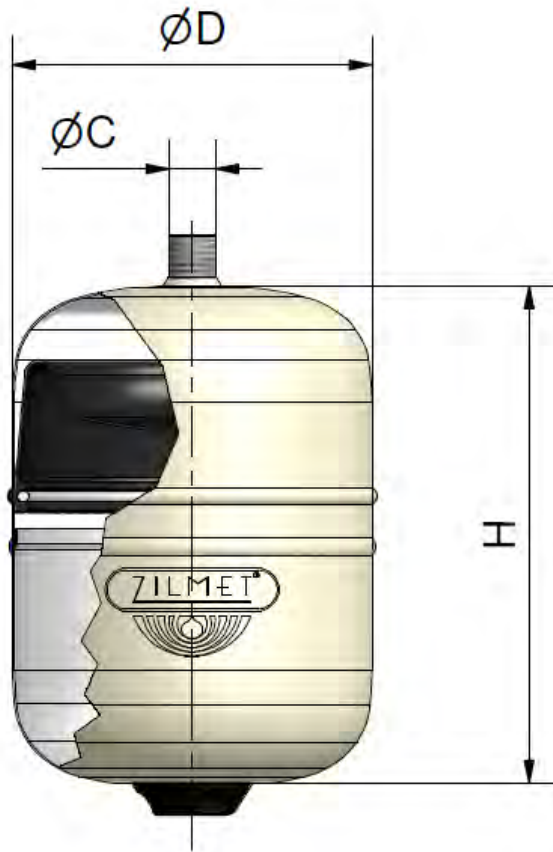

Model Number	Capacity (gal)	D – Diameter (in)	H – Height (in)	Weight (lbs)	C - Connection (NPT)	System Drawdown	
						30-50 psig	40-60 psig
ZHP5	2.1	7.9	11.0	6	¾"	0.7	0.6
ZHP12	4.8	10.6	13.7	10	¾"	1.6	1.4
ZHP18	6.3	11.8	15.4	11	¾"	2.2	1.9
ZHP104IL	9.2	15.0	14.6	19	1"	3.1	2.7
ZHP200IL	13.2	15.0	19.6	23	1"	4.5	3.9