



Z886-HD



6-3/4 [171] WIDE REVEAL TRENCH DRAIN SYSTEM WITH HEAVY-DUTY FRAME ASSEMBLY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE FOR
CONCRETE ENCASEMENT AND REINFORCING
BASED UPON APPLICATION AND LOCAL CODES

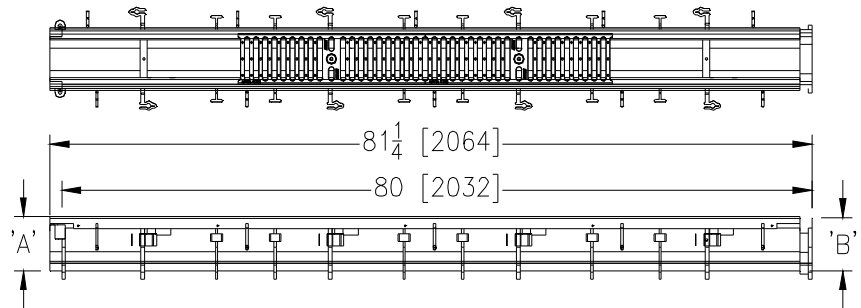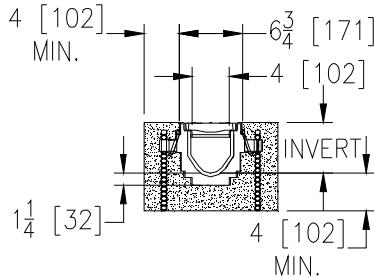

NOTE: + Actual Channel length is 81 1/4 [2064] to allow for overlap.

ENGINEERING SPECIFICATION: Zurn Z886-HD

Channels are 80" [2032 mm] long, 6-3/4" [171 mm] wide reveal and have a 4" [102 mm] throat. Modular channel sections are made of 0% water absorbent High Density Polyethylene (HDPE). Channels have a positive mechanical connection between channel sections that will not separate during the installation and mechanically lock into the concrete surround every 10" [254 mm]. Channels weigh less than 2.31 lbs.[1.05kg] per linear foot, have a smooth, 1-1/2" [38 mm] radiused self cleaning bottom with a Manning's coefficient of .009 and .75% or neutral 0% built in slope. Channels have rebar clips standard to secure trench in its final location. Channels provided with standard DGC grates that lock down to frame. Zurn 5.375" [137 mm] wide reveal Ductile Iron Slotted Grate conforming to ASTM specification A536-84, Grade 80-55-06. Ductile Iron grate is rated class C per the DIN EN1433 top load classifications. Supplied in 20" [508 mm] nominal lengths with 1/2" [13 mm] wide slots, and 3/4" [19 mm] bearing depth. Grate has an open area of 28.1 sq. in per ft. [59,463 sq. mm per meter]. The .105" [2.67 mm] thick Heavy-Duty Carbon Steel Frame Assembly conforms to ASTM specification A36 with 10 - 4" [102 mm] long concrete anchors per 80" [2032 mm]. Grate lockdown bars are to be integral to the frame. Frame supplied with powder coated finish. All welds must be performed by a certified welder per ASTM standard AWS D1.1. Frames produced in the U.S.A.

PREFIX OPTIONS (Check/specify appropriate options)

___ Z Six-foot, Eight-inch High Density Polyethylene (HDPE)*

SUFFIX OPTIONS (Check/specify appropriate options)

Outlet Adapters Add/Each

___ E1 Closed End Cap
___ E2 2 [51] No-Hub End Outlet
___ E3 3 [76] No-Hub End Outlet
___ E4 4 [102] No-Hub End Outlet
___ E6 6 [152] No-Hub End Outlet
___ U2 2 [51] No-Hub Bottom Outlet
___ U3 3 [76] No-Hub Bottom Outlet
___ U4 4 [102] No-Hub Bottom Outlet
___ U6 6 [152] No-Hub Bottom Outlet

Frame Options

___ CBF Black Acid Resistant Coated Top Frame
___ LD Light Duty Grates on Heavy Duty Frame
___ SW Sidewall Extension - 9 [229] High
___ SW2 Sidewall Extension - 18 [457] High

Grate Options (Load Classifications are per DIN EN1433)

___ BDC Black Acid Resistant Epoxy Coated Ductile Grate - Class C
___ BDE Black Acid Resistant Epoxy Coated Ductile Grate - Class E
___ BG Galvanized Ductile Iron Bar Grate - Class C
___ DBG Ductile Iron Cast Bar Grate - Class C
___ DC Ductile Iron Solid Cover - Class C
___ DGC Ductile Iron Slotted Grate - Class C*
___ DGE Ductile Iron Slotted Grate - Class E
___ GDC Galvanized Ductile Iron Slotted Grate - Class C
___ GDE Galvanized Ductile Iron Slotted Grate - Class E
___ GHPDE Galvanized Heel-Proof Ductile Grate - Class E
___ HPDE Heel-Proof Ductile Slotted Grate - Class E
___ RFGC Reinforced Slotted Galvanized Grate - Class C
___ RFSC Reinforced Slotted Stainless Steel Grate - Class C
___ RPGC Reinforced Perforated Galvanized Grate - Class C
___ RPGRC Reinforced Perforated Galvanized Reverse Punch Grate - Class C
___ RPSC Reinforced Perforated Stainless Steel Grate - Class C
___ RPSRC Reinforced Perforated Stainless Steel Reverse Punch Grate - Class C

Miscellaneous Options

___ JC Joint Connector
___ VP Vandal-Proof Lockdown

Trench No.	'A' Shallow Inv.	'B' Deep Inv.	Flow		
			(cfs)	(gpm)	(lps)
8601	3.50 [89]	4.10 [104]	0.21	93	6
8602	4.10 [104]	4.70 [119]	0.27	122	8
8603	4.70 [119]	5.30 [135]	0.34	152	10
8603N	5.30 [135]	5.30 [135]	-	-	-
8604	5.30 [135]	5.90 [150]	0.41	183	12
8605	5.90 [150]	6.50 [165]	0.48	214	13
8606	6.50 [165]	7.10 [180]	0.55	245	15
8606N	7.10 [180]	7.10 [180]	-	-	-
8607	7.10 [180]	7.70 [196]	0.62	276	17
8608	7.70 [196]	8.30 [211]	0.69	308	19
8609	8.30 [211]	8.90 [226]	0.76	339	21
8610	8.90 [226]	9.50 [241]	0.83	371	23
8611	9.50 [241]	10.10 [257]	0.90	403	25
8612	10.10 [257]	10.70 [272]	0.97	435	27
8612N	10.70 [272]	10.70 [272]	-	-	-
8613	10.70 [272]	11.30 [287]	1.04	467	29
8614	11.30 [287]	11.90 [302]	1.11	498	31
8615	11.90 [302]	12.50 [318]	1.18	530	33

Decorative Grate Options (Load Classifications are per DIN EN1433)

___ SBG Stainless Steel Bar Grate - Class E

MADE in the U.S.A.

___ BDE-USA Black Acid Resistant Epoxy Coated Ductile Grate - Class E
___ DGC-USA Ductile Iron Slotted Grate - Class C
___ DGE-USA Ductile Iron Slotted Grate - Class E
___ GDC-USA Galvanized Ductile Slotted Grate - Class C
___ GDE-USA Galvanized Ductile Slotted Grate - Class E
___ GHPDE-USA Galvanized Heel-Proof Ductile Grate - Class E
___ HPDE-USA Heel-Proof Ductile Slotted Grate - Class E
___ PPC Plastic Perforated Grate - Class C

Miscellaneous Options

___ DB Bottom Dome Strainer

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Rev. F

Date: 1/26/2017

C.N. No. 136162

Prod. | Dwg. No. Z886-HD