

BODY / STRAINER COMBINATIONS

30000-P Body Assy. with Wall Strainer  Page 121	30000-R Body Assy. with Gutter Strainer  Page 121	30000-S Body Assy. with SUPER-FLO® Strainer  Page 122	30002-ST-A Body Assy. with Trap & SUPER-FLO® Strainer  Page 122	30304-Z-A No-Hub C.I. Body with SUPER-FLO® Strainer  Page 122	30500-A Body w/Deep Trap & SUPER-FLO® Strainer  Page 122
--	--	--	---	--	---

ROUND-TOP DRAINS

32100 9" Top, Medium-Duty Drain  Page 124	32100-39 9" Top with Solid Cast-Iron Cover  Page 124	32100-AE 9" Top, Adjustable Collar  Page 125	32100-AE-LC1-88 9" Top, Key-Lock Drain, Adjustable Collar  Page 126	32100-AE-TG 9" Top Tractor Drain, Adjustable Collar  Page 126	32100-TG 9" Tractor Top Drain  Page 126
--	---	---	---	--	--

ROUND-TOP DRAINS

32150 Two 9" Top Blood Drains, Extra-Heavy-Duty Grate  Page 127	32160 9" Tractor Top Drain  Page 127	32200 12-5/8" Top Medium-Duty Drain, SUPER-FLO® Grate  Page 128	32200-AE 12-5/8" Top Medium-Duty Drain, Adjustable Collar  Page 129	32200-AE-SD 12-5/8" Top Special-Duty Drain, Adjustable Collar  Page 130	32200-SD 12-5/8" Top Special-Duty Garage Drain  Page 130
--	---	--	---	--	---

ROUND-TOP DRAINS

32300 12-5/8" Top Medium-Duty Drain, SUPER-FLO® Grate  Page 131	32330 12-5/8" Top Medium-Duty Drain with Bucket  Page 132	32330-SD 12-5/8" Top Special-Duty Garage Drain  Page 132	34710 14-7/8" Top Parking Deck Drain  Page 133	34720 14-7/8" Top Parking Deck Drain with Bucket  Page 133	34920 21-1/8" Top Extra-Heavy-Duty, NON-CLOG Drain  Page 134
--	--	---	--	---	---

32100 SERIES

SUPER-FLO® 9" TOP

APPLICATION

For use in moderate traffic areas such as automobile garages for any type of floor construction where a small to medium flow of liquid is anticipated.

SPECIFICATION

JOSAM 32100 Series coated cast iron Floor Drain, two-piece body with double drainage flange, WEJLOC® non-puncturing flashing collar, weepholes, bottom outlet, round top, medium-duty loose-set anti-tilting SUPER-FLO® grate with perimeter drainage slots.

- Available Options**
- ▼ -AE LEVELEZE® Adjustable Extension

▼ -81 Slotted Cast Iron Bucket

▼ -TG Tractor Grate

▼ -LC1 Locking Cover, Satin Finish Nikaloy

-LC2 Locking Cover, Satin Finish Bronze

-1 Satin Finish Nikaloy Top

-2 Satin Finish Bronze Top

-7 Ductile Iron Grate

-11 Extra-Heavy Grate, Cast Iron

-13 Dome Grate, Cast Iron

-13-1 Dome Grate, Nikaloy

-13-2 Dome Grate, Bronze

-15 Chained Grate

▼ -39 Solid Cast Iron Cover

-VP Secured Grate, Vandal-Proof Screws

-ARE Acid-Resisting Epoxy

-44 Fixed Extension Collar, Cast Iron (Specify Hgt.), 3" Std.

-44-92 Fixed Extension Collar, Galv. (Specify Hgt.), 3" Std.

-49 3/4" Primer Tap

-50 1/2" Primer Tap

-84 Stainless Steel Mesh Bucket Liner

-88 Supplementary Strainer

-92 Galvanized Cast Iron Parts

OUTLETS:

-66 No-Hub Side Outlet

-T Threaded Outlet

-X Inside Caulk Outlet

-Y Hub Outlet with Gasket

-Z No-Hub Outlet

32100 SLOT WIDTH 3/8"

32100-1 SLOT WIDTH 3/16"

32100-2 SLOT WIDTH 3/16"

○ ADD 1/4" WHEN FURNISHED WITH NIKALOY OR BRONZE TOP.

● CONFORMS WITH ASTM-C564.

FOR OUTLET TYPE SPECIFY -T, -X, -Y or -Z

TYPE NO.	PIPE SIZE	LBS.
32102	2	18
32103	3	21
32104	4	21

32100-39 SERIES

with -39 Solid Cast Iron Cover

APPLICATION

For use in unfinished floors subject to medium-duty traffic where access to drain outlet is limited by removable solid cover. Useful in regulating small solids into drain line.

SPECIFICATION

JOSAM 32100-39 Series coated cast iron Floor Drain with double drainage flange, weepholes, bottom outlet and 9" round solid scoriated cast iron cover.

- OPTIONS N/A:**
- 81, -84


● CONFORMS WITH ASTM-C564.

FOR OUTLET TYPE SPECIFY -T, -X, -Y or -Z

TYPE NO.	PIPE SIZE	LBS.
32102-39	2	22
32103-39	3	25
32104-39	4	25


32100-AE-LC1-88 SERIES w/ LEVELEZE® Ext., Nikaloy Locking Cover & Supl. Strainer

APPLICATION		
For use in pedestrian and light wheel traffic areas where drainage is not a constant factor. Solid hinged key-locking cover prevents intrusion of foreign objects, which may be swept up before cover is opened for wash down. The secondary strainer prevents debris from entering the waste line.		
SPECIFICATION		
JOSAM 32100-AE-LC1-88 Series coated cast iron LEVELEZE® Floor Drain, two-piece body with double drainage flange, WEJLOC® non-puncturing flashing collar, weep-holes, bottom outlet, round satin Nikaloy hinged key-locking cover, adjustable collar and internal strainer.		
Series 32100-AE-LC2-88 with Bronze Locking Cover		
OPTIONS N/A: -7, -11, -13, -13-1, -13-2, -15, -39, -44, -84		
TYPE NO.	PIPE SIZE	LBS.
32102-AE-LC1-88	2	31
32103-AE-LC1-88	3	32
32104-AE-LC1-88	4	33

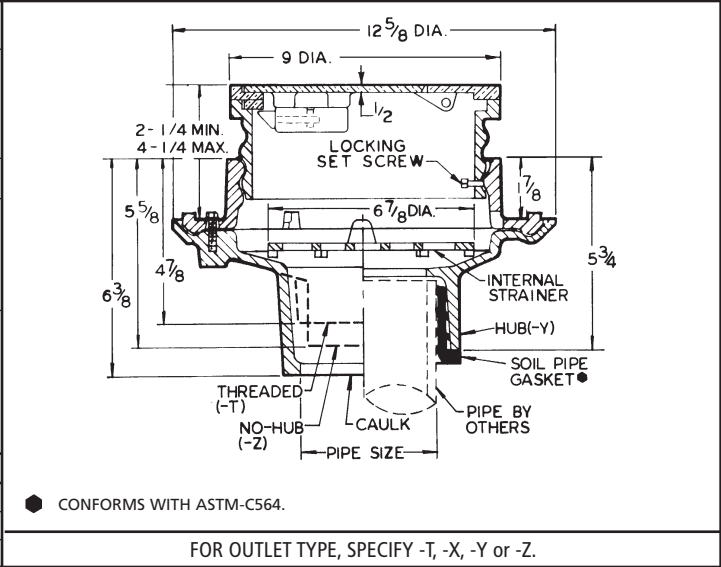

32100-AE-TG SERIES with -AE LEVELEZE® Extension & -TG 9" Tractor Top

APPLICATION		
For use in heavy traffic areas, such as warehouses, for any type of floor construction where a small to medium flow of liquid is anticipated. LEVELEZE® adjustable collar permits accurate positioning of grate to meet finished floor level.		
SPECIFICATION		
JOSAM 32100-AE-TG Series coated cast iron LEVELEZE® Floor Drain, two-piece body with double drainage flange, WEJLOC® non-puncturing flashing collar, weepholes, bottom outlet, round top, adjustable collar with rolled thread and heavy-duty, deep-set tractor grate.		
OPTIONS N/A: -11, -13, -13-1, -13-2, -39, -44, -81, -84		
32100-AE-TG	SLOT WIDTH 1/2"	
32100-AE-TG-1	SLOT WIDTH 7/16"	
32100-AE-TG-2	SLOT WIDTH 7/16"	
TYPE NO.	PIPE SIZE	LBS.
32102-AE-TG	2	33
32103-AE-TG	3	35
32104-AE-TG	4	37

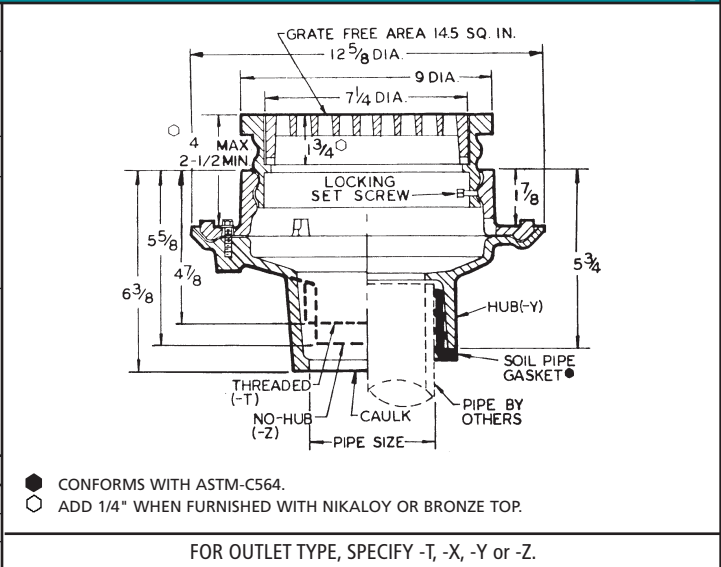

32100-TG SERIES with -TG 9" Tractor Top

APPLICATION		
For use in heavy traffic areas such as garages and loading docks for any type of floor construction where a small to medium flow of liquid is anticipated.		
SPECIFICATION		
JOSAM 32100-TG Series coated cast iron Floor Drain, two-piece body with double drainage flange, WEJLOC® non-puncturing flashing collar, weepholes, bottom outlet, round top and heavy-duty, loose-set tractor grate.		
OPTIONS N/A: -11, -13, -13-1, -13-2, -39, -81, -84,		
SLOT WIDTH 3/8"		
TYPE NO.	PIPE SIZE	LBS.
32102-TG	2	25
32103-TG	3	26
32104-TG	4	27

