

Location: **MI-SF****SURFACE ACCESS DOOR**

Specification: MIFAB Series MI-SF surface access door is designed for surface installation on drywall, masonry, or thin-coat plaster. The door is attached to the frame with a continuous piano hinge allowing 175 degree opening. It has a unique white finish.



Material: MI-SF Series is 16 gage steel door and frame. The MI-SFSS Stainless Steel Series is 16 gage #304 stainless steel door and frame.

Finish: Satin coat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

Door: Flush to frame. One 1/4" (6) hole in each corner. A 3/8" (9) wide outer perimeter space of the frame is bent on a fifteen degree angle toward the wall.

Hinge: Continuous piano hinge. 175 degree opening.

Latch: Standard – Flush mounted, screwdriver operated cam. Optional – Allen key, cylinder key, or vandal resistant latch. All of MIFAB's cylinder key locks are keyed alike.

Packaging: Individual pack.

SUFFIX OPTIONAL VARIATIONS


- ☐ -A Allen key lock
- ☐ -BA Buy American Act compliant product
- ☐ -C Cylinder key lock
- ☐ -PA Pennsylvania Steel Act compliant product
- ☐ -VP Vandal resistant hardware
(VP Screwdriver included)

"B" x "A"	SHIP WEIGHT (Lbs.)	LATCHES	MILD STEEL MODEL #	STAINLESS STEEL MODEL #
8" x 8"	2.5	1	MI-SF0808	MI-SFSS0808
10" x 10"	3.5	1	MI-SF1010	MI-SFSS1010
12" x 12"	4.0	1	MI-SF1212	MI-SFSS1212
14" x 14"	6.0	1	MI-SF1414	MI-SFSS1414
16" x 16"	8.0	1	MI-SF1616	MI-SFSS1616
18" x 18"	9.5	3	MI-SF1818	MI-SFSS1818
22" x 22"	13.5	3	MI-SF2222	MI-SFSS2222
24" x 24"	16.0	3	MI-SF2424	MI-SFSS2424

A-B Door Size

C-D Overall Dimensions - Door Size - Plus 3" (76)

E-F Wall Opening - Door Size

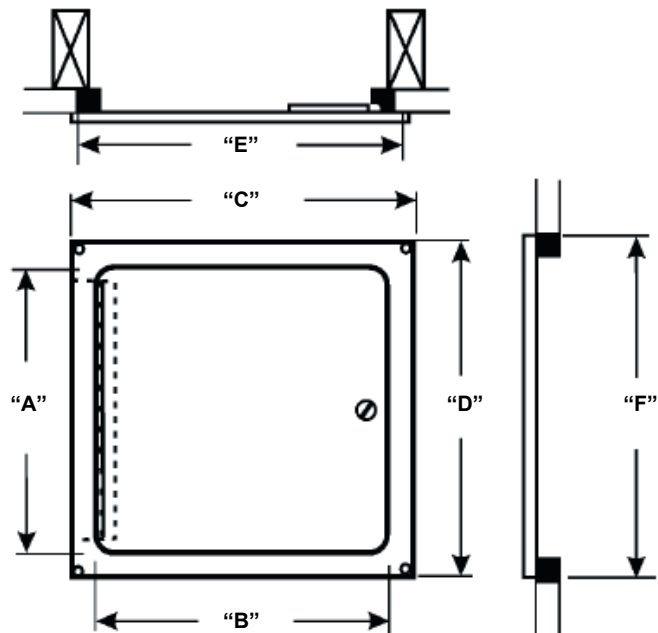

(Dimension) Denotes Millimetres

Note: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

Job Name:
 Section No:
 Schedule No:

Page No:
 Contract:
 Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice or obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880