

Location: _____



P3120


12" x 12" Stainless Steel Fabricated Floor Drain with Solid Cover & Perimeter Drainage

SPECIFICATION:

MIFAB® Series P3120, 12" x 12" heavy duty floor drain with solid cover and perimeter drainage opening. Body is manufactured out of 16 gauge, Type 304 stainless steel. Solid cover is ½" thick Type 304 stainless steel with a Load Class "C" heavy duty cover. Free area of 8 square inches. Bottom outlets are available in 2", 3", 4" or 6" no hub outlet connections (specify outlet size) and fabricated as part of the floor drain. Also available with an optional anchor flange (Suffix -FL) and D or E load rated cover.

FUNCTION:

Used in industrial, commercial, kitchen and other hygienic areas such as dairies. Type 304 stainless steel construction provides for ease of cleaning, maintenance and sanitary installation. All grate openings are polished to a smooth finish.

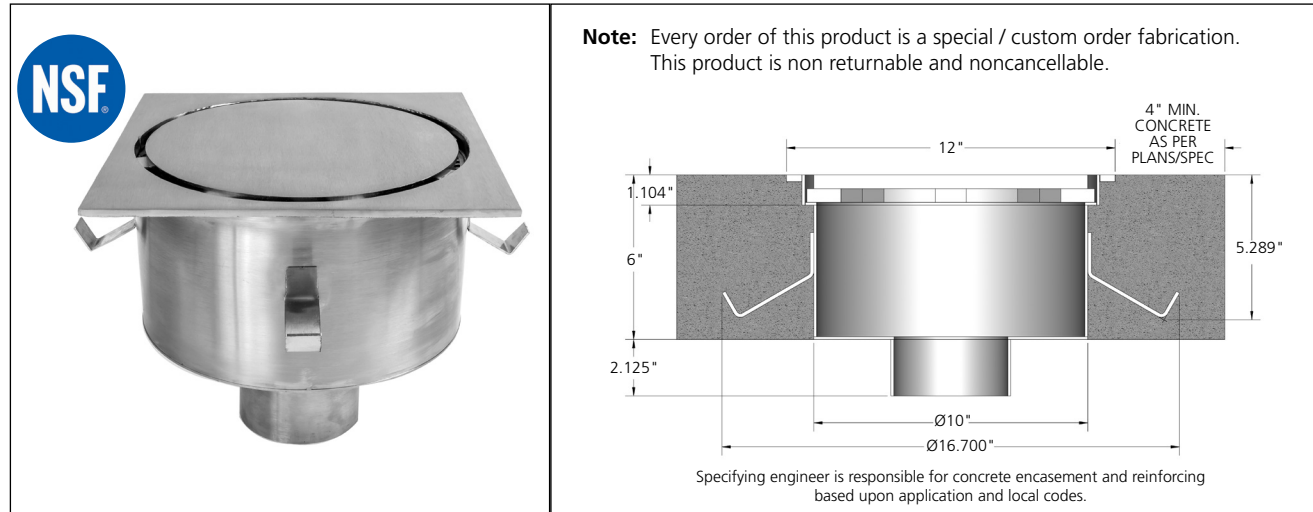

The P3120-LCE is NSF certified with a load classification of Special Duty.

MODEL NUMBER	DESCRIPTION
☐ P3120	12" x 12", Type 304 Stainless Steel Fabricated Floor Drain with Solid Cover and Perimeter Drainage, 16 Gauge Body (Load Class "C", "Heavy Duty" grate)
☐ P3120-29	12" x 12", Type 316 Stainless Steel Fabricated Floor Drain with Solid Cover and Perimeter Drainage, 16 Gauge Body (Load Class "C", "Heavy Duty" grate)

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
☐ -C	Membrane Clamp (Two pieces)	☐ T	Threaded outlet
☐ -FL	Anchor Flange	☐ X	Inside caulk outlet
☐ -LCD	Load Class "D", Extra Heavy Duty Grate (7,500 - 10,000 lbs.)	☐ -5	Sediment Bucket
☐ -LCE	Load Class "E", (over 10,000 lbs.) Solid Cover	☐ -6	Vandal Resistant Grate
☐ -LF	Round top body without square frame	☐ -7	Trap Seal Primer Tapping (1/2")
☐ -MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")	☐ -7MG	MI-GARD trap seal protection device (available for 2", 3" & 4" outlet connections)
☐ P	Push on outlet	☐ -21	Secondary Strainer (in outlet)
☐ -SGC	Solid, gasketed cover with removable pull ring		
☐ -SO	Put 2, 3, 4 or 6 in the last of the four digits of the model # to indicate the side outlet connection size and add suffix -SO. Eg. P2064-SO for a 4" side outlet.		

Note: No hub bottom outlet connections are standard. Specify 2, 3, 4 or 6 in the last of the four digit model number to indicate the bottom no hub outlet size. For the 6" bottom outlet size, please add \$75.00 for Type 304 and \$100.00 for Type 316 stainless steel. Eg. 4" no hub bottom outlet would be model # P3084.

Job Name: _____	Page No: _____
Section No: _____	Contract: _____
Schedule No: _____	Purchase Order No: _____