


9200 SERIES

Mercury-Free Deluxe Mechanical Thermostats
Horizontal/Vertical | 24V AC

Robertshaw®

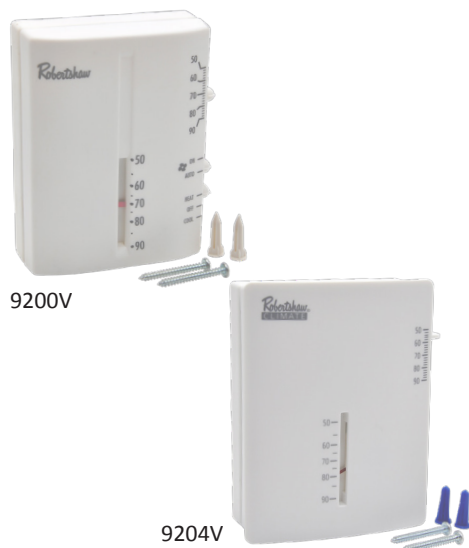

Features and Benefits

- No sub-base required
- J-box-compatible
- Simple base and cover design
- No leveling or special disposal; faster installation
- Heavy-duty adjustable heat anticipator
- Replace many competing models

Description

Robertshaw® 9200 Series Deluxe Mechanical thermostats are designed for easy installation, attractiveness and functionality. Replacements for more than 50 competitive models, they minimize inventory.

Installation-friendly design.

- Wall-mountable base frees both hands for wiring
- J-box-compatible: Meets code, speeds installation

Attractive, easy to use.

- Contemporary design
- Easy-to-read temperature display

Feature heat anticipation precision.

- Many anticipation settings
- Enables use on a wide range of heating equipment

Reliable quality.

- Robertshaw: manufacturer of quality products for more than 100 years

Specifications

Common

Electrical rating	24V AC (18 to 30V AC), 2 amp maximum / 240 to 750 millivolts
Anticipation	Fixed 0.2 to 1.6 amps (24V) / fixed 1.8 amps (240 to 750 mV)
Temperature control range	50°F to 90°F (10°C to 32°C)
Accuracy	± 2°F

9200H / V

- 1 heat/1 cool
- Fixed 4700 ohms cooling anticipation
- Positive-off switch ensures system shutdown
- Switch action: SPDT
- Terminations: W, Y, O, G, Rc, Rh, B
- System switch and fan switch included

9204H / V

- Heat only
- 24V AC (18 to 30V AC), 2 amp maximum / 240 to 750 millivolts
- Switch action: SPST
- Terminations: W, Rh

Replacement Information

Verify specific application requirements before substitution.

9200H	Honeywell	T8034N1007
9200V	Honeywell	T834N1002
9204V	Honeywell	T822K1000, T822K1018, T827K1009, T822K1042

**1 Year
Limited
Warranty**

Robertshaw

Customer Service +1.800.304.6563
HVACCustomerService@robertshaw.com
www.robertshaw.com

©2021 Robertshaw
3/21 - 150-2816