

32" CHANNEL DRAIN FLAT GRATE SUCTION OUTLET COVER AND ABS THREE-PORT MANUFACTURED SUMP FOR VINYL



**VGB CERTIFIED
SPECIFICATIONS**

Floor Flow Rating
316 GPM at 3.9 fps

Wall Flow Rating
208 GPM at 2.6 fps

Sump Depth
Use sump included

Open Area
25.9 in²

FEATURES

Meets or exceeds ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing

Permanently attached gasket reduces gasket alignment problems

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

Must use transitional glue when attaching to PVC pipe

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more.

Replace drain cover every five years from the date of installation

1 per case

Unblockable!



Part # 32CDFLVxxx

Two drains in one!



STANDARD COLORS

- 32CDFLV101 – White
- 32CDFLV102 – Black
- 32CDFLV103 – Light Gray
- 32CDFLV104 – Blue
- 32CDFLV105 – Dark Gray
- 32CDFLV108 – Tan

Also available as cover only
p/n 32CDFLNFVxxx
24 per case

Also available as sump only
p/n 32CDSBV101
4 per case

VGB 2008 Compliant

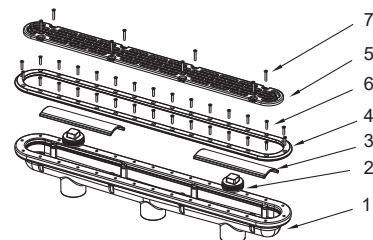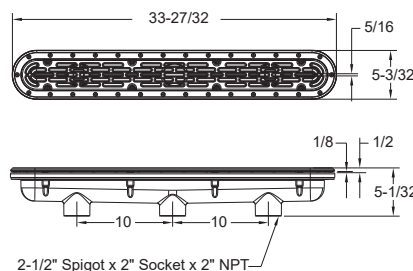

1. 32" Three-Port Manufactured Vinyl Sump Bucket With Gasket
2. 2" Tapered Threaded Pipe Plug, Qty 2
3. Port Divider
4. 32" Channel Drain Vinyl Clamping Ring With Gasket
5. 32" Channel Drain Flush Cover
6. 10 x 1" Flat Head Phillips Screw, 316 SS, Qty 30
7. 10 x 1-1/4" Flat Head Phillips Screw, 316 SS, Qty 8

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com